

LS-DYNA

EXAMPLES MANUAL

June 2001

Copyright © 1989-2001
LIVERMORE SOFTWARE
TECHNOLOGY CORPORATION
All Rights Reserved

Written By

John D. Reid, Ph.D.
Department of Mechanical Engineering
University of Nebraska-Lincoln

Mailing Address:

Livermore Software Technology Corporation
2876 Waverley Way
Livermore, California 94550-1740

Support Address:

Livermore Software Technology Corporation
7374 Las Positas Road
Livermore, California 94550

FAX: 925-449-2507
TEL: 925-449-2500
EMAIL: sales@lstc.com

Copyright © 1989-2001 by Livermore Software Technology Corporation
All Rights Reserved

TABLE OF CONTENTS

TABLE OF CONTENTS

INTRODUCTION	1
*AIRBAG	3
Airbag Deploys into Cylinder	3
*BOUNDARY_PRESCRIBED_MOTION	11
Blow Molding	11
*CONSTRAINED	19
Two Plates Connected With Butt Welds.....	19
Sliding Blocks With Planar Joint.....	27
Hinged Shell With Stop Angle (Revolute Joint).....	35
Linearly Constrained Plate.....	41
Impulsively Loaded Cap With Shells and Solids.....	47
Spot Weld Secures Two Plates	55
*CONTACT	61
Shell Rebounds From Plate Using Five Contact Types	61
Projectile Penetrates Plate.....	69
Rigid Sphere Impacts a Plate at High Speed.....	75
Corrugated Sheet Contacts Edges	83
Discrete Nodes Tied to a Surface.....	89
*CONTACT_ENTITY	95
Rigid Sphere Impacts Plate	95
*CONTROL	101
CONTACT: Hemispherical Punch	101
DAMPING: Cantilever Beam	109
ENERGY: Bar Impact	117
SHELL: Hemispherical Load.....	123
SHELL: Twisted Cantilever Beam	129
TIMESTEP: Billet Upset	135
*CONTROL_ADAPTIVE	141
Deep Drawing With Adaptivity	141
Square Crush Tube With Adaptivity.....	149
Cylinder Undergoing Deformation With Adaptivity	155

TABLE OF CONTENTS

*DAMPING_GLOBAL.....	161
Tire Bounces on the Ground and Damps Out	161
*DEFORMABLE_TO_RIGID	167
Interaction of Pendulums	167
*INTEGRATION_SHELL	175
Cantilever Beam With Lobotto Integration.....	175
*INTERFACE_COMPONENT	181
An Interface File Controls the Response of a Cube	181
*LOAD_BODY	191
GENERALIZED: Rotating Elements	191
Z: Tire Under Gravity Loading Bounces on a Rigid Wall	197
*MAT	203
Frazer-Nash Single Element.....	203
Piecewise Linear Plasticity Fragmenting Plate	209
Rigid Sliding Block in Local Coordinate System	215
Soil and Foam Single Element.....	221
Belted Dummy With Springs	227
Rectangular Cup Drawing.....	239
*RIGIDWALL.....	247
Rigid Wall Sphere Impacts a Plate.....	247
Rotating Shell Strikes Rigid Wall	253
Cube Rebounding.....	259
Symmetric Crush Tube	265
*SECTION	271
SHELL: Fuse Plate in Tension Exhibits Hourgassing	271
SOLID: Breaking Post Exhibits Hourgassing	277
ACKNOWLEDGMENTS	285
REFERENCES	287
INDEX.....	289

INTRODUCTION

This is an assembly of example problems provided by a number of resources. The resources and histories are documented in the acknowledgment and reference sections. Users are encouraged to submit examples which will facilitate the education of LS-DYNA users.

October 1997 Modifications

- All examples were documented and re-organized for clarity.
- All examples ran successfully using LS-DYNA version 940 on a Sun SPARC 10 workstation.
- Many examples required changes to make them work. Descriptions of the examples were updated to reflect the examples as they are as of this date.
- All graphics in this edition have been replaced with newly created results using LS-TAURUS on the Sun SPARC 10 workstation.
- Many new examples were added to the manual.
- The examples are now strictly in keyword format. References to ingrid and structured format have been removed for they are no longer consistent with these examples.
- Naming Conventions for the examples have been changed as described below.

Naming Convention

The naming convention for the input decks is: keyword.description.k Keyword defines the major keyword used within the example. Description defines either the action or the physical content of the problem. The “.k” on the end of the filename signifies that the file is a keyword format LS-DYNA input file.

INTRODUCTION

***AIRBAG_SIMPLE_AIRBAG_MODEL**
Airbag Deploys into Cylinder

LS-DYNA Manual Section: *AIRBAG_SIMPLE_AIRBAG_MODEL

Additional Sections:

*CONTACT_NODES_TO_SURFACE
*RIGIDWALL_PLANAR

Example: Airbag Deploys into Cylinder

Filename: airbag.deploy.k

Description:

An airbag inflates below a rigid cylinder, causing the cylinder to fly into the air.

Model:

The volume pressure relationships is defined by the Simple Airbag Model for control volumes. The bag inflates through the flow of mass into the bag.

Input:

The control volume defines the thermodynamic relationship for the gas in terms of parameters such as heat capacity, gas temperature, incoming mass, and outgoing mass (*AIRBAG_SIMPLE_AIRBAG_MODEL). A rigidwall is used below the airbag to act as ground (*RIGIDWALL_PLANAR). A ground is displayed using rigid shell elements, but is used only for visualization purposes. The contact between the airbag and the cylinder is automatically generated by part id (*CONTACT_NODES_TO_SURFACE).

Results:

The plots show the bag expanding. The ASCII file abstat contains information on the computed pressure, volume, mass flow and internal energy of the control volume (*DATABASE_ABSTAT).

*AIRBAG_SIMPLE_AIRBAG_MODEL

Airbag Deploys into Cylinder

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Airbag and Structure
$
$ LSTC Example
$
$ Last Modified: August 29, 1997
$
$ Airbag with a cylinder on top, deploys and pushes the cylinder into the air.
$
$ Airbag is approximately 19 x 25 inches, with 0.015 in thickness
$
$
$ Units: lbf-s^2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
  3.000E-02
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
      2           2            2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
      1           3
$
*DATABSE_BINARY_D3PLOT
$    dt        lcdt
  5.000E-04
$
*DATABSE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
$
$    cmpflg      ieverp      beamip
      1
$
*DATABSE_BINARY_D3THDT
$    dt        lcdt
  999999
$
$
*DATABSE_ABSTAT
$    dt
  2.000E-04
$
*DATABSE_GLSTAT
$    dt
  2.000E-04
$
$
*DATABSE_MATSUM
$    dt
  2.000E-04
```

***AIRBAG_SIMPLE_AIRBAG_MODEL**
Airbag Deploys into Cylinder

```
$  
*DATABASE_RCFORC  
$      dt  
2.000E-04  
$  
*DATABASE_RBDOUT  
$      dt  
2.000E-04  
$  
*DATABASE_RWFORC  
$      dt  
2.000E-04  
$  
$$$$$ Airbag  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*AIRBAG_SIMPLE_AIRBAG_MODEL  
$      sid      sidtyp      rbid      vsca      psca      vini      mwd      spsf  
1          1  
$  
$      cv      cp      t      lcid      mu      a      pe      ro  
1.736E+03 2.430E+03 1.200E+03      1 7.000E-01 0.000E+00 1.470E+01 3.821E-06  
$  
$      lou  
$  
*SET_PART_LIST  
$      sid      da1      da2      da3      da4  
1  
$  
$      pid1      pid2      pid3      pid4      pid5      pid6      pid7      pid8  
3  
$  
*DEFINE_CURVE  
$      lcid      sidr      scla      sclo      offa      offo  
1  
$  
$      abscissa      ordinate  
0.000E+00 0.000E+00  
3.200E-02 2.600E+01  
4.500E-02 6.000E-01  
8.000E-02 1.000E-01  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Rigid Walls  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Ground  
$  
*RIGIDWALL_PLANAR  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$      nsid      nsidex      boxid  
0          0          0  
$      xt      yt      zt      xh      yh      zh      fric  
0.0      0.0      0.0      0.0      1.0      0.0      0.5  
$
```

***AIRBAG_SIMPLE_AIRBAG_MODEL**

Airbag Deploys into Cylinder

***AIRBAG_SIMPLE_AIRBAG_MODEL**
Airbag Deploys into Cylinder

```

$ lco/a1      a2      a3      v1      v2      v3
$ 
$ *MAT_FABRIC
$   mid      ro      ea      eb      ec      prba      prca      prcb
$     3    1.00e-4  2.00e+6  2.00e+6  2.00e+6  0.35  0.35  0.35
$   gab      gbc     gca      gse      el      prl      lratio      damp
$   1.53e+6  1.53e+6  1.53e+6
$ aopt
$ 
$ xp      yp      zp      a1      a2      a3
$ 
$ v1      v2      v3      d1      d2      d3
$ 
$ $$$$$$  Sections
$ 
$ *SECTION_SHELL
$   sid      elform      shrf      nip      propt      qr/irid      icomp
$     1        0
$   t1      t2      t3      t4      nloc
$   0.500  0.500  0.500  0.500
$ 
$ *SECTION_SHELL
$   sid      elform      shrf      nip      propt      qr/irid      icomp
$     2        9
$   t1      t2      t3      t4      nloc
$   0.015  0.015  0.015  0.015
$ 
$ b1      b2      b3      b4      b5      b6      b7      b8
$ 
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$ $$$ Define Nodes and Elements
$ 
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$ ....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$   nid      x      y      z      tc      rc
*NODE
  3722 2.25000000E+00 2.50000000E+00 -1.25000000E+01
  3723 2.20677000E+00 2.93895000E+00 -1.25000000E+01
  3724 2.07873000E+00 3.36104000E+00 -1.25000000E+01
  .
  ... in total, 3867 nodes defined
  .
  7586 1.20000000E+01 0.00000000E+00 -1.17000000E+01
  7587 -1.20000000E+01 0.00000000E+00 -1.30000000E+01
  7588 1.20000000E+01 0.00000000E+00 -1.30000000E+01
$ 
$ $$$$ Elements
$ 
$ *ELEMENT_SHELL
$   eid      pid      n1      n2      n3      n4

```

***AIRBAG_SIMPLE_AIRBAG_MODEL**

Airbag Deploys into Cylinder

```
6993      1    7547    7509    7148    7549  
6994      1    7509    7510    7149    7148  
6995      1    7510    7511    7150    7149
```

```
.
```

```
... in total, 3792 shells defined
```

```
.
```

```
6990      3    7078    7048    7144    7145  
6991      3    7108    7078    7145    7146  
6992      3    5998    7108    7146    7147
```

```
$
```


```
*END
```

*AIRBAG_SIMPLE_AIRBAG_MODEL


Airbag Deploys into Cylinder

Results:

taurus g=d3plot
19
state 15 rx 20 view

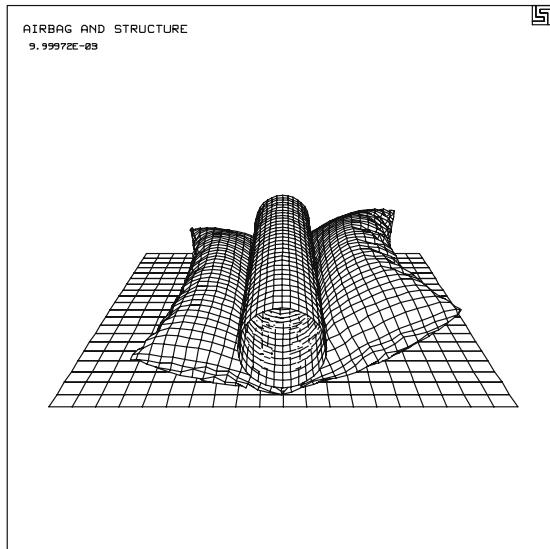

phs3
abstat
grid oset 0
180 pressure

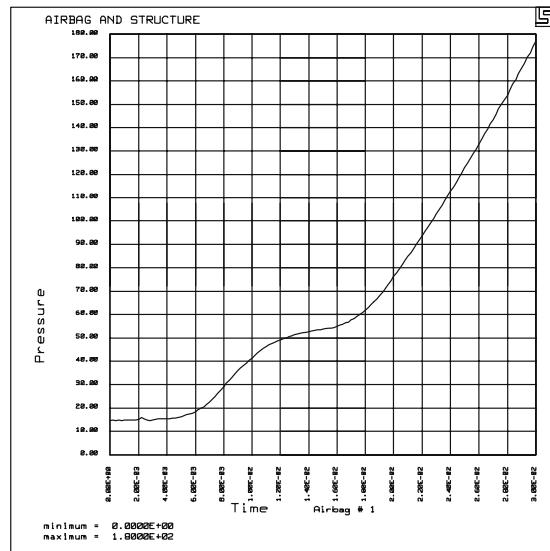

***AIRBAG_SIMPLE_AIRBAG_MODEL**

Airbag Deploys into Cylinder

***BOUNDARY_PRESCRIBED_MOTION**

Blow Molding

LS-DYNA Manual Section: *BOUNDARY_PRESCRIBED_MOTION

Additional Sections:

*LOAD_SEGMENT

Example: Blow Molding

Filename: boundary_prescribed_motion.blow-mold.k

Description:

This problem includes two tools, a punch nose and a die tube. A blank tube is formed by blow molding the nose through the tube.

Model:

The hollow tube blank is made with 600 shell elements AND has an outer radius of 12.06 mm, an initial thickness of 1.37 mm, and an initial length of 53.5 mm. The internal pressure of the hollow tube blank is 40 N/mm² applied using the *LOAD_SEGMENT keyword. The tools are rigid shell elements. Only 1/4 of the system is modeled because of symmetry.

The motion of the punch nose and the end of the blank follow a linear motion with a total displacement of 15 mm (*BOUNDARY_PRESCRIBED_MOTION).

Reference:

Wei, Lixin

*BOUNDARY_PRESCRIBED_MOTION

Blow Molding

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
BLOWING MOLD
$
$ LSTC/KBS2 Example
$
$ Last Modified: October 21, 1997
$
$ Units: ton, mm, s, N, MPa, N-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$ endtim    endcyc      dtmin     endneg     endmas
  .150E-01        0       .000       .000       .000
$
*CONTROL_TIMESTEP
$ dtinit      scft       isdo      tslimt      dtms      lctm      erode      ms1st
  .000        .400        0
$
*CONTROL_BULK_VISCOSITY
$ Q2          Q1
  1.500        .060
$
*CONTROL_CONTACT
$ slsfac      rwpnal      islchk      shlthk      penopt      thkchg      orien
  .100
$ usrstr       usrfrc      nsbccs      interm      xpene       ssthk      ecdt      tiedprj
  0            0           10           0           4.000
$
*CONTROL_DYNAMIC_RELAXATION
$ nrcyck      drtol      drfcctr      drterm      tssfdr      irelal      edttl      idrflg
  250         .001        .995
$
*CONTROL_ENERGY
$ hgen        rwen      slnten      rylen
  2            2           2           2
$
*CONTROL_HOURGLASS
$ ihq          qh
  1            .100
$
*CONTROL_OUTPUT
$ npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
  1            3           0           0           .000           0           100
$
$
*DATABSE_BINARY_D3PLOT
$ dt      lcdt
  .200E-03
$
*DATABSE_BINARY_D3THDT
$ dt      lcdt
  .000E+00
$
```

*BOUNDARY_PRESCRIBED_MOTION

Blow Molding

```

*DATABASE_EXTENT_BINARY
$ neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
$      0          0          3          0          1          1          1          1
$ cmpflg      ieverp      beamip
$      0          0          0          0          0          0
$ 
$ *DATABASE_GLSTAT
$ dt
$ .100E-03
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Define Contacts - Sliding Interfaces
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*$CONTACT_SURFACE_TO_SURFACE_TITLE
$ cid      name
$      3        IF1
$ 
$ ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$      3        2         3         3          0          0          0          0
$ 
$ fs       fd       dc       vc       vdc      penchk      bt       dt
$ 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0          0.000E+00 1.000E+20
$ 
$ sfs      sfm      sst      mst      sfst      sfmt      fsf      vsf
$ .100E+01 .100E+01           .098E+01 .098E+01 .100E+01 .100E+01
$ 
$ 
*$CONTACT_SURFACE_TO_SURFACE_TITLE
$ cid      name
$      4        IF4
$ 
$ ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$      1        3         3         3          0          0          0          0
$ 
$ fs       fd       dc       vc       vdc      penchk      bt       dt
$ 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0          0.000E+00 1.000E+20
$ 
$ sfs      sfm      sst      mst      sfst      sfmt      fsf      vsf
$ .100E+01 .100E+01           .095E+01 .095E+01 .100E+01 .100E+01
$ 
$ 
*$CONTACT_SINGLE_SURFACE_TITLE
$ cid      name
$      5        IF5
$ 
$ ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$      3        0         3         0          0          0          0          0
$ 
$ fs       fd       dc       vc       vdc      penchk      bt       dt
$ 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0          0.000E+00 1.000E+20
$ 
$ sfs      sfm      sst      mst      sfst      sfmt      fsf      vsf
$ .100E+01 .100E+01           .100E+01 .100E+01 .100E+01 .100E+01
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Define Parts and Materials
$ 

```

***BOUNDARY_PRESCRIBED_MOTION**

Blow Molding

*BOUNDARY_PRESCRIBED_MOTION Blow Molding

```

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*BOUNDARY_PRESCRIBED_MOTION_RIGID
$    pid      dof      vad      lcid      sf      vid      death
      2          3          2          1      -15.0
$
*BOUNDARY_PRESCRIBED_MOTION_SET
$    nsid      dof      vad      lcid      sf      vid      death
      1          3          2          1      -15.0
$
*DEFINE_CURVE
$    lcid      sidr      scla      sclo      offa      offo
      1          0
$        abscissa      ordinate
      .000000000E+00      .000000000E+00
      .165000000E-01      .110000000E+01
$
*SET_NODE_LIST
$    sid
      1
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
      3061      3062      3093      3124      3155      3186      3217      3248
      3279      3310      3341      3372      3403      3434      3465      3496
      3527      3558      3589      3620      3651
$
*BOUNDARY_SPC_NODE
$    nid      cid      dofpx      dofpy      dofz      dofrx      dofry      dofrz
      3001      0          0          1          1          1          1          1
      3002      0          0          1          0          1          0          1
.
  ...  in total, 81 SPC's defined
.
      3650      0          0          1          0          1          0          1
      3651      0          0          1          0          1          0          1
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Define Loading Conditions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*LOAD_SEGMENT
$    lcid      sf      at      n1      n2      n3      n4
      1      40.000            3001      3002      3003      3004
      1      40.000            3002      3005      3006      3003
.
  ...  in total, 600 pressure loads defined
.
      1      40.000            3618      3619      3650      3649
      1      40.000            3619      3620      3651      3650
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Define Nodes and Elements
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
```

***BOUNDARY_PRESCRIBED_MOTION**

Blow Molding


```
*NODE
$    nid          x          y          z      tc      rc
  1001   .130103000E+02 -.113825400E+01  .535000000E+02
  1002   .129937800E+02  .126376400E+01  .535000000E+02
  .
  ...  in total, 1437 nodes defined
  .
  3650  -.113750000E+02  .442958800E-05  .517166600E+02
  3651  -.113750000E+02  .442958800E-05  .534999900E+02
$
$$$$$$$$$     Shell Elements
$
*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
  1001        1    1001    1002    1003    1004
  1002        1    1004    1003    1005    1006
  .
  ...  in total, 1313 shells defined
  .
  2197        2    2226    2187    2198    2227
  2198        2    2227    2198    2209    2228
$
```

```
*END
```


*BOUNDARY_PRESCRIBED_MOTION Blow Molding

Results:

taurus g=d3plot
angle 1 rz -90 ry 90 -m 1 dist 6000
ytrans 40 view ytrans -50 s 35 over view

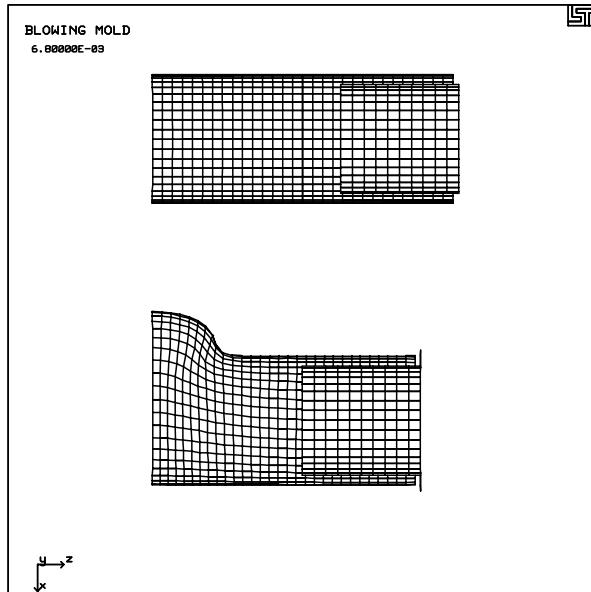

s 75
ry 30
center view

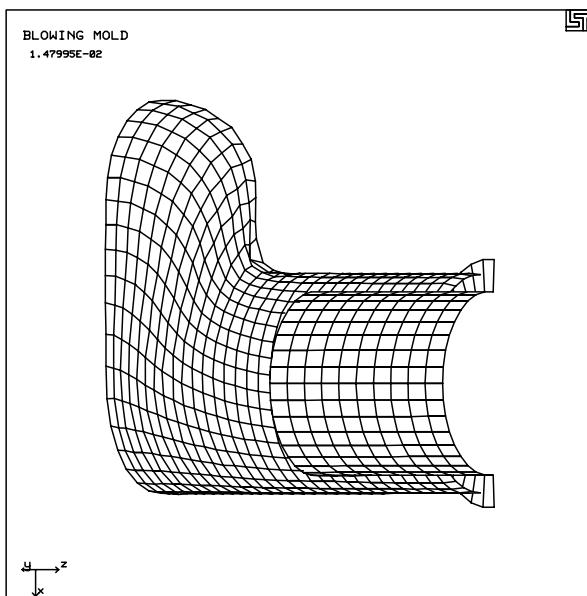

***BOUNDARY_PRESCRIBED_MOTION**

Blow Molding

*CONSTRAINED_GENERALIZED_WELD

Two Plates Connected With Butt Welds

LS-DYNA Manual Section: *CONSTRAINED_GENERALIZED_WELD

Additional Sections:

*DATABASE_CROSS_SECTION_PLANE

Example: Two Plates Connected with Butt Welds

Filename: constrained.butt-weld.k

Description:

Two plates are connected by four butt welds. The plates are pulled apart and the center two welds fail.

Model:

Each plate is constructed with 12 shell elements. One end of one plate is fixed with SPC's. One end of the other plate has a prescribed motion condition defined. The other ends of the plates are butt welded together with failure criteria. Cross sections are defined through each plate to monitor the forces through the plates as they are pulled apart.

Results:

```
butt weld constraint failed between nodes      35 & 23
: Time      = 1.26913E+00 : xl-force    = 5.56053E+00
: yl-force   = 2.28915E-03 : zl-force    = -1.93680E-07
: xl-moment = -3.16675E-07 : yl-moment   = 9.09511E-07
: plastic ep= 0.00000E+00
```

Stresses in weld:

```
: signn     = 2.78026E-01 : tautn      = 0.00000E+00
: signm     = 9.09511E-08 : tautm      = 0.00000E+00
: signs     = 0.00000E+00 : tauts      = 1.14458E-04
: tautw     = -9.68398E-09
```

```
butt weld constraint failed between nodes      37 & 25
: Time      = 1.26913E+00 : xl-force    = 5.56054E+00
: yl-force   = -2.29328E-03 : zl-force    = -2.41027E-07
: xl-moment = 2.97763E-07 : yl-moment   = 3.22515E-07
: plastic ep= 0.00000E+00
```

Stresses in weld:

```
: signn     = 2.78027E-01 : tautn      = 0.00000E+00
: signm     = 3.22515E-08 : tautm      = 0.00000E+00
: signs     = 0.00000E+00 : tauts      = -1.14664E-04
: tautw     = -1.20514E-08
```

*CONSTRAINED_GENERALIZED_WELD

Two Plates Connected With Butt Welds

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Two plates connected with a Butt Weld
$
$ LSTC Example
$
$ Last Modified: October 16, 1997
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
      3.01
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
      2          2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
      1          3
$
*CONTROL_SHELL
$    wrpang      itrists     irnxx      istupd      theory      bwc       miter
      1          6
$
$
*DATABASE_BINARY_D3PLOT
$    dt         lcdt
      0.2
$
*DATABASE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
$
$    cmpflg      ieverp      beamip
      1
$
*DATABASE_BINARY_D3THDT
$    dt         lcdt
      999999
$
*DATABASE_GLSTAT
$    dt
      0.1
$
*DATABASE_MATSUM
$    dt
      0.1
$
*DATABASE_NODOUT
$    dt
```

*CONSTRAINED_GENERALIZED_WELD

Two Plates Connected With Butt Welds

```

0.1
$ *DATABASE_HISTORY_NODE
$     id1      id2      id3      id4
$       22       23       35       36
$ *DATABASE_SECFORC
$     dt
$       0.010
$ *DATABASE_CROSS_SECTION_PLANE
$     Define Cross Sections
$ *DATABASE_CROSS_SECTION_PLANE
$     .>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *DATABASE_CROSS_SECTION_PLANE
$     psid      xct      yct      zct      xch      ych      zch
$       0        15.0     0.0      0.0     100.0    0.0      0.0
$     xhev      yhev      xhev      lenl      lenm
$       15.0     1.0      0.0
$ *DATABASE_CROSS_SECTION_PLANE
$     psid      xct      yct      zct      xch      ych      zch
$       0        65.0     0.0      0.0     100.0    0.0      0.0
$     xhev      yhev      xhev      lenl      lenm
$       65.0     1.0      0.0
$ *CONSTRAINED_GENERALIZED_WELD_BUTT
$     Constrain the Plates Together with 4 Butt welds
$ *SET_NODE_LIST
$     nsid      cid
$       21
$     tfail      epsf      sigy      beta      L          D          Lt
$       0.3      0.250     0.9      10.0      2.0      1.0
$ *SET_NODE_LIST
$     sid
$       21
$     nid1      nid2
$       21       33
$ *CONSTRAINED_GENERALIZED_WELD_BUTT
$     weld 1
$ *CONSTRAINED_GENERALIZED_WELD_BUTT
$     nsid      cid
$       23
$     tfail      epsf      sigy      beta      L          D          Lt
$       0.3      0.250     0.9      10.0      2.0      1.0
$ *CONSTRAINED_GENERALIZED_WELD_BUTT
$     weld 2
$ *CONSTRAINED_GENERALIZED_WELD_BUTT
$     nsid      cid
$       23
$     tfail      epsf      sigy      beta      L          D          Lt
$       0.3      0.250     0.9      10.0      2.0      1.0

```

*CONSTRAINED_GENERALIZED_WELD

Two Plates Connected With Butt Welds

```
$
*SET_NODE_LIST
$      sid
       23
$      nid1      nid2
       23          35
$ 
$ 
$$$$$  weld 3
$ 
*CONSTRAINED_GENERALIZED_WELD_BUTT
$      nsid      cid
       25
$ 
$      tfail      epsf      sigy      beta        L          D          Lt
$ 
$           0.3      0.250     0.9       10.0      2.0        1.0
$ 
*SET_NODE_LIST
$      sid
       25
$      nid1      nid2
       25          37
$ 
$ 
$$$$$  weld 4
$ 
*CONSTRAINED_GENERALIZED_WELD_BUTT
$      nsid      cid
       27
$ 
$      tfail      epsf      sigy      beta        L          D          Lt
$ 
$           0.3      0.250     0.9       10.0      2.0        1.0
$ 
*SET_NODE_LIST
$      sid
       27
$      nid1      nid2
       27          39
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$$  Boundary Conditions
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
$$$  Fix left end nodes
$ 
*BOUNDARY_SPC_NODE
$      nid      cid      dofxf      dofy      dofz      dofrx      dofry      dofrz
$      20          0          1          1          1          1          1          1
$      22          0          1          1          1          1          1          1
$      24          0          1          1          1          1          1          1
$      26          0          1          1          1          1          1          1
$ 
$ 
$$$  Prescribe motion to right end nodes
$ 
*BOUNDARY_PRESCRIBED_MOTION_SET
$      nid      dof      vad      lcid      sf          vid
$      1          1          0          1          1.0         0
```

*CONSTRAINED_GENERALIZED_WELD

Two Plates Connected With Butt Welds

```

$ *DEFINE_CURVE
$ lcid      sidr      scla      sclo      offa      offo
$      1
$ abscissa      ordinate
$      0.0000      0.0
$      5.0000      2.0000
$     20.0000      2.0000
$ *SET_NODE_LIST
$ sid
$      1
$ nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$      34       36       38       40
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$$ Define Parts and Materials
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *PART
$ pid      sid      mid      eosid      hgid      grav      adpopt
plate1      2          2          1
plate2      3          2          1
$ $$$$ Materials
$ *MAT_PLASTIC_KINEMATIC
$ mid      ro      e      pr      sigy      etan      beta
$      1      2.70e-6      68.9      0.330      0.286      0.00689
$ src      srp      fs
$      0.1
$ $$$$ Sections
$ *SECTION_SHELL
$ sid      elform      shrf      nip      propt      qr/irid      icomp
$      2          6
$ t1      t2      t3      t4      nloc
$      2.0       2.0       2.0       2.0
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$$ Define Nodes and Elements
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *NODE
$ nid      x      y      z      tc      rc

```

*CONSTRAINED_GENERALIZED_WELD

Two Plates Connected With Butt Welds


```
1 5.000000000E+01 2.000000000E+01 0.000000000E+00
2 6.000000000E+01 2.000000000E+01 0.000000000E+00
.
.     in total, 40 nodes defined
.
39 4.000000000E+01 0.000000000E+00 0.000000000E+00
40 8.000000000E+01 0.000000000E+00 0.000000000E+00
$$$$$$$$$$    Shell Elements
$  
*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
      1        2       20      14       8      22
      2        2       14      15       9       8
.
.     in total, 24 shells defined
.
23      3       5       6      32      31
24      3       6      38      40      32
$  
*END
```

*CONSTRAINED_GENERALIZED_WELD


Two Plates Connected With Butt Welds

Results:

taurus g=d3plot
ytran 25 view
ytran -50 state 16 over view

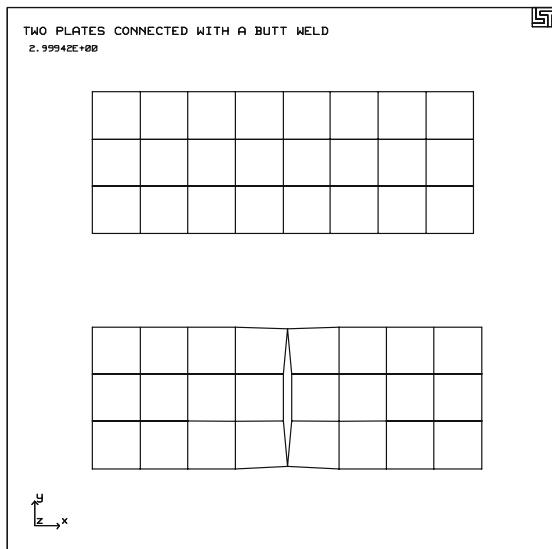

phs3
secforc
smooth 5
oset 0 16 x-for 1

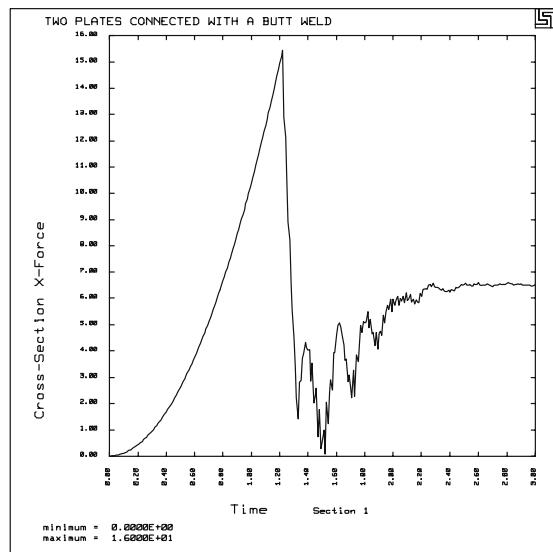

***CONSTRAINED_GENERALIZED_WELD**

Two Plates Connected With Butt Welds

*CONSTRAINED_JOINT_PLANAR

Sliding Blocks with Planar Joint

LS-DYNA Manual Section: *CONSTRAINED_JOINT_PLANAR

Additional Sections:

*LOAD_NODE_POINT
*LOAD_SEGMENT
*INITIAL_VELOCITY_NODE
*CONSTRAINED_EXTRA_NODES_SET

Example: Sliding Blocks with Planar Joint

Filename: constrained.joint_planar.k

Description:

This problem illustrates a planar joint connecting two rigid bodies.

Model:

The first block measuring $2 \times 2 \times 2$ slides along a second block measuring $2 \times 2 \times 8$. A third flexible body controls the time step size. The first block has a ramped pressure of 100 psi applied to the top surface and ramped concentrated forces applied to a lower edge of 40 lbs. The initial velocity of the first block is 400 inches/second.

Input:

One joint definition consist of nodes 128, 126, 129 and 127 (*CONSTRAINED_JOINT_PLANAR). The nodes are extra nodes attached to the rigid bodies and are coincident (*CONSTRAINED_EXTRA_NODES_SET, *SET_NODE_LIST).

Results:

The plots show that the first block correctly slides across the second block.

*CONSTRAINED_JOINT_PLANAR

Sliding Blocks with Planar Joint

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
test planar joints
$
$ LSTC Example
$
$ Last Modified: August 29, 1997
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$ - part 1: fixed, long, rigid block
$ - part 2: rigid block which slides on top of part 1
$           initial velocity = 400
$ - part 3: elastic solid used to set time step
$
$
$ Units: lbf-s^2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Control Output
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
      0.020
$
*DATABSE_BINARY_D3PLOT
$    dt/cycl      lcdt
      0.001
$
*DATABSE_GLSTAT
$    dt
      0.0001
$
*DATABSE_JNTFORC
$    dt
      0.0001
$
*DATABSE_HISTORY_NODE
$    Define nodes that output into nodout
$      id1      id2      id3      id4      id5      id6      id7      id8
      91       21       94      128      126      129      127
$
*DATABSE_NODOUT
$    dt
      0.0001
$
*DATABSE_RBDOU
$    dt
      0.0001
$
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Define Planar Joint
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
```

*CONSTRAINED_JOINT_PLANAR

Sliding Blocks with Planar Joint

```

$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*CONSTRAINED_JOINT_PLANAR
$n1      n2      n3      n4      n5      n6      rps
128      126     129     127
$*CONSTRAINED_EXTRA_NODES_SET
$pid      nsid
1         1
$*SET_NODE_LIST
$sid
1
$nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
126      127
$*CONSTRAINED_EXTRA_NODES_SET
$pid      nsid
2         2
$*SET_NODE_LIST
$sid
2
$nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
128      129
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$#### Parts and Materials
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
*$PART
fixed rigid body
$pid      sid      mid      eosid      hgid      igrav      adpopt
1         1         1
*$PART
sliding rigid body
2         2         2
*$PART
elastic body for time step control
3         3         3
$#####
$#### Materials
*$MAT_RIGID
$mid      ro       e        pr       n       couple      m       alias
1 7.850E-04 3.000E+07 3.000E-01

```

*CONSTRAINED_JOINT_PLANAR

Sliding Blocks with Planar Joint

```
$
$      cmo      con1      con2
1.000E+00 7.000E+00 7.000E+00
$      lco/a1      a2      a3      v1      v2      v3

$ *MAT_RIGID
$      mid      ro      e      pr      n      couple      m      alias
2 7.850E-04 3.000E+07 3.000E-01
$-$      cmo      con1      con2
$-$

$      lco/a1      a2      a3      v1      v2      v3

$ *MAT_ELASTIC
$      mid      ro      e      pr
3 7.850E-04 3.000E+07 3.000E-01
$-$

$$$$ Sections
$ *SECTION_SOLID
$      sid      elform
1      0
2      0
3      0
$-
$$$$ Loading
$-
$$$$ Pressure load on top of block
$-
*LOAD_SEGMENT
$-
$      lcid      sf      at      n1      n2      n3      n4
1 1.000E+00 0.000E+00      97      106      107      98
1 1.000E+00 0.000E+00      106      115      116      107
1 1.000E+00 0.000E+00      98      107      108      99
1 1.000E+00 0.000E+00      107      116      117      108
$-
*DEFINE_CURVE
$-
$      lcid      sidr      scla      sclo      offa      offo
1      0 0.000E+00 0.000E+00 0.000E+00 0.000E+00
$-
$      abscissa      ordinate
0.00000000E+00      0.00000000E+00
9.99999978E-03      1.00000000E+02
1.99999996E-02      1.00000000E+02
$-
$-
$$$$ Force load on lower edge of block
$-
*LOAD_NODE_POINT
$-
```

***CONSTRAINED_JOINT_PLANAR**
Sliding Blocks with Planar Joint

```

$      nid      dof      lcid      sf      cid      m1      m2      m3
      91       3      2-1.000E+00      0
      92       3      2-1.000E+00      0
      93       3      2-1.000E+00      0
$
*$DEFINE_CURVE
$
$      lcid      sidr      scla      sclo      offa      offo
      2          0 0.000E+00 0.000E+00 0.000E+00 0.000E+00
$
$      abscissa      ordinate
      0.00000000E+00 0.00000000E+00
      1.99999996E-02 4.00000000E+01
$$
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Initial Conditions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
*INITIAL_VELOCITY_NODE
$
$      nid      vx      vy      vz      vxe      vye      vze
$
$$$ Nodes on sliding block
$      91 4.000E+02 0.000E+00 0.000E+00
      92 4.000E+02 0.000E+00 0.000E+00
      93 4.000E+02 0.000E+00 0.000E+00
      94 4.000E+02 0.000E+00 0.000E+00
      95 4.000E+02 0.000E+00 0.000E+00
      96 4.000E+02 0.000E+00 0.000E+00
      97 4.000E+02 0.000E+00 0.000E+00
      98 4.000E+02 0.000E+00 0.000E+00
      99 4.000E+02 0.000E+00 0.000E+00
     100 4.000E+02 0.000E+00 0.000E+00
     101 4.000E+02 0.000E+00 0.000E+00
     102 4.000E+02 0.000E+00 0.000E+00
     103 4.000E+02 0.000E+00 0.000E+00
     104 4.000E+02 0.000E+00 0.000E+00
     105 4.000E+02 0.000E+00 0.000E+00
     106 4.000E+02 0.000E+00 0.000E+00
     107 4.000E+02 0.000E+00 0.000E+00
     108 4.000E+02 0.000E+00 0.000E+00
     109 4.000E+02 0.000E+00 0.000E+00
     110 4.000E+02 0.000E+00 0.000E+00
     111 4.000E+02 0.000E+00 0.000E+00
     112 4.000E+02 0.000E+00 0.000E+00
     113 4.000E+02 0.000E+00 0.000E+00
     114 4.000E+02 0.000E+00 0.000E+00
     115 4.000E+02 0.000E+00 0.000E+00
     116 4.000E+02 0.000E+00 0.000E+00
     117 4.000E+02 0.000E+00 0.000E+00
$
$$$ Extra nodes on sliding rigid block
$      128 4.000E+02 0.000E+00 0.000E+00
$      129 4.000E+02 0.000E+00 0.000E+00
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
```

*CONSTRAINED_JOINT_PLANAR

Sliding Blocks with Planar Joint


```
$$$$ Nodes and Elements
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*NODE
$ node           x           y           z       tc      rc
  1 0.000000000E+00 0.000000000E+00 0.000000000E+00 0 0
  2 1.111111164E+00 0.000000000E+00 0.000000000E+00 0 0
  3 2.222222328E+00 0.000000000E+00 0.000000000E+00 0 0
  .
  ... in total, 129 nodes defined
  .
  127 1.000000000E+01 4.000000000E+00 1.000000000E+00 0 0
  128 1.000000000E+01 0.000000000E+00 1.000000000E+00 0 0
  129 1.000000000E+01 4.000000000E+00 1.000000000E+00 0 0
$
*ELEMENT_SOLID
$*
$ eid   pid    n1    n2    n3    n4    n5    n6    n7    n8
  1     1     1     2    12    11    31    32    42    41
  2     1     2     3    13    12    32    33    43    42
  3     1     3     4    14    13    33    34    44    43
  .
  ... in total, 45 solids defined
  .
  43     2    103    104    107    106    112    113    116    115
  44     2    104    105    108    107    113    114    117    116
  45     3    118    119    121    120    122    123    125    124
$*
*END
```

*CONSTRAINED_JOINT_PLANAR


Sliding Blocks with Planar Joint

Results:

```
taurus g=d3plot  
19  
<m 3 rx -10 udg 1 state 20 over view
```

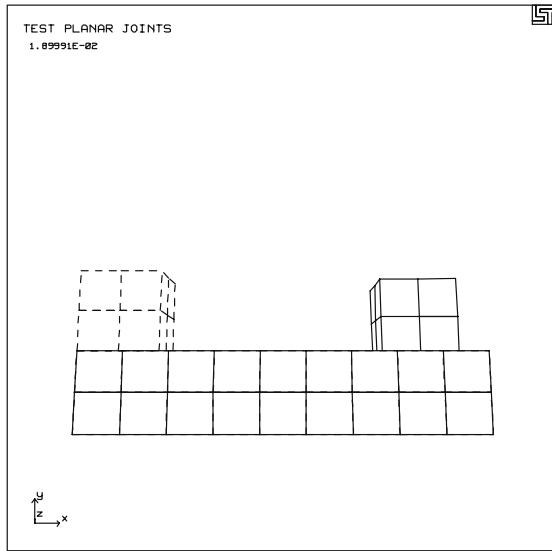

```
phs3  
jntforc  
oscl -1 y-force
```

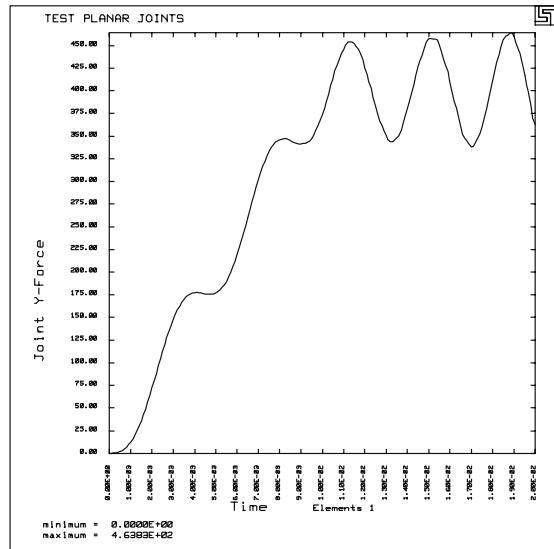

***CONSTRAINED_JOINT_PLANAR**

Sliding Blocks with Planar Joint

*CONSTRAINED_JOINT_REVOLUTE

Hinged Shell with Stop Angle (Revolute Joint)

LS-DYNA Manual Section: *CONSTRAINED_JOINT_REVOLUTE

Additional Sections:

*CONSTRAINED_JOINT_STIFFNESS
*CONTROL_TIMESTEP

Example: Hinged Shell with Stop Angle (Revolute Joint)

Filename: constrained.joint_revolute.k

Description:

Two rigid shell elements are joined together using a revolute joint. A stop angle is defined so that the rotating plate can only rotate 30 degrees relative to the other plate.

Model:

A pair of concentrated loads are applied to the end nodes of a hinge-jointed shell system using *LOAD_NODE_POINT. One of the rigid plates is fixed by using the capability within the *MAT_RIGID keyword. The rotating plate has a stop angle of 30 degrees relative to the fixed plate defined using the *CONSTRAINED_JOINT_STIFFNESS_GENERALIZED keyword.

Because all components in the model are rigid, the time step needs to be controlled by limiting the maximum time step to 4.15E-06 s. (In deformable structures, the minimum time step is usually the one of concern.)

Results:

The rotating plate at several states are shown imposed on each other. The maximum rotated angle is closer to 38 degrees rather than the specified 30 degrees. This is because the joint stiffness actually defines the angle at which the resistance force is to begin. The forces associated with stopping the rotating plate can be determined by examining the jntforc ascii file.

*CONSTRAINED_JOINT_REVOLUTE

Hinged Shell with Stop Angle (Revolute Joint)

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
hinged shell w/ stop angle
$
$ LSTC Example
$
$ Last Modified: October 16, 1997
$
$ - This problem has a pair of concentrated loads applied to
$   the end nodes of a hinge-jointed shell system.
$
$ - 30 degree stop angle (must add joint stiffness, local coord system)
$
$ - control timestep with maximum 4.15E-06
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endeng      endmas
  2.000E-02
$
*CONTROL_TIMESTEP
$    dtinit      scft       isdo       tslimt      dtms       lctm       erode      ms1st
                                5
$
*DEFINE_CURVE
$    lcid      sidr       scla       sclo       offa       offo
      5
$        abscissa          ordinate
          0.0            4.15E-06
          1.0            4.15E-06
$
*DATABSE_BINARY_D3PLOT
$    dt      lcdt
  5.000E-04
$
*DATABSE_GLSTAT
$    dt
  0.0001
$
*DATABSE_JNTFORC
$    dt
  1.000E-04
$
*DATABSE_NODOUT
$    dt
  0.0001
$
*DATABSE_HISTORY_NODE
$    nid1      nid2
      3          4
$
```

*CONSTRAINED_JOINT_REVOLUTE

Hinged Shell with Stop Angle (Revolute Joint)

```
*DATABASE_RBDOUT
$      dt
$      0.0001
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$$$$ Revolute Joint
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
*$CONSTRINED_JOINT_REVOLUTE
$  
$ Create a revolute joint between two rigid bodies. The rigid bodies must
$ share a common edge to define the joint along. This edge, however, must
$ not have the nodes merged together. Rigid bodies A and B will rotate
$ relative to each other along the axis defined by the common edge.
$  
$ Nodes 1 and 2 are on rigid body A and coincide with nodes 9 and 10
$ on rigid body B, respectively. (This defines the axis of rotation.)
$  
$ The relative penalty stiffness on the revolute joint is to be 1.0,
$ the joint is well lubricated, thus no damping at the joint is supplied.
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      n1          n2          n3          n4          n5          n6          rps        damp
$      1            9            2            10                                           1.0
$  
$  
$  
$$$$$$$$$$$$ Define a joint stiffness for the revolute joint described above.
$  
$ Attributes of the joint stiffness:
$      - Used for defining a stop angle of 30 degrees rotation
$          (i.e., the joint allows a positive rotation of 30 degrees and
$          then imparts an elastic stiffness to prevent further rotation)
$      - Define between rigid body A (part 1) and rigid body B (part 2)
$      - Define a local coordinate system along the revolute axis
$          on rigid body A - nodes 1, 2 and 3 (cid = 5). This is used to
$          define the revolute angles phi (PH), theta (T), and psi (PS).
$      - The elastic stiffness per unit radian for the stop angles
$          are 100, 10, 10 for PH, T, and PS, respectively.
$      - Values not specified are not used during the simulation.
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
*$CONSTRINED_JOINT_STIFFNESS_GENERALIZED
$      jsid      pidA      pidB      cidA      cidB
$      1          1          2          5          5
$  
$      lcidPH    lcidT    lcidPS    dlcidPH    dlcidT    dlcidPS
$  
$      esPH      fmPS      esT       fmT       esPS      fmPS
$      100.0     10.0      10.0      10.0      10.0      10.0
$  
$      nsaPH    psaPH      nsaT      psaT      nsaPS    psaPS
$      30.0      30.0      30.0      30.0      30.0      30.0
$  
$  
$  
*DEFINE_COORDINATE_NODES
$      cid      n1      n2      n3
```

*CONSTRAINED_JOINT_REVOLUTE

Hinged Shell with Stop Angle (Revolute Joint)

```
      5       1       2       3
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ Define Loading
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ .>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *LOAD_NODE_POINT
$   nid      dof      lcid      sf      cid      m1      m2      m3
$     3        3      1-1.000E+00
$     4        3      1-1.000E+00
$ *DEFINE_CURVE
$   lcid      sidr      scla      sclo      offa      offo
$     1
$     abscissa      ordinate
$     0.00000000E+00    1.00000000E+00
$     1.00000000E+00    1.00000000E+00
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ Define Parts and Materials
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ .>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *PART
$   pid      sid      mid      eosid      hgid      grav      adpopt
rotating
$     1        1        1        0
fixed
$     2        1        2        0
$ Materials
$ *MAT_RIGID
$   mid      ro      e      pr      n      couple      m      alias
$     1    7.000E-04  3.000E+07  3.000E-01
$   cmo      con1      con2
$   lco/a1      a2      a3      v1      v2      v3
$ *MAT_RIGID
$   mid      ro      e      pr      n      couple      m      alias
$     2    7.000E-04  3.000E+07  3.000E-01
$   cmo      con1      con2
$     1.0      7      7
$   lco/a1      a2      a3      v1      v2      v3
$ Sections
```

***CONSTRAINED_JOINT_REVOLUTE**
Hinged Shell with Stop Angle (Revolute Joint)

```

*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
$      1          2          3.0
$      t1        t2        t3        t4        nloc
$      0.1        0.1        0.1        0.1
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Define Nodes and Elements  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  

$  

*NODE
$      nid      x      y      z      tc      rc
$      1 0.000000000E+00 0.000000000E+00 0.000000000E+00 0 0
$      2 1.000000000E+00 0.000000000E+00 0.000000000E+00 0 0
$      3 0.000000000E+00 1.000000000E+00 0.000000000E+00 0 0
$      4 1.000000000E+00 1.000000000E+00 0.000000000E+00 0 0
$      7 0.000000000E+00-1.000000000E+00 0.000000000E+00 0 0
$      8 1.000000000E+00-1.000000000E+00 0.000000000E+00 0 0
$      9 0.000000000E+00 0.000000000E+00 0.000000000E+00 0 0
$      10 1.000000000E+00 0.000000000E+00 0.000000000E+00 0 0
$  

$$$$$$$$$$ Shell Elements  

$  

*ELEMENT_SHELL
$      eid      pid      n1      n2      n3      n4
$      1          1          1          3          4          2
$      3          2          7          9         10         8
$  


*END

```


*CONSTRAINED_JOINT_REVOLUTE Hinged Shell with Stop Angle (Revolute Joint)

Results:

taurus g=d3plot
angle 1 rz 90 rx -45 ry 30 rx -15 rz 30 ry -20 s 1 v s 3 over v
s 5 over v ...repeat for all odd states up to ... s 21 over v

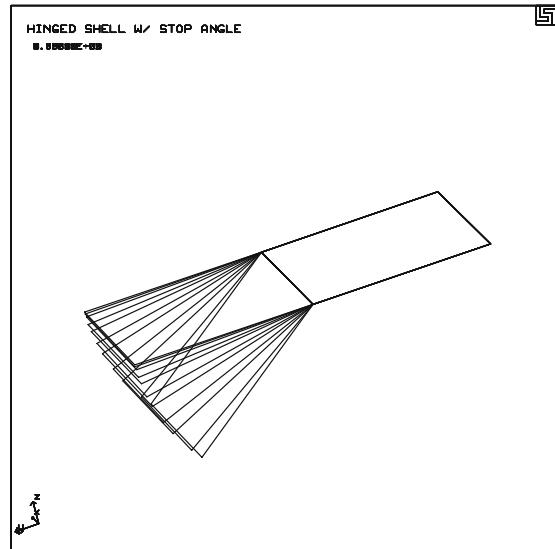

phs3
jntforc
y-force

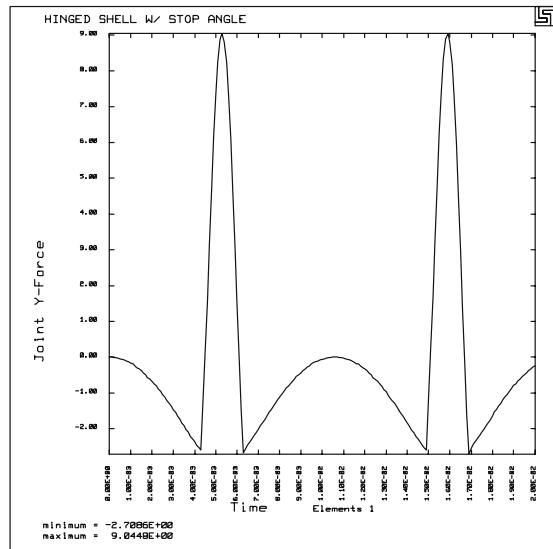

***CONSTRAINED_LINEAR**

Linearly Constrained Plate

LS-DYNA Manual Section: *CONSTRAINED_LINEAR

Additional Sections:

BOUNDARY_PRESCRIBED_MOTION_NODE
DEFINE_CURVE

Example: Linearly Constrained Plate

Filename: constrained.linear.plate.k

Description:

The center node of a plate moves in the normal direction. Two other nodes that are neighbors to the center node are constrained such that their displacement in the normal direction is identical.

Model:

The plate is made of an elastic material measuring $40 \times 40 \times 2$ mm³ and contains 64 Hughes-Liu shell elements. The center node displacement increases linearly. At the termination time, 0.0005 seconds, the displacement is 15 mm. The degree of freedom in the z-direction for the two nodes is identical.

Input:

A load curve defines the magnitude of the prescribed displacement of the center node (*BOUNDARY_PRESCRIBED_MOTION_NODE, *DEFINE_CURVE). A linear constraint card defines the coupling of the displacement in the z-direction between the two nodes (*CONSTRAINED_LINEAR). Two equal coefficients with opposite signs control the displacement.

Reference:

Schweizerhof, K. and Weimer, K.

*CONSTRAINED_LINEAR

Linearly Constrained Plate

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Linear Constraint Equations
$
$ LSTC Example
$
$ Last Modified: September 3, 1997
$
$ Units: mm, s
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
      0.0005
$
*CONTROL_CONTACT
$    slsfac      rwpnal      islchk      shlthk      penopt      thkchg      orien
      0.1          2
$
$    usrstr      usrfac      nsbcs      interm      xpenen
$
*CONTROL_HOURGLASS
$    ihq        qh
      4
$
*CONTROL_SHELL
$    wrpang      itrlist      irnxx      istupd      theory
                           1
      bwc      miter
$
$
*DATABSE_BINARY_D3PLOT
$    dt        lcdt
      0.00002
$
*DATABSE_BINARY_D3THDT
$    dt        lcdt
      0.00001
$
*DATABSE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
                           1
$
$    cmpflg      ieverp      beamip
$
$
*DATABSE_HISTORY_NODE
$    id1        id2        id3        id4        id5        id6        id7        id8
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
      40          41          42
$
*DATABSE_NODOUT
```

*CONSTRAINED_LINEAR

Linearly Constrained Plate

```

$      dt
 0.00001
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Constraints and Boundary Conditions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$ nodes 40 and 42 are constrained to have identical z-direction motion
$
*CONSTRAINED_LINEAR
$      num
 2
$
$      nid      dofx      dofy      dofz      dofrx      dofry      dofrz      coef
 40           1
 42           1          1.00          -1.00
$
$
$$$$ node 41 is displaced in the z-direction according to load curve 1
$
*BOUNDARY_PRESCRIBED_MOTION_NODE
$      nid      dof      vad      lcid      sf      vid
 41        3         2         1       1.0
$
*DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
 1
$
$      abscissa      ordinate
 0.0          0.0
 0.0005      -15.0
 0.0015      -15.1
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Define Parts and Materials
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
*PART
Impacted Material
$      pid      sid      mid      eosid      hgid      adopt
 1        1        1         0         0         0
$
$
$$$$$$ Materials
$
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
 1    2.00e-8  100000.0     0.300
$
$
$$$$$$ Sections
$
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
 1        6      0.83333     2.0       3.0
$
$      t1      t2      t3      t4      nloc

```

*CONSTRAINED_LINEAR

Linearly Constrained Plate


```
          2.0      2.0      2.0      2.0
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
$$$$ z-translational constraints are placed on several nodes  
$  
*NODE  
$    nid           x           y           z       tc       rc  
     1    0.000000E+00  0.000000E+00  0.000000E+00  3        0  
     2    5.000000E+00  0.000000E+00  0.000000E+00  3        0  
     3   1.000000E+01  0.000000E+00  0.000000E+00  3        0  
.  
...  in total, 81 nodes defined  
.  
    79   3.000000E+01  4.000000E+01  0.000000E+00  3        0  
    80   3.500000E+01  4.000000E+01  0.000000E+00  3        0  
    81   4.000000E+01  4.000000E+01  0.000000E+00  3        0  
$  
$$$$ Elements  
$  
*ELEMENT_SHELL  
$    eid     pid     n1     n2     n3     n4  
     1       1       1       2      11      10  
     2       1       2       3      12      11  
     3       1       3       4      13      12  
.  
...  in total, 64 shells defined  
.  
    62     1      69      70      79      78  
    63     1      70      71      80      79  
    64     1      71      72      81      80  
$  
*END
```

*CONSTRAINED_LINEAR


Linearly Constrained Plate

Results:

taurus g=d3plot
19
time 5e-4 rx -20 ndplt

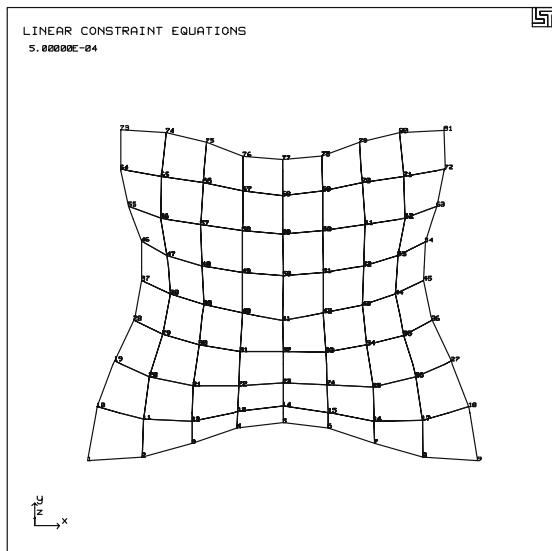

phs3
nodout
z-disp

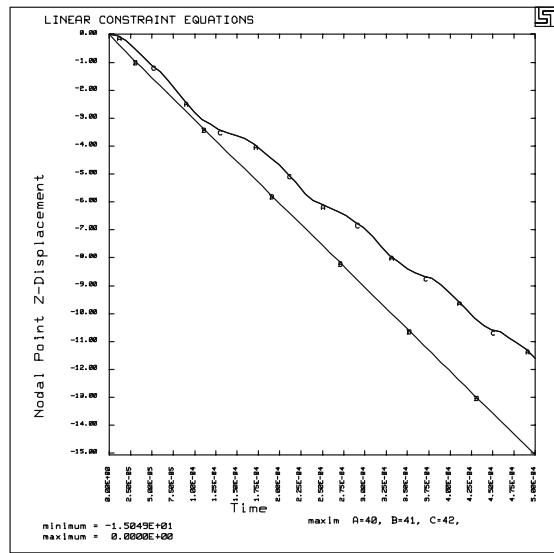

***CONSTRAINED_LINEAR**

Linearly Constrained Plate

***CONSTRAINED_SHELL_TO_SOLID**
Impulsively Loaded Cap with Shells and Solids

LS-DYNA Manual Section: *CONSTRAINED_SHELL_TO_SOLID

Additional Sections:

*LOAD_SEGMENT

Example: Impulsively Loaded Cap with Shells and Solids

Filename: constrained.shell_solid.dome.k

Description:

A dome has an impulsive pressure load. The dome contains shell and brick element joined with shell-brick interfaces.

Model:

Only 1/4 of the dome is modeled due to symmetry. The dome shells are Hughes-Liu shell elements with three integration point through the thickness. Four shell elements have a pressure load of 5,308 psi over 0.0017246 square inches. The termination time is 0.0004 seconds.

Input:

The model contains one shell-brick group that has 7 shell nodes tied to 5 brick nodes (*CONSTRAINED_SHELL_TO_SOLID). The model contains four pressure surfaces (*LOAD_SEGMENT). Five nodes are written to the time history ASCII database file nodout (*DATABASE_HISTORY_NODE, *DATABASE_NODOUT).

Results:

The plots show the response of the dome.

Reference:

T. Littlewood

*CONSTRAINED_SHELL_TO_SOLID

Impulsively Loaded Cap with Shells and Solids

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Impulsively Loaded Cap with Shell-Brick Interfaces
$
$ LSTC Example
$
$ Last Modified: September 4, 1997
$
$ Units: lbf-s^2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
      0.0004
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
      1          3
$
*DATABSE_BINARY_D3PLOT
$    dt      lcdt
      0.00001
$
*DATABSE_BINARY_D3THDT
$    dt      lcdt
      5.000E-07
$
*DATABSE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
      1
$
$    cmpflg      ieverp      beamip

$
*DATABSE_ELOUT
$    dt
      5.000E-07
$
*DATABSE_HISTORY_SHELL
$    id1      id2      id3      id4      id5      id6      id7      id8
      1
$
*DATABSE_HISTORY_SOLID
$    id1      id2      id3      id4      id5      id6      id7      id8
      1
$
*DATABSE_GLSTAT
$    dt
      5.000E-07
$
*DATABSE_NODOUT
$    dt
      5.000E-07
```

*CONSTRAINED_SHELL_TO_SOLID

Impulsively Loaded Cap with Shells and Solids

```

$*
*DATABASE_HISTORY_NODE
$    id1      id2      id3      id4      id5      id6      id7      id8
$        1       116     284     361     326
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$ Constraints
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
$$$$ Constrain shell nodes on the inner radius of the dome shells
$$$$ to the outer radius of the dome solids
$*
*CONSTRAINED_SHELL_TO_SOLID
$    nid      nsid
$        326      1
$*
*SET_NODE_LIST
$    sid      da1      da2      da3      da4
$        1
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$        116      158      200      242      284
$*
$*
*CONSTRAINED_SHELL_TO_SOLID
$    nid      nsid
$        327      2
$*
*SET_NODE_LIST
$    sid      da1      da2      da3      da4
$        2
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$        117      159      201      243      285
$*
$*
*CONSTRAINED_SHELL_TO_SOLID
$    nid      nsid
$        328      3
$*
*SET_NODE_LIST
$    sid      da1      da2      da3      da4
$        3
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$        118      160      202      244      286
$*
$*
*CONSTRAINED_SHELL_TO_SOLID
$    nid      nsid
$        329      4
$*
*SET_NODE_LIST
$    sid      da1      da2      da3      da4
$        4
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$        119      161      203      245      287
$*
$*
*CONSTRAINED_SHELL_TO_SOLID
$    nid      nsid
$        330      5

```

*CONSTRAINED_SHELL_TO_SOLID

Impulsively Loaded Cap with Shells and Solids

```
$  
*SET_NODE_LIST  
$ sid da1 da2 da3 da4  
$ 5  
$ nid1 nid2 nid3 nid4 nid5 nid6 nid7 nid8  
$ 120 162 204 246 288  
$  
$  
*CONSTRAINED_SHELL_TO_SOLID  
$ nid nsid  
$ 331 6  
$  
*SET_NODE_LIST  
$ sid da1 da2 da3 da4  
$ 6  
$ nid1 nid2 nid3 nid4 nid5 nid6 nid7 nid8  
$ 121 163 205 247 289  
$  
$  
*CONSTRAINED_SHELL_TO_SOLID  
$ nid nsid  
$ 332 7  
*SET_NODE_LIST  
$ sid da1 da2 da3 da4  
$ 7  
$ nid1 nid2 nid3 nid4 nid5 nid6 nid7 nid8  
$ 122 164 206 248 290  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Loads  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Load 4 segments with pressure at 5,308 psi for 2.0E-04 seconds  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*LOAD_SEGMENT  
$ lcid sf at n1 n2 n3 n4  
$ 1 1.000E+00 0.000E+00 1 2 4 3  
$ 1 1.000E+00 0.000E+00 2 5 7 4  
$ 1 1.000E+00 0.000E+00 3 4 8 6  
$ 1 1.000E+00 0.000E+00 4 7 9 8  
$  
*DEFINE_CURVE  
$ lcid sidr scl a o  
$ 1  
$  
$ a o  
$ 0.000E+00 5.308E+04  
$ 2.000E-04 5.308E+04  
$ 2.010E-04 0.000E+00  
$ 1.000E+00 0.000E+00  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Parts and Materials  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
```

***CONSTRAINED_SHELL_TO_SOLID**
Impulsively Loaded Cap with Shells and Solids

```

*PART
$ pid sid mid eosid hgid adpopt
Brick      1     1     1     0     0     0
Brick2     2     1     1     0     0     0
Shell      3     2     1     0     0     0
$  

$  

$$$$$$ Materials
$  

*MAT_ELASTIC
$ mid ro e pr da db
    1 2.00e-4 29.00e+6 0.330
$  

$  

$$$$$$ Sections
$  

*SECTION_SOLID
$ sid elform
    1     0
$  

*SECTION_SHELL
$ sid elform shrf nip propt qr/irid icomp
    2
$  

$ t1 t2 t3 t4 nloc
1.576E-02 1.576E-02 1.576E-02 1.576E-02
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$$$$ Define Nodes and Elements
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  

$$$$ Many nodal constraints applied in the *NODE cards - this is because
$$$$ the model has symmetry and only 1/4 of it is actually modeled.
$  

$ nid x y z tc rc
*NODE
    1 0.000000E+00 0.000000E+00 4.791520E+00 4 7
    2 2.267646E-02 0.000000E+00 4.791466E+00 2 6
    3 0.000000E+00 2.267646E-02 4.791466E+00 1 5
    .
    ... in total, 402 nodes defined
    .
    400 4.550468E-01 7.784918E-01 4.681861E+00 7 7
    401 2.396768E-01 8.693790E-01 4.681861E+00 7 7
    402 0.000000E+00 9.015844E-01 4.681861E+00 7 7
$  

$$$$ Elements - Solids
$  

*ELEMENT_SOLID
$ eid pid n1 n2 n3 n4 n5 n6 n7 n8
    1     1     1     3     4     2     24    26    27    25
    .
    2     1     3     6     8     4     26    29    31    27
    3     1     6    13    12     8     29    36    35    31
    .
    ... in total, 204 solids defined

```

***CONSTRAINED_SHELL_TO_SOLID**

Impulsively Loaded Cap with Shells and Solids


```
.          2     280     281      44      43     322     323      21      20
.          2     281     282      45      44     323     324      22      21
.          2     282     283      46      45     324     325      23      22
$  
$$$$$ Elements - Shells  
$  
*ELEMENT_SHELL  
$   eid      pid      n1      n2      n3      n4
    1       3     326     333     334     327
    2       3     327     334     335     328
    3       3     328     335     336     329
.
... in total, 60 shells defined
.
58       3     392     399     400     393
59       3     393     400     401     394
60       3     394     401     402     395
$  
*END
```

*CONSTRAINED_SHELL_TO_SOLID


Impulsively Loaded Cap with Shells and Solids

Results:

```
taurus g=d3plot  
19  
rayz rx -90 center ytran .3 v ytran -.6 s 6 over v
```

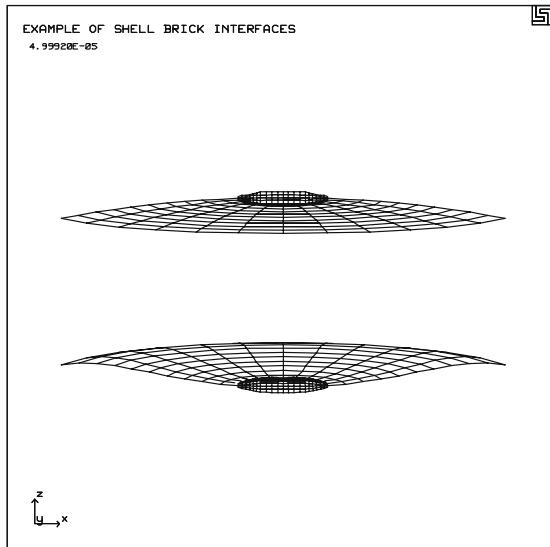

```
phs3  
nodout  
grid z-disp  
1
```

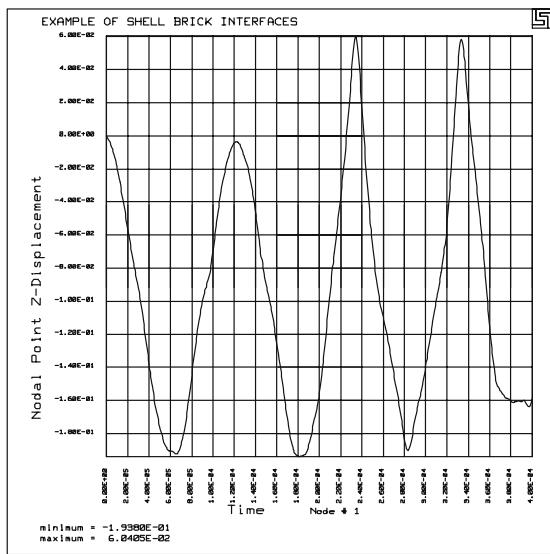

***CONSTRAINED_SHELL_TO_SOLID**
Impulsively Loaded Cap with Shells and Solids

*CONSTRAINED_SPOTWELD

Spot Weld Secures Two Plates

LS-DYNA Manual Section: *CONSTRAINED_SPOTWELD

Additional Sections:

*BOUNDARY_PRESCRIBED_MOTION_SET
*DATABASE_CROSS_SECTION_PLANE
*DATABASE_CROSS_SECTION_SET

Example: Spot Weld Secures Two Plates

Filename: constrained.spotweld.plates.k

Description:

Two overlapping plates are connected using three spotwelds. The plates are pulled apart until the spot welds reach the defined failure condition.

Model:

The two plates measure $80 \times 40 \times 1 \text{ mm}^3$ and are defined with S/R Hughes-Liu shell elements to control hourgassing. The location of the spotwelds connecting the two plates is in the center of the overlapping section. One end of the plate has fixed constraints and the other end of the other plate has linearly increasing displacement.

Input:

The nodal point cards contain the boundary conditions at one end of the plate (*NODES). *BOUNDARY_PRESCRIBED_MOTION_SET defines the nodal motion of the end of the other plate. Massless beams simulate the connection between the plates at three locations (*CONSTRAINED_SPOTWELD). The definitions include failure as a function of the axial and shear force.

The ASCII file swforc contains the axial and shear forces on the spotweld (*DATABASE_SWFORC). A cross section is defined through each of the plates using two different techniques (*DATABASE_CROSS_SECTION_PLANE, *DATABASE_CROSS_SECTION_SET). Forces and moments through the cross sections are stored in the ASCII file secforc (*DATABASE_SECFORC).

*CONSTRAINED_SPOTWELD

Spot Weld Secures Two Plates

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Two Spotwelded Plates Pulled Apart with a Specified Velocity
$
$ LSTC Example
$
$ Last Modified: September 4, 1997
$
$ Model initially changed from old lstc example to partially reflect paper
$ by Matzenmiller, et al (ls-dyna conf 9/94) - Major differences include the
$ material and element formulation, units, and velocity loading.
$
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
*CONTROL_TERMINATION
$ endtim      endcyc      dtmin      endneg      endmas
          8.00
$
*CONTROL_ENERGY
$ hgen        rwen        slnten      rylen
          2           2           2
$
*CONTROL_OUTPUT
$ npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
          1           3
$
*CONTROL_SHELL
$ wrpang      itrlist      irnxx      istupd      theory      bwc      miter
          1
$
$
*DATABASE_BINARY_D3PLOT
$ dt          lcdt
          0.2
$
*DATABASE_BINARY_D3THDT
$ dt          lcdt
          99999
$
*DATABASE_GLSTAT
$ dt
          0.010
$
*DATABASE_MATSUM
$ dt
          0.010
$
*DATABASE_NODFOR
$ dt
          0.010
$
*DATABASE_NODAL_FORCE_GROUP
$ nsid      cid
```

***CONSTRAINED_SPOTWELD**
Spot Weld Secures Two Plates

```
201
$ *SET_NODE_LIST
$     sid
201
$     nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$           213       123
$ *DATABASE_NODOUT
$     dt
0.010
$ *DATABASE_HISTORY_NODE
$     id1      id2      id3      id4      id5      id6      id7      id8
$           123       233
$ *DATABASE_SECFORC
$     dt
0.010
$ *DATABASE_SWFORC
$     dt
0.010
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Constrain the Plates Together
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Three spotwelds across the plate, with failure defined.
$ *CONSTRAINED_SPOTWELD
$     n1      n2      sn      sf      n      m
212      122      7.854    4.534    2.0      2.0
213      123      7.854    4.534    2.0      2.0
214      124      7.854    4.534    2.0      2.0
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Boundary Motion Conditions
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Prescribe the velocity of the nodes on one end of the plate.
$ *BOUNDARY_PRESCRIBED_MOTION_SET
$     nid      dof      vad      lcid      sf      vid
1          1        0         1       1.0        0
$ *DEFINE_CURVE
$     lcid      sidr      scla      sclo      offa      offo
1
$           abscissa      ordinate
0.0000          0.0
10.0000        0.3048
20.0000        0.3048
$ *SET_NODE_LIST
$     sid
1
```

*CONSTRAINED_SPOTWELD

Spot Weld Secures Two Plates

```
$      nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$      231       232       233       234       235
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Contacts  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*CONTACT_AUTOMATIC_SINGLE_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$      0
$      fs        fd        dc        vc        vdc        penchk      bt        dt
$      sfs       sfm       sst       mst       sfst       fmt        fsf       vsf
$  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Parts and Materials
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
*PART
$      pid      sid      mid      eosid      hgid      adpopt
plate_1      1        1        1
plate_2      2        1        1
$  
$  
*MAT_PLASTIC_KINEMATIC
$      mid      ro      e      pr      sigy      etan      beta
$      1      2.70e-6      68.9      0.330      0.286      0.00689
$      src      srp      fs
$  
$  
$$$$ Element formulation 6 (S/R Hughes-Liu) is used to prevent hourgassing.
$  
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
$      1        6          3
$      t1        t2        t3        t4        nloc
$      2.0      2.0      2.0      2.0
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Cross Sections
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$ Two cross sections defined - one through each plate. Two different
$     methods for defining the cross sections are used.
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
$$$ cross section through plate 1
$
```

*CONSTRAINED_SPOTWELD

Spot Weld Secures Two Plates

```

*DATABASE_CROSS_SECTION_PLANE
$ psid      xct      yct      zct      xch      ych      zch
$      0      30.0     0.0      0.0      31.0     0.0      0.0
$ xhev      yhev      xhev      lenl      lenm
$      30.0     1.0      0.0
$
$ $$$ cross section through plate 2
$ 
*DATABASE_CROSS_SECTION_SET
$ nsid      hsid      bsid      ssid      tsid      dsid
$      4          2
$
*SET_NODE_LIST
$ sid      da1      da2      da3      da4
$      4
$ nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$      226     227     228     229     230
$
*SET_SHELL_LIST
$ sid      da1      da2      da3      da4
$      2
$ eid1      eid2      eid3      eid4      eid5      eid6      eid7      eid8
$      221     222     223     224
$
$ $$$
$ $$$ Define Nodes and Elements
$ $$$
$ $$$
$ *NODE
$ node      x          y          z      tc      rc
$ 101      0.000000E+00  0.000000E+00  0.000000E+00  7      0
$ 102      0.000000E+00  1.000000E+01  0.000000E+00  7      0
$ 103      0.000000E+00  2.000000E+01  0.000000E+00  7      0
$ .
$ ... in total, 70 nodes defined
$ .
$ 233      1.200000E+02  2.000000E+01  2.000000E+00  5      0
$ 234      1.200000E+02  3.000000E+01  2.000000E+00  5      0
$ 235      1.200000E+02  4.000000E+01  2.000000E+00  5      0
$
$ $$$$$$ SHELL ELEMENTS
$ 
*ELEMENT_SHELL
$ eid      pid      n1      n2      n3      n4
$ 101      1      107     102     101     106
$ 102      1      108     103     102     107
$ 103      1      109     104     103     108
$ .
$ ... in total, 48 shells defined
$ 222      2      233     228     227     232
$ 223      2      234     229     228     233
$ 224      2      235     230     229     234
$
$ *END


```

*CONSTRAINED_SPOTWELD


Spot Weld Secures Two Plates

Results:

taurus g=d3plot
19
rx -80 state 28 view

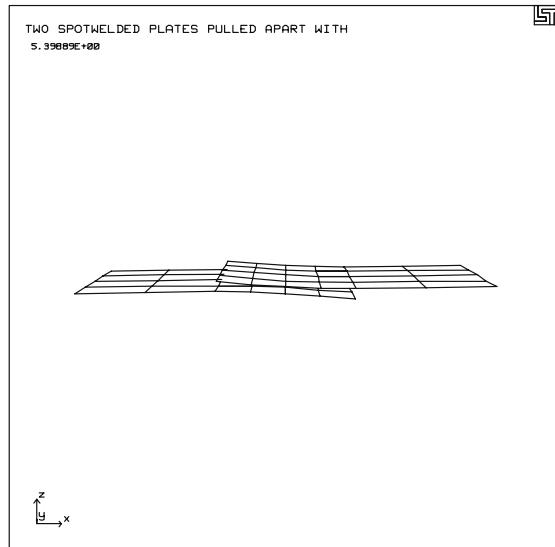

phs3
secforc
aset 0 6 r-forc

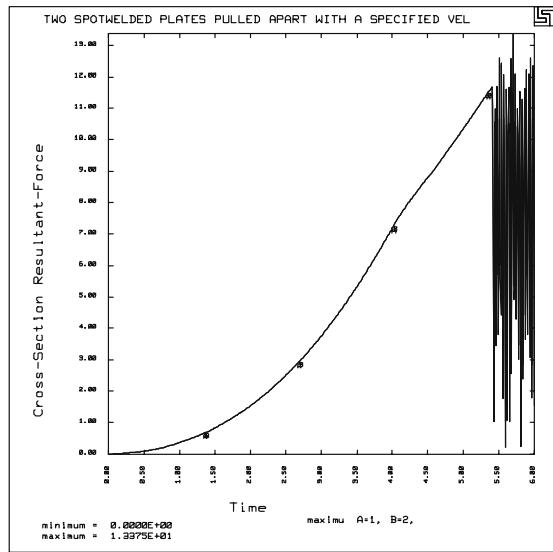

LS-DYNA Manual Section: *CONTACT**Additional Sections:**

*INITIAL_VELOCITY

Example: Shell Rebounds from Plate Using Five Contact Types

Filename: contact.plates.k

Description:

A shell element drops and rebounds on an elastic plate.

Model:

The plate measures $40 \times 40 \times 1$ mm³ and contains 16 shell elements. The dropped shell element has a side length of 10 mm, a thickness of 2 mm and drop height of 10 mm. All shell elements are elastic with Belytschko-Tsay formulation. The dropped shell element has an initial velocity of 100,000 mm/second vertically towards the plate. The calculations terminate at 0.0002 seconds.

Input:

All four nodes of the dropped shell element have an initial velocity specified by *INITIAL_VELOCITY. Contact types 3, 5 and 10 use the dropped shell element as slave side and the four shell elements in the center of the plate as master side. The example file has type 3 contact activated, while the other contact types are commented out. To change contact types, simply comment out type 3 and un-comment the desired contact.

Type 3 contact is a two way surface to surface algorithm. The segments on the slave side are checked for penetration of the master segment then the opposite search takes place.

Type 4 is a single surface algorithm. The nodes of all segments are checked for penetration of all segments.

Type 5 is a node to surface one way algorithm. The program checks that no slave node penetrates any master segment.

Type 10 converts surface to surface definition into a node to surface definition.

Type 13 is a more robust version of the single surface algorithm.

Reference:

Schweizerhof, K. and Weimer, K.

*CONTACT

Shell Rebounds from Plate Using Five Contact Types

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Sliding Interface Types 3,4,5,10,13
$
$ LSTC Example
$
$ Last Modified: September 5, 1997
$
$ Five different contacts are defined for the same problem. The only one
$ active is type 3, surface to surface. The other four are commented out.
$ To switch contact types, comment out the active one and remove the comments
$ from the desired one.
$
$ Units: mm, s
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
*CONTROL_TERMINATION
$ endtim      endcyc      dtmin      endneg      endmas
.200E-3
$
*CONTROL_ENERGY
$ hgen        rwen        slnten     rylen
2          1           2
$
*CONTROL_HOURGLASS
$ ihq         qh
4
$
*CONTROL_TIMESTEP
$ dtinit      scft        isdo       tslimt      dtms       lctm       erode      ms1st
0.50        0
$
*DATABSE_BINARY_D3PLOT
$ dt          lcdn
0.0100E-3
$
*DATABSE_BINARY_D3THDT
$ dt          lcdn
2.0000E-3
$
*DATABSE_EXTENT_BINARY
$ neiph       neips       maxint     strflg      sigflg      epsflg      rltflg      engflg
1
$ cmpflg     ieverp     beamip
$
*DATABSE_GLSTAT
$ dt
0.01e-04
$
*DATABSE_NCFORC
$ dt
0.01e-04
$
*DATABSE_NODOUT
```

*CONTACT

Shell Rebounds from Plate Using Five Contact Types

```

$      dt
  0.01e-04
$
*DATABASE_HISTORY_NODE
$      id1      id2      id3      id4      id5      id6      id7      id8
$      12       13       101
$
*DATABASE_MATSUM
$      dt
  0.10e-05
$
*DATABASE_RCFORC
$      dt
  0.01e-04
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Define Contacts
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$$$$$$$$ Type 3, surface to surface
$
*CONTACT_SURFACE_TO_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$      1         2          dc          vc          vdc          penchk      1          1
$      fs        fd         dc          vc          vdc          penchk      bt         dt
$      sfs       sfm        sst         mst         sfst        sfmt        fsf        vsf
$
*SET_SEGMENT
$      sid
$      1
$      n1      n2      n3      n4
$      101     103     104     102
$
*SET_SEGMENT
$      sid
$      2
$      n1      n2      n3      n4
$      7        8        13       12
$      8        9        14       13
$      12      13      18       17
$      13      14      19       18
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$$$$$$$$ Type 4, single surface
$          to make active, remove the $$ from the lines below
$
$$*CONTACT_SINGLE_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$$      1         0          dc          vc          vdc          penchk      1          1
$      fs        fd         dc          vc          vdc          penchk      bt         dt
$$
$      sfs       sfm        sst         mst         sfst        sfmt        fsf        vsf
$$
$$
$$*SET_SEGMENT
$      sid

```

*CONTACT

Shell Rebounds from Plate Using Five Contact Types

```
$$      1
$      n1      n2      n3      n4
$$      101     103     104     102
$$      7       8       13      12
$$      8       9       14      13
$$      12      13      18      17
$$      13      14      19      18
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$$$$$$$ Type 5, node to surface
$          to make active, remove the $$ from the lines below
$
$$*CONTACT_NODES_TO_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$$      1         2         4
$      fs        fd        dc         vc         vdc        penchk      bt        dt
$$
$      sfs       sfm       sst       mst       sfst       sfmt       fsf        vsf
$$
$$*SET_NODE_LIST
$      sid
$$      1
$      nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$$      101      103      104      102
$$
$$*SET_SEGMENT
$      sid
$$      2
$      n1      n2      n3      n4
$$      7       8       13      12
$$      8       9       14      13
$$      12      13      18      17
$$      13      14      19      18
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$$$$$$$ Type 10, surface to surface
$          to make active, remove the $$ from the lines below
$
$$*CONTACT_ONE WAY_SURFACE_TO_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$$      1         2
$      fs        fd        dc         vc         vdc        penchk      bt        dt
$$
$      sfs       sfm       sst       mst       sfst       sfmt       fsf        vsf
$$
$$*SET_SEGMENT
$      sid
$$      1
$      n1      n2      n3      n4
$$      101      103      104      102
$$
$$*SET_SEGMENT
$      sid      da1      da2      da3      da4
$$      2
$      n1      n2      n3      n4
$$      7       8       13      12
$$      8       9       14      13
$$      12      13      18      17
$$      13      14      19      18
```

*CONTACT

Shell Rebounds from Plate Using Five Contact Types

```

$ . . . >....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
$ ##### Type 13, automatic single surface
$           to make active, remove the $$ from the lines below
$ 
$ $*CONTACT_AUTOMATIC_SINGLE_SURFACE
$   ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$   0          0          dc          vc          vdc          penchk      1          1
$   fs         fd         dc          vc          vdc          penchk      bt         dt
$ 
$   sfs        sfm        sst        mst        sfst        sfmt        fsf         vsf
$ 
$ 
$ ##### Initial Conditions
$ 
$ ##### Nodes of the Impactor Material are given an initial velocity.
$ 
*INITIAL_VELOCITY
$   nsid      nsindex     boxid
$   1
$   vx         vy         vz
$   0.0        0.0        -100000.0
$ 
*SET_NODE_LIST
$   sid
$   1
$   nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$   101       102       103       104
$ 
$ ##### Define Parts and Materials
$ 
$ ##### PART
$   pid      sid      mid      eosid      hgid      adpopt
Impacted Material
$   1          1          1
Impactor Material
$   2          2          1
$ 
$ 
*MAT_ELASTIC
$   mid      ro       e        pr        da        db        k
$   1        1.00e-8  100000.0  0.300
$ 
$ 
*SECTION_SHELL
$   sid      elform    shrf      nip       propt    qr/irid      icomp
$   1          0.83333  2.0       3.0
$   t1        t2        t3       t4       nloc
$   1.0       1.0       1.0       1.0
$ 
$ 
*SECTION_SHELL
$   sid      elform    shrf      nip       propt    qr/irid      icomp

```

*CONTACT

Shell Rebounds from Plate Using Five Contact Types

```
      2          0.83333    2.0      3.0
$     t1          t2      t3      t4      nloc
      2.0        2.0      2.0      2.0
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$ Outer edge nodes of the Impacted Material are fixed in translation (tc = 7)  
$  
*NODE
$   node      x           y           z       tc       rc
  1  0.000000E+00  0.000000E+00  0.000000E+00  7  0
  2  1.000000E+01  0.000000E+00  0.000000E+00  7  0
  3  2.000000E+01  0.000000E+00  0.000000E+00  7  0
  4  3.000000E+01  0.000000E+00  0.000000E+00  7  0
  5  4.000000E+01  0.000000E+00  0.000000E+00  7  0
  6  0.000000E+00  1.000000E+01  0.000000E+00  7  0
  7  1.000000E+01  1.000000E+01  0.000000E+00  0  0
  8  2.000000E+01  1.000000E+01  0.000000E+00  0  0
  9  3.000000E+01  1.000000E+01  0.000000E+00  0  0
 10 4.000000E+01  1.000000E+01  0.000000E+00  7  0
 11 0.000000E+00  2.000000E+01  0.000000E+00  7  0
 12 1.000000E+01  2.000000E+01  0.000000E+00  0  0
 13 2.000000E+01  2.000000E+01  0.000000E+00  0  0
 14 3.000000E+01  2.000000E+01  0.000000E+00  0  0
 15 4.000000E+01  2.000000E+01  0.000000E+00  7  0
 16 0.000000E+00  3.000000E+01  0.000000E+00  7  0
 17 1.000000E+01  3.000000E+01  0.000000E+00  0  0
 18 2.000000E+01  3.000000E+01  0.000000E+00  0  0
 19 3.000000E+01  3.000000E+01  0.000000E+00  0  0
 20 4.000000E+01  3.000000E+01  0.000000E+00  7  0
 21 0.000000E+00  4.000000E+01  0.000000E+00  7  0
 22 1.000000E+01  4.000000E+01  0.000000E+00  7  0
 23 2.000000E+01  4.000000E+01  0.000000E+00  7  0
 24 3.000000E+01  4.000000E+01  0.000000E+00  7  0
 25 4.000000E+01  4.000000E+01  0.000000E+00  7  0
101 1.500000E+01  1.500000E+01  1.000000E+01  0  0
102 2.500000E+01  1.500000E+01  1.000000E+01  0  0
103 1.500000E+01  2.500000E+01  1.000000E+01  0  0
104 2.500000E+01  2.500000E+01  1.000000E+01  0  0
$  
$$$$$$$$$$ SHELL ELEMENTS  
$  
*ELEMENT_SHELL
$   eid      pid      n1      n2      n3      n4
  1       1       1       2       7       6
  2       1       2       3       8       7
  3       1       3       4       9       8
  4       1       4       5      10       9
  5       1       6       7      12      11
  6       1       7       8      13      12
  7       1       8       9      14      13
  8       1       9      10      15      14
  9       1      11      12      17      16
 10      1      12      13      18      17
 11      1      13      14      19      18
 12      1      14      15      20      19
 13      1      16      17      22      21
 14      1      17      18      23      22
 15      1      18      19      24      23
```

***CONTACT**
Shell Rebounds from Plate Using Five Contact Types

16	1	19	20	25	24
101	2	101	102	104	103
\$					


*END

*CONTACT


Shell Rebounds from Plate Using Five Contact Types

Results:

taurus g=d3plot
19
udg 1 time 1.6e-4 rx -70 view

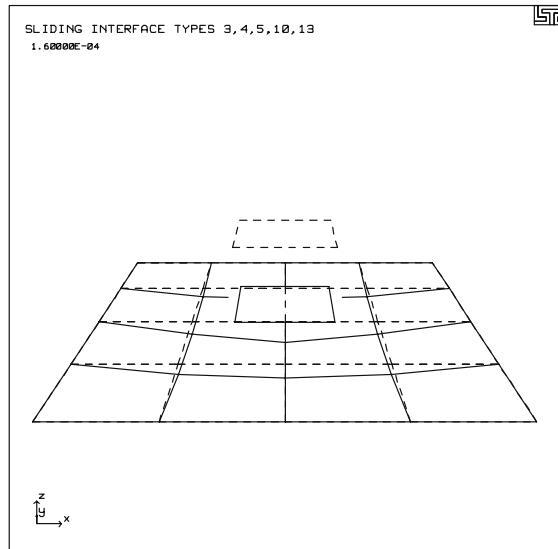

phs3
ncforc
oset -2.5e4 2.5e4 z-forc 7 8 13 101

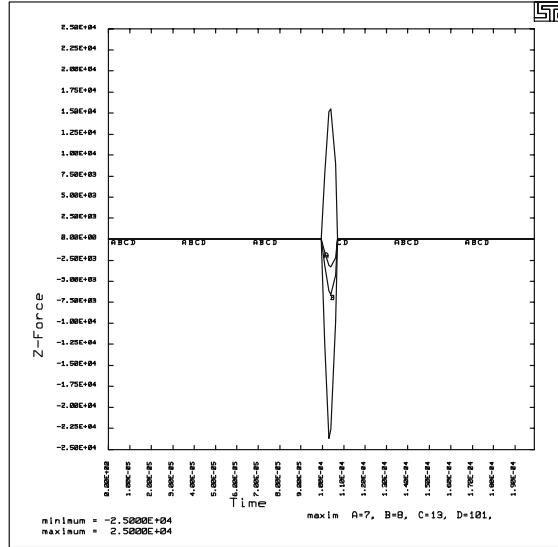

*CONTACT_ERODING_SURFACE_TO_SURFACE

Projectile Penetrates Plate

LS-DYNA Manual Section: *CONTACT_ERODING_SURFACE_TO_SURFACE

Additional Sections:

*INITIAL_VELOCITY_GENERATION

Example: Projectile Penetrates Plate

Filename: contact.projectile.k

Description:

A projectile strikes a plate at a critical angle.

Model:

The hemispherical projectile has a length of 7.67 cm and a diameter of 0.767 cm. The plate measures 23.01 cm × 23 cm × 0.64 cm. The projectile and the plate are elastic perfectly plastic with failure strain. The initial velocity of the projectile is 0.129 cm/μsec at an angle of 75 degrees. The calculation terminates at 110.0 μsec.

Input:

The initial velocity (magnitude and direction) of the projectile is set using *INITIAL_VELOCITY_GENERATION. Eroding contact between the projectile surface and plate surface is defined so that the contact erodes as the element erodes (*CONTACT_ERODING_SURFACE_TO_SURFACE). This allows the contact to work correctly as layers of the parts erode during penetration.

Results:

The projectile fractures into a tip and trailing portion. The trailing portion punches a hole through the plate while the tip deflects off the plate.

*CONTACT_ERODING_SURFACE_TO_SURFACE

Projectile Penetrates Plate

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Projectile Penetrating Plate
$
$ LSTC Example
$
$ Last Modified: September 8, 1997
$
$ Units: gram, cm, microsec, 1e+07 N, Mbar, 1e+07 N-cm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
  1.100E+02
$
*CONTROL_CONTACT
$    slsfac      rwpnal      islchk      shlthk      penopt      thkchg      orien
  1.0
$    usrstr      usrfac      nsbcs      interm      xpenen
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
  2          2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
  1          3
$
$
*DATABASE_BINARY_D3PLOT
$    dt        lcdt
  10.000000
$
*DATABASE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
$
$           ieverp = 1 put each plot state in separate d3plot files
$    cmpflg      ieverp      beamip
  1
$
*DATABASE_BINARY_D3THDT
$    dt        lcdt
  999999
$
*DATABASE_GLSTAT
$    dt
  0.10
$
*DATABASE_MATSUM
$    dt
  0.10
$
```

*CONTACT_ERODING_SURFACE_TO_SURFACE

Projectile Penetrates Plate

```
*DATABASE_RCFORC
$      dt
      0.10
$
*DATABASE_SLEOUT
$      dt
      0.10
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Contacts
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*CONTACT_ERODING_SURFACE_TO_SURFACE
$    ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
      1          2          3          3
$    fs         fd         dc         vc         vdc        penchk      bt         dt
$    sfs        sfm        sst        mst        sfst        sfmt        fsf        vsf
$    isym      erosop      iadj
      1          1
$    $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Initial Conditions
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Assign an initial velocity to the projectile (part 1) angled down
$$$$ towards the plate.
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*INITIAL_VELOCITY_GENERATION
$    sid      styp      omega      vx         vy         vz
      1          1           1.246E-01  0.000E+00-3.339E-02
$    xc       yc       zc       nx       ny       nz       phase
$    1          1
$*SET_PART
$    1
$    1
$    $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Parts and Materials
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*PART
$    pid      sid      mid      eosid      hgid      adpopt
Projectile
```

*CONTACT_ERODING_SURFACE_TO_SURFACE

Projectile Penetrates Plate

```
          1      1      1
Plate      2      1      2
$      $      $
$$$$$ Materials
$      $
$$$$ failure strain for erosion of the projectile and plate elements are
$$$$ set as: fs = 0.8
$      $
*MAT_PLASTIC_KINEMATIC
$      mid      ro      e      pr      sigy      etan      beta
$      1 1.862E+01 1.170E+00      0.22 1.790E-02
$      src      srp      fs
$      0.8
$      $
*MAT_PLASTIC_KINEMATIC
$      mid      ro      e      pr      sigy      etan      beta
$      2 7.896E+00 2.100E+00      0.284 1.000E-02
$      src      srp      fs
$      0.8
$      $
$      $
$$$$$ Sections
$      $
*SECTION_SOLID
$      sid      elform
$      1      0
$      $
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      $
$$$$ Define Nodes and Elements
$      $
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      $
*NODE
$      node      x      y      z      tc      rc
$      1 9.241751E+00 -1.534000E-05 5.137928E-02 2 6
$      2 9.193813E+00 0.000000E+00 1.344095E-01 2 6
$      3 9.145876E+00 0.000000E+00 2.174397E-01 2 6
$      .
$      ... in total, 7668 nodes defined
$      .
$      7666 1.918446E+01 4.800000E+00 0.000000E+00 7 7
$      7667 2.071067E+01 4.800000E+00 0.000000E+00 7 7
$      7668 2.300000E+01 4.800000E+00 0.000000E+00 7 7
$      $
$      $
$      Elements
$      $
*ELEMENT_SOLID
$      eid      pid      n1      n2      n3      n4      n5      n6      n7      n8
$      1      1      1      2      5      4      10     11     14     13
$      2      1      2      3      6      5      11     12     15     14
$      3      1      4      5      8      7      13     14     17     16
$      .
$      ... in total, 5664 solids defined
$      .
$      5662      2      7617      7618      7626      7625      7657      7658      7666      7665
$      5663      2      7618      7619      7627      7626      7658      7659      7667      7666
```

***CONTACT_ERODING_SURFACE_TO_SURFACE**
Projectile Penetrates Plate

5664	2	7619	7620	7628	7627	7659	7660	7668	7667
------	---	------	------	------	------	------	------	------	------

\$


*END

*CONTACT_ERODING_SURFACE_TO_SURFACE


Projectile Penetrates Plate

Results:

taurus g=d3plot
19
rx -70 dist 27 view

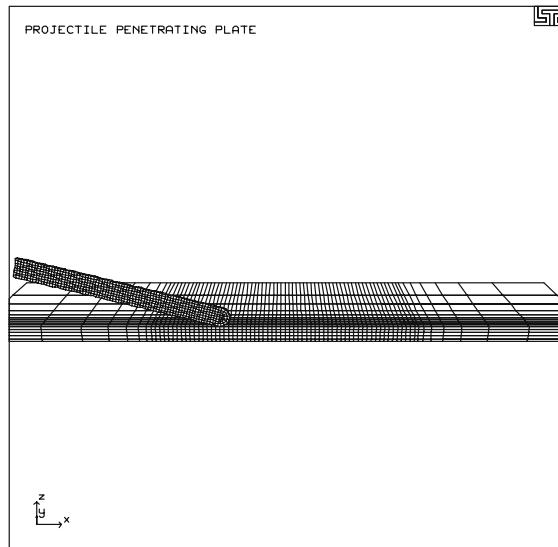

state 8
m 1 center
dam view

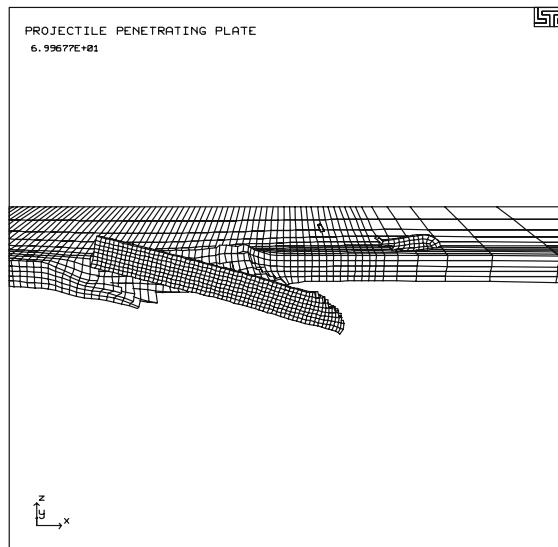

*CONTACT_NODES_TO_SURFACE

Rigid Sphere Impacts a Plate at High Speed

LS-DYNA Manual Section: *CONTACT_NODES_TO_SURFACE

Additional Sections:

*CONSTRAINED_TIED_NODES_FAILURE

Example: Rigid Sphere Impacts a Plate at High Speed

Filename: contact.n2s-sphere.k

Description:

A sphere impacts a plate at high speed causing failure of the plate. This model can be used to show how different contacts can behave differently in a rather simple model. Instructions of this are explained in the header of the input deck.

Model:

A rigid sphere is made out of solid elements and given an initial velocity of 89 mm/ms towards a plate using the *DEFINE_BOX keyword. The plate is constructed out of shell elements. The shells of the plates do NOT have their nodes merged at common locations. Instead, tied nodes with failure constraints are used to connect the common nodes. This allows the plate to rupture and rip along seam lines instead of having elements fail (and being deleted) by using the more common failure criteria within the material definition.

Results:

The plate is definitely not made out of a bullet proof material.

*CONTACT_NODES_TO_SURFACE

Rigid Sphere Impacts a Plate at High Speed

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Rigid sphere dropped onto a plate
$
$ LSTC Example
$
$ Last Modified: September 4, 1997
$
$ * Part 2 - plate
$     Shells (2.5 mm thick)
$     Mild steel (with strain rate effect)
$     Constrained on all four edges
$     Connected using Tied Nodes with Failure Constraints
$
$ * Part 3 - sphere
$     Solids
$     Rigid
$     Initial Velocity: -89 mm/ms to all nodes of the sphere
$
$ * Contact: nodes (plate - 2) to surface (sphere - 3) good <== this file
$           nodes (sphere - 3) to surface (plate - 2) bad
$
$ Note: For a really good demonstration of bad contact, remove all of the
$       *CONSTRAINED_TIED_NODES_FAILURE at the end of the deck and re-run
$       with the two contact definitions pointed out above.
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endeng      endmas
      0.60          0          0.0        0.0        0.0
$
*CONTROL_ENERGY
$    hgen        rwen      slnten      rylen
      2            2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
      1            3
$
$
*DATABASE_BINARY_D3PLOT
$    dt        lcdt
      0.1
$
*DATABASE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
$
$    cmpflg      ieverp      beamip
      1
$
```

***CONTACT_NODES_TO_SURFACE**
Rigid Sphere Impacts a Plate at High Speed

```
*DATABASE_BINARY_D3THDT
$      dt      lcdn
      999999
$
*DATABASE_GLSTAT
$      dt
      0.005
$
*DATABASE_MATSUM
$      dt
      0.005
$
*DATABASE_NODOUT
$      dt
      0.005
$
*DATABASE_HISTORY_NODE
$      id1      id2      id3      id4      id5      id6      id7      id8
      2633     362      489
$
*DATABASE_RBDOUT
$      dt
      0.005
$
*DATABASE_RCFORC
$      dt
      0.005
$
$$$$$ Initial Velocity
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
*INITIAL_VELOCITY
$
$      nsid      nsidex      boxid
      5
$
$      vx      vy      vz      wx      wy      wz
      0.0     0.0    -89.0
$
*DEFINE_BOX
$
$      boxid      xmm      xmxx      ymn      ymx      zmn      zmxx
      5     -39.0      39.0    -39.0      39.0    -25.41      51.0
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Contacts - sliding interface definitions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTACT_NODES_TO_SURFACE
$
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
      2         3         3          3
$
$      fs      fd      dc      vc      vdc      penchk      bt      dt
$
```

*CONTACT_NODES_TO_SURFACE

Rigid Sphere Impacts a Plate at High Speed

```
$      sfs      sfm      sst      mst      sfst      sfmt      fsf      vsf
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Parts and Materials  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*PART  
$  
$      pid      sid      mid      eosid      hgid      grav      adpopt
plate      2          1          1
sphere      3          2          2
$  
$  
$$$$ Materials  
$  
*MAT_PIECEWISE_LINEAR_PLASTICITY  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$      mid      ro      e      pr      sigy      etan      eppf      tdel
      1 0.783E-05    200.0    0.3    0.207
$  Cowper/Symonds Strain Rate Parameters
$      c      p      lcss      lcsr
      40        5
$  Plastic stress/strain curves
      0.000    0.080    0.160    0.400    1.000
      0.207    0.250    0.275    0.290    0.300
$  
$  
*MAT_RIGID  
$  
$      mid      ro      e      pr      n      couple      m      alias
      2 0.783E-05    200.0    0.3
$  
$      cmo      con1      con2
$  
$      lco/a1      a2      a3      v1      v2      v3
$  
$  
$$$$ Sections  
$  
*SECTION_SHELL  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$      sid      elform      shrf      nip      propt      qr/irid      icomp
      1          2          3.0
$      t1      t2      t3      t4      nloc
      2.50      2.50      2.50      2.50
$  
*SECTION_SOLID  
$  
$      sid      elform
      2
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$
```

*CONTACT_NODES_TO_SURFACE

Rigid Sphere Impacts a Plate at High Speed

```

$$$$$ Boundary and Initial Conditions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$$ Fix all the edge nodes of the plate with SPC's.
$
*BOUNDARY_SPC_NODE
$    nid      cid      dofpx      dofpy      dofz      dofrx      dofry      dofrz
    773        0          1          1          1          1          1          1
    774        0          1          1          1          1          1          1
    .
    ...   in total, 236 SPC's defined
    .
    4371        0          1          1          1          1          1          1
    4372        0          1          1          1          1          1          1
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Define Nodes and Elements
$

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*NODE
$    nid          x          y          z      tc      rc
    1 -2.19971620E+01 -2.19971620E+01 -9.29716200E+00      0      0
    2 -2.41208560E+01 -2.41208560E+01 -4.26999400E+00      0      0
    .
    ...   in total, 4372 nodes defined
    .
    4371 7.619873000E+01 -7.619873000E+01 -2.54254000E+01      0      0
    4372 7.619873000E+01 -7.11212700E+01 -2.54254000E+01      0      0
$
$$$$$ Elements - Solids
$
*ELEMENT_SOLID
$    eid      pid      n1      n2      n3      n4      n5      n6      n7      n8
    1        3        1      46      51       6       2      47      52       7
    2        3        6      51      56      11       7      52      57      12
    .
    ...   in total, 384 solids defined
    .
    383        3      748      769      772      751      557      558      560      559
    384        3      751      772      674      671      559      560      562      561
$
$$$$$ Elements - Shells
$
*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
    1        2      773      774      775      776
    2        2      777      778      779      780
    .
    ...   in total, 900 shells defined
    .
    899        2      4365      4366      4367      4368
    900        2      4369      4370      4371      4372
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$

```

*CONTACT_NODES_TO_SURFACE

Rigid Sphere Impacts a Plate at High Speed


```
$  
$$$$ Define Tied Nodes with Failure Constraints  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
$$$$ Tie all the adjacent corners of the shells together. Essentially, do  
$$$$ a merge by way of tied nodes with failure.  
$  
*CONSTRAINED_TIED_NODES_FAILURE  
$ nsid      eppf  
    101      0.0850  
$  
*SET_NODE_LIST  
$ sid  
    101  
    775      778      896      897  
$  
.     in total, 841 CONSTRAINED_TIED_NODES_FAILURE/SET_NODE_LIST pairs defined  
.     .  
$  
*CONSTRAINED_TIED_NODES_FAILURE  
$ nsid      eppf  
    941      0.0850  
*SET_NODE_LIST  
$ sid  
    941  
    4247      4250      4368      4369  
*END
```

*CONTACT_NODES_TO_SURFACE


Rigid Sphere Impacts a Plate at High Speed

Results:

taurus g=d3plot
state 7 center
rx -75 view

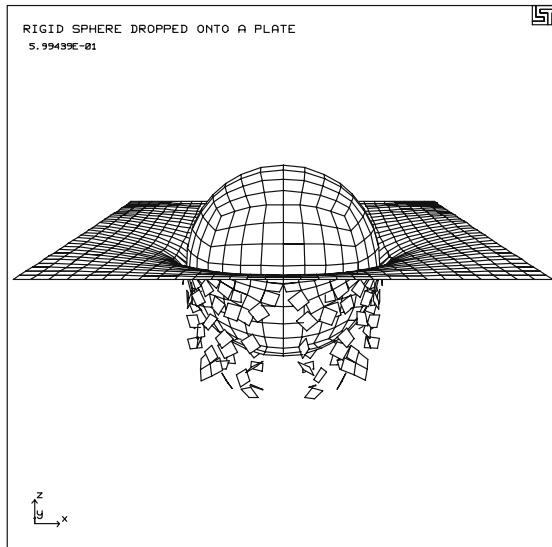

phs3
rcforc
result

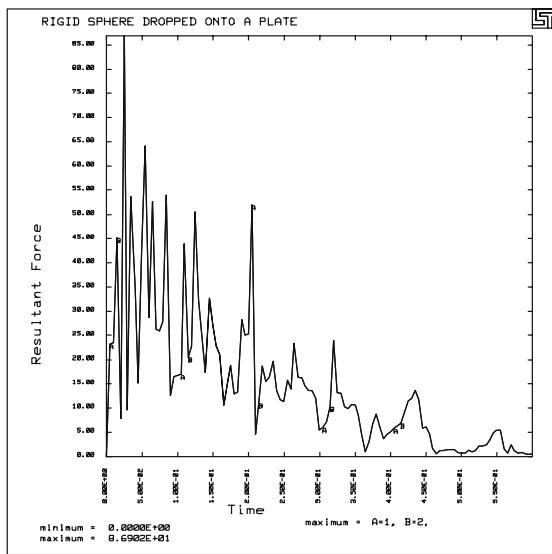

***CONTACT_NODES_TO_SURFACE**
Rigid Sphere Impacts a Plate at High Speed

***CONTACT_SINGLE_EDGE**

Corrugated Sheet Contacts Edges

LS-DYNA Manual Section: *CONTACT_SINGLE_EDGE

Additional Sections:

*CONTACT_FORCE_TRANSDUCER_PENALTY

Example: Corrugated Sheet Contacts Edges

Filename: contact.edge.k

Description:

A corrugated plate strikes a flat plate from opposite directions.

Input:

The model consists of 135 elastic plastic Belytschko-Tsay shell elements. The interaction of the two structures is to edge contact (*CONTACT_SINGLE_EDGE). A contact force transducer is defined to monitor the forces of the contact in the ascii file rcfrc. The nodes on the upper corrugated plate have an initial velocity of 10 meters/second.

Results:

A contour plot of the effective-stress and a plot of the forces from the ascii file rcfrc illustrate that the plates are in contact.

Reference:

Stillman, D. W.

***CONTACT_SINGLE_EDGE**

Corrugated Sheet Contacts Edges

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Edge to Edge Contact with Force Transducer
$
$ LSTC Example
$
$ Last Modified: September 9, 1997
$
$ Units: kg, m, s, N, Pa, Joule
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
        0.050
$
*CONTROL_HOURGLASS
$    ihq          qh
        4
$
*DATABASE_BINARY_D3PLOT
$    dt          lcdn
        0.001
$
*DATABASE_BINARY_D3THDT
$    dt          lcdn
        9.990E+02
$
*DATABASE_GLSTAT
$    dt
        0.001
$
*DATABASE_MATSUM
$    dt
        0.001
$
*DATABASE_RCFORC
$    dt
        0.001
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Define Contacts
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$$$$$$$$$ Type 22, single edge contact
$
*CONTACT_SINGLE_EDGE
$    ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
        1          0          0
$    fs        fd        dc        vc        vdc        penchk      bt        dt
```

***CONTACT_SINGLE_EDGE**
Corrugated Sheet Contacts Edges

\$	sfs	sfm	sst	mst	sfst	sfmt	ssf	vsf
\$								
*SET_SEGMENT								
\$	sid							
	1							
\$	n1	n2	n3	n4				
	1	2	0	0				
	2	3	0	0				
	3	13	0	0				
	13	14	0	0				
	14	21	0	0				
	21	22	0	0				
	22	29	0	0				
	29	30	0	0				
	30	37	0	0				
	37	38	0	0				
	38	45	0	0				
	45	46	0	0				
	46	53	0	0				
	53	54	0	0				
	54	61	0	0				
	61	62	0	0				
	69	70	0	0				
	70	71	0	0				
	71	72	0	0				
	72	73	0	0				
	73	74	0	0				
	74	75	0	0				
	75	76	0	0				
	76	77	0	0				
	77	78	0	0				
	78	79	0	0				
	79	80	0	0				
	80	81	0	0				
	81	82	0	0				
	111	112	0	0				
	112	113	0	0				
	113	114	0	0				
	114	115	0	0				
	115	116	0	0				
	116	117	0	0				
	117	118	0	0				
	118	119	0	0				
	119	120	0	0				
	120	121	0	0				
	121	122	0	0				
	122	123	0	0				
	123	124	0	0				
	125	126	0	0				
	126	127	0	0				
	127	137	0	0				
	137	138	0	0				
	138	145	0	0				
	145	146	0	0				
	146	153	0	0				
	153	154	0	0				
	154	161	0	0				
	161	162	0	0				
	162	169	0	0				
	169	170	0	0				
	170	177	0	0				
	177	178	0	0				

*CONTACT_SINGLE_EDGE

Corrugated Sheet Contacts Edges

```
    178      185      0      0
    185      186      0      0
$  
$  
$$$$ Force transducer defined to calculate contact forces on part 1.  
$  
*CONTACT_FORCE_TRANSDUCER_PENALTY  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$      ssid      msid      sstyp      mstyp
      5          2
$  
$  
*SET_PART_LIST  
  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
  5
  1
$  
$  
$$$$ Initial Conditions  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Nodes of the part 1 (node set id = 2) are given an initial velocity  
$$$$ in the y-direction of 10 m/s.  
$  
*INITIAL_VELOCITY  
$      nsid      nsidex      boxid
      2
$      vx        vy        vz        vxr       vyr       vzy
      0.0      10.0      0.0      0.0      0.0      0.0
$  
*SET_NODE_LIST  
$      sid
      2
$      nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
      1        2        3        4        5        6        7        8
      9        10       11       12       13       14       15       16
     17       18       19       20       21       22       23       24
     25       26       27       28       29       30       31       32
     33       34       35       36       37       38       39       40
     41       42       43       44       45       46       47       48
     49       50       51       52       53       54       55       56
     57       58       59       60       61       62       63       64
     65       66       67       68
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Parts and Materials  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*PART  
$      pid      sid      mid      eosid      hgid      adpopt
plate-1      1        1        1
plate-2      2        1        1
plate-3
```

***CONTACT_SINGLE_EDGE**
Corrugated Sheet Contacts Edges

```

3      1      1
$  

$  

*MAT_PLASTIC_KINEMATIC
$    mid      ro      e      pr      sigy      etan      beta
      1  7.85e+3 200.0e+09      0.300  2.0e+09
$    src      srp      fs
      0.0      0.0      0.0
$  

$  

*SECTION_SHELL
$    sid      elform      shrf      nip      propt      qr/irid      icomp
      1
$    t1      t2      t3      t4      nloc
  2.000E-03 2.000E-03 2.000E-03 2.000E-03
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Define Nodes and Elements
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

*NODE
$    node      x      y      z      tc      rc
      1  0.000000E+00  -1.000000E-01  1.500000E+00  0      0
      2  1.250000E+00  -1.000000E-01  1.500000E+00  0      0
      3  2.500000E+00  -1.000000E-01  1.500000E+00  0      0
      .
      ... in total, 192 nodes defined
      .
      190  2.000000E+01   6.766667E+00  -1.500000E+00  0      0
      191  1.875000E+01   8.100000E+00   5.000000E-01  0      0
      192  2.000000E+01   8.100000E+00  -1.500000E+00  0      0
$  

$$$$$$$$ SHELL ELEMENTS
$  

*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
      1      1      1      4      5      2
      2      1      2      5      6      3
      3      1      4      7      8      5
      .
      ... in total, 135 shells defined
      .
      133      3      187      189      190      188
      134      3      182      184      191      189
      135      3      189      191      192      190
$  

*END


```

*CONTACT_SINGLE_EDGE


Corrugated Sheet Contacts Edges

Results:

taurus g=d3plot
19
rx -40 rz 20 s 28 mono numc 12 contour 9

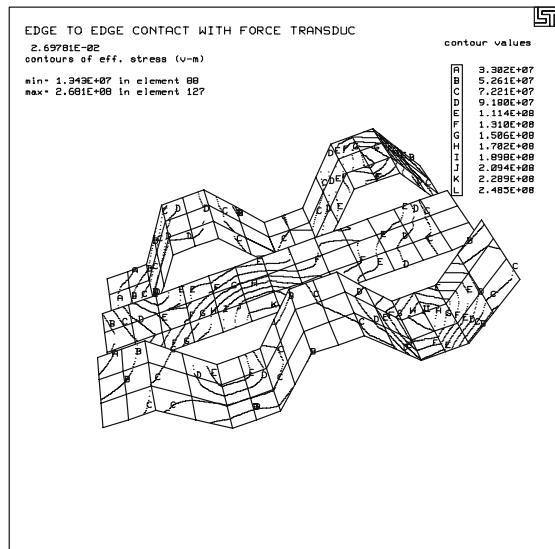

phs3
rcforc
resultant

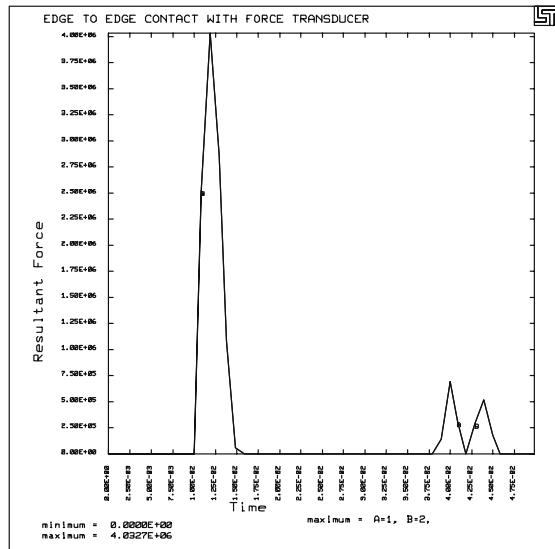

***CONTACT_TIED_NODES_TO_SURFACE**

Discrete Nodes Tied to a Surface

LS-DYNA Manual Section: *CONTACT_TIED_NODES_TO_SURFACE

Example: Discrete Nodes Tied to a Surface

Filename: contact.tied_nodes.box.k

Description:

A shell element drops onto and then rebounds from, a hollow box that is tied to an elastic plate.

Model:

The plate measures $40 \times 40 \times 1$ mm³ and contains 16 Belytschko-Tsay shell elements. The dropped shell element has a side length of 10 mm, a thickness of 2 mm and a drop height of 10 mm. The box contains 12 Belytschko-Tsay shell elements. All shell element materials are elastic. The initial velocity of the shell elements is 100,000 mm/second. The calculation terminates at 0.002 seconds.

Input:

The nodes of the dropped shell are given an initial velocity (*INITIAL_VELOCITY). The nodes on the bottom of the box, those facing the plate, are tied to the plate (*CONTACT_TIED_NODES_TO_SURFACE). Automatic single surface contact is used to define the contact between the dropped shell and the box.

Reference:

Schweizerhof, K. and Weimer, K.

*CONTACT_TIED_NODES_TO_SURFACE

Discrete Nodes Tied to a Surface

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Sliding Interface Type 6
$
$ LSTC Example
$
$ Last Modified: September 5, 1997
$
$ A box is tied to a bottom plate with tied nodes to surface contact.
$ This box is impacted by a shell element, which has an initial velocity.
$
$ Units: mm, s
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
*CONTROL_TERMINATION
$ endtim    endcyc      dtmin      endneg      endmas
 0.200E-03
$
*CONTROL_HOURGLASS
$ ihq        qh
 4
$
$
*DATABASE_BINARY_D3PLOT
$ dt         lcdn
 0.010E-03
$
*DATABASE_BINARY_D3THDT
$ dt         lcdn
 .0005E-03
$
$
*DATABASE_NODOUT
$ dt
 .0010E-03
$
*DATABASE_HISTORY_NODE
$ id1        id2        id3        id4        id5        id6        id7        id8
 101         13         213
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$$$$$$$$ Define Contacts
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTACT_AUTOMATIC_SINGLE_SURFACE
$ ssid        msid        sstyp        mstyp        sboxid        mboxid        spr        mpr
 0
$ fs          fd          dc          vc          vdc          penchk        bt          dt
$ sfs         sfm         sst         mst         sfst         sfmt         fsf         vsf
```

*CONTACT_TIED_NODES_TO_SURFACE

Discrete Nodes Tied to a Surface

```

$  

$  

$$$$$$$$$ The nodes on the bottom of the box (part 2) are tied to  

$$$$$$$ the bottom plate (part 1).  

$  

*CONTACT_TIED_NODES_TO_SURFACE  

$ ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr  

        2          1          4          3  

$         fs        fd        dc        vc        vdc       penchk       bt        dt  

$         sfs       sfm       sst       mst       sfst       sfmt       fsf       vsf  

$  

*SET_NODE_LIST  

$ sid      da1      da2      da3      da4  

    2  

$ nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8  

201      202      203      204      206      207      208      209  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Initial Conditions  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Nodes of the dropped shell are given an initial velocity.  

$  

*INITIAL_VELOCITY  

$ nsid      nsindex      boxid  

    3  

$ vx        vy        vz  

0.0      0.0     -100000.0      0.0      0.0      0.0  

$  

*SET_NODE_LIST  

$ sid      3  

$ nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8  

101      102      103      104  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Define Parts and Materials  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  

$  

*PART  

$ pid      sid      mid      eosid      hgid      adpopt  

bottom plate      1          1          1  

dropped shell      2          2          1  

box      3          1          1  

$  

$  

*MAT_ELASTIC  

$ mid      ro      e      pr      da      db      k  

1 1.00e-08 100000. 0.300
$
```

*CONTACT_TIED_NODES_TO_SURFACE

Discrete Nodes Tied to a Surface


```
$
*SECTION_SHELL
$    sid      elform      shrf      nip      propt      qr/irid      icomp
$        1          0.83333      2
$    t1      t2      t3      t4      nloc
$        1.0      1.0      1.0      1.0
$ 
$*SECTION_SHELL
$    sid      elform      shrf      nip      propt      qr/irid      icomp
$        2          0.83333      2
$    t1      t2      t3      t4      nloc
$        2.0      2.0      2.0      2.0
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$$ Define Nodes and Elements
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$$ Outer edge nodes of the bottom plate (part 1)
$$$$ are fixed in translation (tc = 7)
$ 
*NODE
$    node      x      y      z      tc      rc
$        1      0.000000E+00      0.000000E+00      0.000000E+00      7      0
$        2      1.000000E+01      0.000000E+00      0.000000E+00      7      0
$        3      2.000000E+01      0.000000E+00      0.000000E+00      7      0
$ 
$       . . . in total, 48 nodes defined
$ 
$       .
$       217      5.867900E+00      2.000000E+01      4.000000E+00      0      0
$       218      1.292890E+01      2.707110E+01      4.000000E+00      0      0
$       219      2.000000E+01      3.414210E+01      4.000000E+00      0      0
$ 
$$$$$$$$$ SHELL ELEMENTS
$ 
*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
$        1          1          1          2          7          6
$        2          1          2          3          8          7
$        3          1          3          4          9          8
$ 
$       . . . in total, 29 shells defined
$ 
$       .
$       210      3          212      213      216      215
$       211      3          214      215      218      217
$       212      3          215      216      219      218
$ 
$*END
```

*CONTACT_TIED_NODES_TO_SURFACE


Discrete Nodes Tied to a Surface

Results:

taurus g=d3plot
19
udg 1 time 1.6e-4 rx -70 view

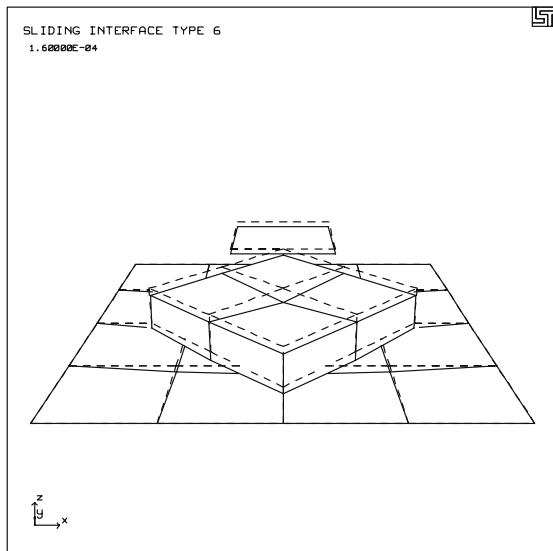

phs3
nodout
grid z-disp

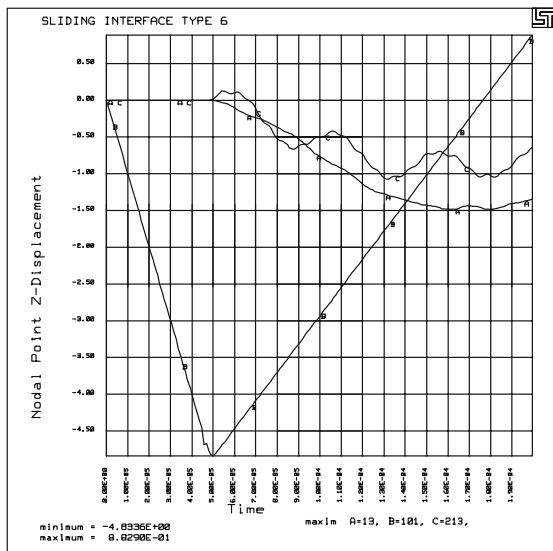

***CONTACT_TIED_NODES_TO_SURFACE**

Discrete Nodes Tied to a Surface

LS-DYNA Manual Section: *CONTACT_ENTITY

Additional Sections:

*BOUNDARY_PRESCRIBED_MOTION_RIGID

Example: Rigid Sphere Impacts Plate

Filename: contact_entity.sphere.k

Description:

A rigid sphere drops onto an elastic plate. The sphere contains shell elements automatically generated with a “Geometric Contact Entity” spherical surface.

Model:

The plate of elastic material measures $40 \times 40 \times 2$ mm³ and contains 64 Belytschko-Tsay shell elements. The sphere has a radius of 6.0 mm and the distance from the center of the cube to the plate is 8.5 mm. The inertia properties of the sphere are defined by the properties of the rigid brick element. A geometric contact entity defines the spherical contact surface. The sphere moves toward the plate with a uniform motion. The termination time is 0.0005 seconds.

Input:

The Geometric Contact Entity defines the outer master surface on the rigid sphere (*CONTACT_ENTITY). The nodes on the plate are slave nodes (*SET_NODE_LIST), and are in the “Geometric Entity”. A load curve definition defines the movement of the sphere (*BOUNDARY_PRESCRIBED_MOTION_RIGID, *DEFINE_CURVE). The displacement condition for rigid bodies is input by part number, not by listing the nodes included in the definition.

Reference:

Schweizerhof, K. and Weimer, K.

*CONTACT_ENTITY

Rigid Sphere Impacts Plate

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Geometric Contact Entity
$ 
$ LSTC Example
$ 
$ * Part 1 - plate
$     Shells (2.0 mm thick)
$     elastic material
$     translational constraints on all four edges (z-dir only)
$ 
$ * Part 2 - sphere - Contact Entity
$     Defined as shells and rigid material but really there are no part 2
$     elements defined explicitly. The contact entity is really part 2.
$     center (x,y,z) = (20,20,9)
$     radius = 6 mm
$ 
$ 
$ =====> Due to the course mesh of the plate, there is considerable amount
$         of penetration of the sphere into the plate.
$ 
$ Last Modified: April 10, 1997
$ 
$ Units: mm, ton, s, N, MPa, N-mm
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$$ Control/Ouput
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*CONTROL_TERMINATION
$     endtim      endcyc      dtmin      endneg      endmas
.5000E-3
$ 
*CONTROL_TIMESTEP
$     dtinit      scft       isdo       tslimt      dtms       lctm       erode      ms1st
          0.1
$ 
*CONTROL_HOURGLASS
$     ihq        qh
        4
$ 
$ 
*DATABASE_BINARY_D3PLOT
$     dt/cycl      lcdt
0.0200E-3
$ 
*DATABASE_RBDOUT
$     dt/cycl      lcdt
0.005e-3
$ 
*DATABASE_GCEOUT
$     dt/cycl      lcdt
0.005e-3
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
```

*CONTACT_ENTITY

Rigid Sphere Impacts Plate

```

$$$$$ Contact Entity
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$>$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
*CONTACT_ENTITY
$    pid      geotyp      sid      styp      sf      df      cf      intord
$        2          2          1          0      1.0
$    bt        dt        so
$    xc        yc        zc      ax      ay      az
$    0.00     0.00     .00     1.00    0.00    0.00
$    bx        by        bz
$    0.00     1.00     0.00
$    inout      g1      g2      g3      g4      g5      g6      g7
$    0     20.00    20.00    9.00    6.00
$*
$*
*SET_NODE_LIST
$    sid      da1      da2      da3      da4
$    1
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$    1       2       3       4       5       6       7       8
$    9       10      11      12      13      14      15      16
$   17      18      19      20      21      22      23      24
$   25      26      27      28      29      30      31      32
$   33      34      35      36      37      38      39      40
$   41      42      43      44      45      46      47      48
$   49      50      51      52      53      54      55      56
$   57      58      59      60      61      62      63      64
$   65      66      67      68      69      70      71      72
$   73      74      75      76      77      78      79      80
$   81
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$$ Define Parts and Materials
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$>$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
$$$ Part      1      shell: plate - elastic material
$$
$$$ Part      2      solid: sphere - rigid material ==> contact entity
$*
*PART
plate
$    pid      sid      mid      eosid      hgid      adpopt
$        1          1          1          0          0          0
$*
*PART
sphere
$    pid      sid      mid      eosid      hgid      adpopt
$        2          2          2          0          0          0
$*
$*

```

*CONTACT_ENTITY

Rigid Sphere Impacts Plate

***CONTACT_ENTITY**
Rigid Sphere Impacts Plate

```
3    1.000000E+01    0.000000E+00    0.000000E+00    3    0
.
...  in total, 81 nodes defined
.
79    3.000000E+01    4.000000E+01    0.000000E+00    3    0
80    3.500000E+01    4.000000E+01    0.000000E+00    3    0
81    4.000000E+01    4.000000E+01    0.000000E+00    3    0
$  
$$$$$ Elements  
$  
*ELEMENT_SHELL  
$    eid      pid      n1      n2      n3      n4
    1        1        1        2       11       10
    2        1        2        3       12       11
    3        1        3        4       13       12
.
...  in total, 64 shells defined
.
62        1        69        70        79       78
63        1        70        71        80       79
64        1        71        72        81       80
$  
*END
```

*CONTACT_ENTITY


Rigid Sphere Impacts Plate

Results:

taurus g=d3plot
19
rx -60 ry 10 ytrans 5 s 19 view



phs3
rbdout
oset -15 0 z-disp

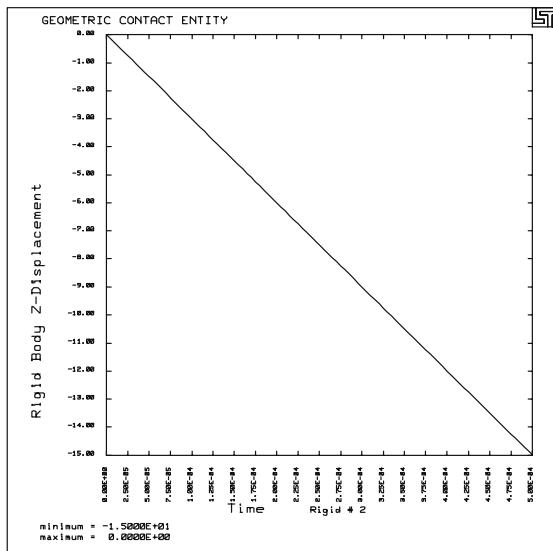

*CONTROL_CONTACT

Hemispherical Punch

LS-DYNA Manual Section: *CONTROL_CONTACT

Additional Sections:

*LOAD_SEGMENT
*MAT_POWER_LAW_PLASTICITY
*RIGIDWALL_PLANAR

Example: Hemispherical Punch

Filename: control_contact.hemi-draw.k

Description:

This problem includes three tools a punch, a pressure pad, a die and a workpiece. A workpiece is deep drawn by the hemispherical punch while the pressure pad and die prevents wrinkling. The load on the pressure pad is ramped, then the punch displaces in the y direction.

Model:

The workpiece measures 80 mm in radius and 1 mm in thickness. The punch radius is 50.0 mm and the die torus radius is 6.35 mm. The workpiece contains 528 Belytschko Tsay shell elements with 5 integration points through the thickness. The tools are rigid members. Only 1/4 of the system is modeled because of symmetry.

Input:

The number of integration points is 5 for the workpiece. (*SECTION_SHELL) This model contains two options to consider shell thickness. The first option is the contact surfaces are projected to the true surface of shell (*CONTROL_CONTACT). The second option is membrane straining results in thickness changes (*CONTROL_CONTACT). The motion of the punch follows a sine function represented by load curve number 2 (Section 22).

Reference:

Honecker, A. and Mattiason, K.

*CONTROL_CONTACT

Hemispherical Punch

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Hemispherical Deep Draw
$
$ LSTC Example
$
$ Last Modified: September 10, 1997
$
$ Units: kg, mm, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
       6.0
$
$$$$ shell thickness is considered during contact: shlthk = 1
$
*CONTROL_CONTACT
$    slsfac      rwpnal      islchk      shlthk      penopt      thkchg      orien
       1.0                  1
$    usrstr      usrfac      nsbcs      interm      xopenen

$
*CONTROL_ENERGY
$    hgen        rwen        slnten      rylen
       2          2          2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
       1          3          0          0                  2          1000
$
$$$$ membrane straining causes thickness change: istupd = 1
$
*CONTROL_SHELL
$    wrpang      itrnst      irnxx      istupd      theory      bwc      miter
       1
$
$
*DATABSE_BINARY_D3PLOT
$    dt        lcdn
       0.20
$
*DATABSE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
       1
$    cmpflg      ieverp      beamip
       1
$
*DATABSE_BINARY_D3THDT
$    dt        lcdn
       12.00E+00
$
*DATABSE_GLSTAT
```

*CONTROL_CONTACT Hemispherical Punch

```

$      dt
      0.05
$
*DATABASE_MATSUM
$      dt
      0.05
$
*DATABASE_NODOUT
$      dt
      0.05
$
*DATABASE_HISTORY_NODE
$      id1      id2      id3      id4      id5      id6      id7      id8
      1333
$
*DATABASE_RCFORC
$      dt
      0.05
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Contacts
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
$$$$$$$$$$$ contact between workpiece and punch
$
*CONTACT_SURFACE_TO_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
      1          2          3          3
$      fs         fd         dc         vc         vdc        penchk       bt        dt
      0.15      0.15
$      sfs        sfm        sst        mst        sfst       sfmt        fsf       vsf
$
$$$$$$$$$$$ contact between workpiece and holder
$
*CONTACT_SURFACE_TO_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
      1          3          3          3
$      fs         fd         dc         vc         vdc        penchk       bt        dt
      0.15      0.15
$      sfs        sfm        sst        mst        sfst       sfmt        fsf       vsf
$
$$$$$$$$$$$ contact between workpiece and die
$
*CONTACT_SURFACE_TO_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
      1          4          3          3
$      fs         fd         dc         vc         vdc        penchk       bt        dt
      0.15      0.15
$      sfs        sfm        sst        mst        sfst       sfmt        fsf       vsf
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Parts and Materials
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$

```

*CONTROL_CONTACT

Hemispherical Punch

```
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
*PART
$    pid      sid      mid      eosid      hgid      adpopt
Workpiece
        1          1          1
Punch
        2          1          2
Holder (pressure pad)
        3          1          2
Die
        4          1          2
$*
$*
*MAT_POWER_LAW_PLASTICITY

$    mid      ro      e      pr      k      n      src      srp
        1  7.83e-06    69.0    0.300   0.598   0.216   0.0      0.0
$*
*MAT_RIGID
$    mid      ro      e      pr      n      couple      m      alias
        2  7.83e-06    69.0    0.300
$    cmo      con1      con2
$    lco/a1      a2      a3      v1      v2      3
$*
$$$$$ All parts use this section, thus all shells have 1 mm thicknesses.
$$$$$ Those parts that aren't rigid, use B-T shell formulation with
$$$$$ five through the thickness integration points.
$*
*SECTION_SHELL
$    sid      elform      shrf      nip      propt      qr/irid      icomp
        1          2          5
$    t1      t2      t3      t4      nloc
        1.0      1.0      1.0      1.0      0.0
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$$ Loading
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
$$$$$ Define motion of the punch.
$*
*BOUNDARY_PRESCRIBED_MOTION_RIGID
$    pid      dof      vad      lcid      sf      vid
        2          2          0          2      -1.0          0
$*
$$$$$ Pressure load on the holder.
$*
*LOAD_SEGMENT
$    lcid      sf      at      n1      n2      n3      n4
        1  1.000E+00  0.000E+00      907      900      901      908
        1  1.000E+00  0.000E+00      914      907      908      915
        1  1.000E+00  0.000E+00      921      914      915      922
.
.    ... in total, 144 segments defined
```

***CONTROL_CONTACT**
Hemispherical Punch

```

    1 1.000E+00 0.000E+00      1059      1052      1053      1060
    1 1.000E+00 0.000E+00      1066      1059      1060      1067
    1 1.000E+00 0.000E+00      1073      1066      1067      1074
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Rigidwalls  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$$ Prevent nodes on the holder from moving in the positive y-direction.  

$  

*RIGIDWALL_PLANAR
$ nsid     nsidex      boxid
      1
$   xt      yt      zt      xh      yh      zh      fric
      0.000    0.000    0.000    0.00000   1.00000   0.00000   0.000
$  

*SET_NODE_LIST
$ sid
      1
$   nid1     nid2     nid3     nid4     nid5     nid6     nid7     nid8
      900     901     902     903     904     905     906     907
      908     909     910     911     912     913     914     915
      916     917     918     919     920     921     922     923
      924     925     926     927     928     929     930     931
      932     933     934     935     936     937     938     939
      940     941     942     943     944     945     946     947
      948     949     950     951     952     953     954     955
      956     957     958     959     960     961     962     963
      964     965     966     967     968     969     970     971
      972     973     974     975     976     977     978     979
      980     981     982     983     984     985     986     987
      988     989     990     991     992     993     994     995
      996     997     998     999     1000    1001    1002    1003
      1004    1005    1006    1007    1008    1009    1010    1011
      1012    1013    1014    1015    1016    1017    1018    1019
      1020    1021    1022    1023    1024    1025    1026    1027
      1028    1029    1030    1031    1032    1033    1034    1035
      1036    1037    1038    1039    1040    1041    1042    1043
      1044    1045    1046    1047    1048    1049    1050    1051
      1052    1053    1054    1055    1056    1057    1058    1059
      1060    1061    1062    1063    1064    1065    1066    1067
      1068    1069    1070    1071    1072    1073    1074
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Define Curves  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  

*DEFINE_CURVE
$ lcid     sidr      scla      sclo      offa      offo
      1
$           a          o
      0.000E+00  0.000E+00
      1.000E+00  1.000E-03
      8.000E+00  1.000E-03
$  

*DEFINE_CURVE

```

*CONTROL_CONTACT

Hemispherical Punch

```

$      lcid      sidr      scla      sclo      offa      offo
$      2
$      a          o
0.000E+00      0.000E+00
1.000E+00      0.000E+00
1.125E+00      1.479E+00
1.250E+00      2.949E+00
1.375E+00      4.400E+00
1.500E+00      5.825E+00
1.625E+00      7.213E+00
1.750E+00      8.558E+00
1.875E+00      9.849E+00
2.000E+00      1.108E+01
2.125E+00      1.224E+01
2.250E+00      1.333E+01
2.375E+00      1.433E+01
2.500E+00      1.525E+01
2.625E+00      1.607E+01
2.750E+00      1.680E+01
2.875E+00      1.741E+01
3.000E+00      1.793E+01
3.125E+00      1.833E+01
3.250E+00      1.862E+01
3.375E+00      1.879E+01
3.500E+00      1.885E+01
3.625E+00      1.879E+01
3.750E+00      1.862E+01
3.875E+00      1.833E+01
4.000E+00      1.793E+01
4.125E+00      1.741E+01
4.250E+00      1.680E+01
4.375E+00      1.607E+01
4.500E+00      1.525E+01
4.625E+00      1.433E+01
4.750E+00      1.333E+01
4.875E+00      1.224E+01
5.000E+00      1.108E+01
5.125E+00      9.849E+00
5.250E+00      8.558E+00
5.375E+00      7.213E+00
5.500E+00      5.825E+00
5.625E+00      4.400E+00
5.750E+00      2.949E+00
5.875E+00      1.479E+00
6.000E+00      0.000E+00
8.000E+00      0.000E+00
$      $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      $$$$$$ Define Nodes and Elements
$      $$$$$$ Note: Boundary conditions on many of the nodes are defined here.
$      *NODE
$      node      x          y          z          tc          rc
1      0.000000E+00      0.000000E+00      0.000000E+00      6           7
2      5.833342E+00      0.000000E+00      0.000000E+00      3           4
3      1.166667E+01      0.000000E+00      0.000000E+00      3           4
.
...  in total, 1599 nodes defined

```

***CONTROL_CONTACT**
Hemispherical Punch

```
1597      0.000000E+00   -5.000533E-01   -7.462286E+01      7      7
1598      0.000000E+00   -5.000534E-01   -7.771143E+01      7      7
1599      0.000000E+00   -5.000535E-01   -8.080000E+01      7      7
$  
$$$$$$ SHELL ELEMENTS  
$  
*ELEMENT_SHELL  
$    eid      pid      n1      n2      n3      n4
     1        1        1        8        9        2
     2        1        2        9       10        3
     3        1        3       10       11        4
     .
     ... in total, 1452 shells defined
     .
1450      4      1589      1596      1597      1590
1451      4      1590      1597      1598      1591
1452      4      1591      1598      1599      1592
```


*END

*CONTROL_CONTACT


Hemispherical Punch

Results:

taurus g=d3plot
19
rx 10 rayz view

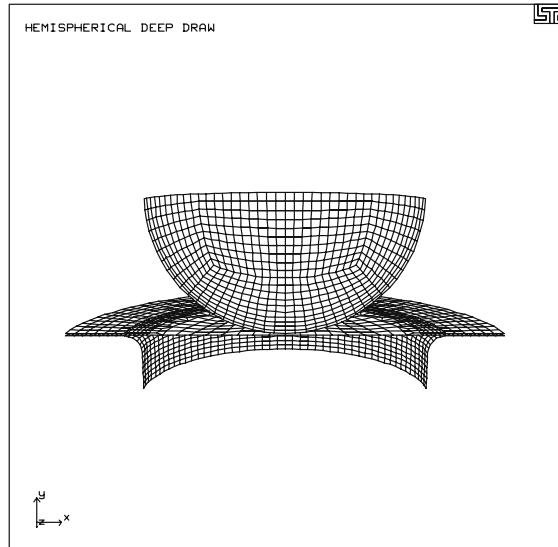

restore rx 10 state 23 explode 1 0 -20 0 1
explode 1 0 10 0 3
explode 1 0 20 0 4 rayz view

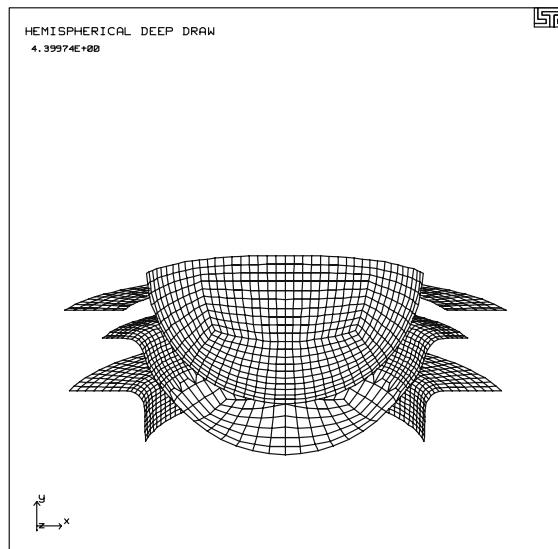

LS-DYNA Manual Section: *CONTROL_DAMPING**Additional Sections:**

*DAMPING_GLOBAL
*DATABASE_CROSS_SECTION_SET
*LOAD_NODE_SET

Example: Cantilever Beam

Filename: control_damping.beam.k

Description:

A cantilever beam is subjected to a load at the free end. The beam then vibrates relative to the equilibrium position without damping in case 1 and with damping in case 2.

Model:

The beam measures $1000 \times 100 \times 10 \text{ mm}^3$ and is modeled by 10 Belytschko-Tsay shell elements. A force of 100 N is applied in the z-direction at the free end. The calculation ends at 0.5 seconds.

Input for the undamped system:

The force at the free end is applied as two point forces. The size of these forces is controlled by load curve definition number 1 (*DEFINE_CURVE, *LOAD_NODE_SET). The ASCII-files contain information for section force data, nodal information, and shell element information. Data from ASCII-files can be processed in phase 3 of LS-TAURUS.

Input for the damped system:

The same input as in the undamped case except for a global damping constant (*DAMPING_GLOBAL, *CONTROL_DAMPING).

Reference:

Schweizerhof, K. and Weimer, K.

*CONTROL_DAMPING

Cantilever Beam

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Cantilever Beam with Damping
$
$ LSTC Example
$
$ Last Modified: September 11, 1997
$
$ Units: ton, mm, s, N, MPa, N-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Damping
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*DAMPING_GLOBAL
$      lcid      valdmp
        0          0.0
$
$$$$$ for damping of 10
$
$*DAMPING_GLOBAL
$      0          10.0
$
$$$$$ for damping of 50
$
$*DAMPING_GLOBAL
$      0          50.0
$
*CONTROL_DYNAMIC_RELAXATION
$      nrcyck      drtol      drfctr      drterm      tssfdr      irelal      edttl      idrflg
        100     1.0e-3     0.995           0.9
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$      endtim      endcyc      dtmin      endneg      endmas
        0.5001
$
*CONTROL_CONTACT
$      slsfac      rwpnal      islchk      shlthk      penopt      thkchg      orien
        0.1
$      usrstr      usrfac      nsbcs      interm      xpenen
$
*CONTROL_ENERGY
$      hgen      rwen      slnten      rylen
        2          2
$
*CONTROL_HOURGLASS
$      ihq      qh
```

*CONTROL_DAMPING Cantilever Beam

```
        4
$
*CONTROL_OUTPUT
$    nppopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
$          0          0          0          0          0          2          1000
$
*DATABASE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
$    cmpflg      ieverp      beamip
$      1
$
*DATABASE_BINARY_D3PLOT
$    dt      lcdt
$      0.020
$
*DATABASE_BINARY_D3THDT
$    dt      lcdt
$      999999
$
*DATABASE_ELOUT
$    dt
$      0.001
$
*DATABASE_HISTORY_SHELL
$    id1      id2      id3      id4      id5      id6      id7      id8
$      1
$
*DATABASE_GLSTAT
$    dt
$      0.001
$
*DATABASE_NODOUT
$    dt
$      0.001
$
*DATABASE_HISTORY_NODE
$    id1      id2      id3      id4      id5      id6      id7      id8
$      21
$
*DATABASE_SECFORC
$    dt
$      0.001
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Cross Sections
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ define a cross section through the beam to monitor force & moment
$
*DATABASE_CROSS_SECTION_SET
$    nsid      hsid      bsid      ssid      tsid      dsid
$      1
$
*SET_NODE_LIST
$    sid      da1      da2      da3      da4
$      1
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$      2
$
```

*CONTROL_DAMPING

Cantilever Beam

```
*SET_SHELL_LIST
$      sid      da1      da2      da3      da4
$      1
$      eid1      1
$  
$$$$$ Loading
$  
$$$$$ Load nodes 21 and 22 with a constant 50 N in the z-direction.
$  
*LOAD_NODE_SET
$      nsid      dof      lcid      sf      cid      m1      m2      m3
$      2          3          1          0.5
$  
*SET_NODE_LIST
$      sid      da1      da2      da3      da4
$      2
$      nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
$      21          22
$  
*DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
$      1
$      a          o
$      0.0        100.0
$      10.0       100.0
$  
$$$$$ Define Parts and Materials
$  
$$$$$ Beam - Elastic Material
$      pid      sid      mid      eosid      hgid      adpopt
$      Beam - Elastic Material
$      1          1          1
$  
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
$      1      1.00e-08  210000.0  0.300
$  
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
$      1          2          1.0      2          1.0
$      t1      t2          t3      t4      nloc
$      10.0     10.0       10.0     10.0     0.0
$  
$$$$$ Define Nodes and Elements
$  
$$$$$
```

***CONTROL_DAMPING**
Cantilever Beam


```
$  
$$$$ Nodes 1 and 2 have fixed boundary conditions (translation and rotation).  
$  
*NODE  
$ node x y z tc rc  
1 0.000000E+00 0.000000E+00 0.000000E+00 7 7  
2 0.000000E+00 1.000000E+02 0.000000E+00 7 7  
3 1.000000E+02 0.000000E+00 0.000000E+00 0 0  
. . .  
... in total, 22 nodes defined  
. . .  
20 9.000000E+02 1.000000E+02 0.000000E+00 0 0  
21 1.000000E+03 0.000000E+00 0.000000E+00 0 0  
22 1.000000E+03 1.000000E+02 0.000000E+00 0 0  
$  
$$$$ Shell Elements  
$  
*ELEMENT_SHELL  
$ eid pid n1 n2 n3 n4  
1 1 1 3 4 2  
2 1 3 5 6 4  
3 1 5 7 8 6  
4 1 7 9 10 8  
5 1 9 11 12 10  
6 1 11 13 14 12  
7 1 13 15 16 14  
8 1 15 17 18 16  
9 1 17 19 20 18  
10 1 19 21 22 20  
$  
*END
```

*CONTROL_DAMPING


Cantilever Beam

Results:

taurus g=d3plot
rx -40 head Cantilever Beam (no damping)
time 0.2 udg 1 view

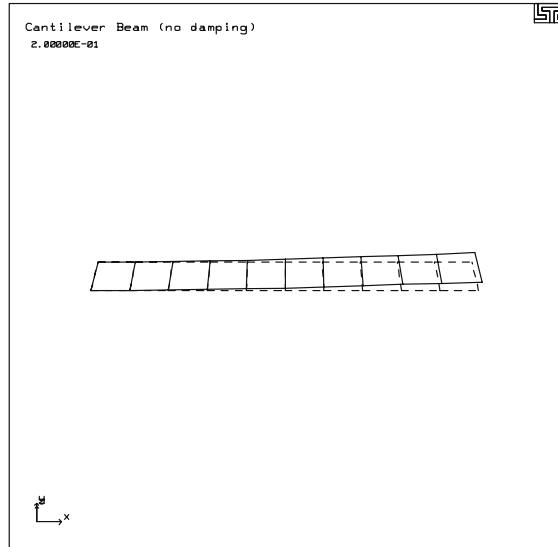

phs3 nodout
head Cantilever Beam (no damping)
oset 0 45 z-disp

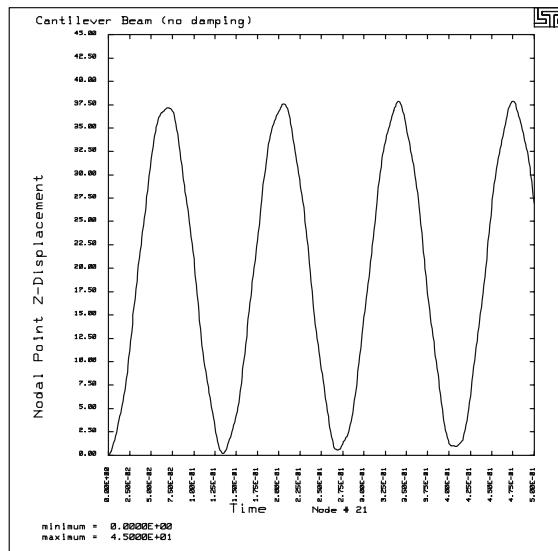


*CONTROL_DAMPING


Cantilever Beam

Results:

from phase 3, nodout - damping of DC = 10

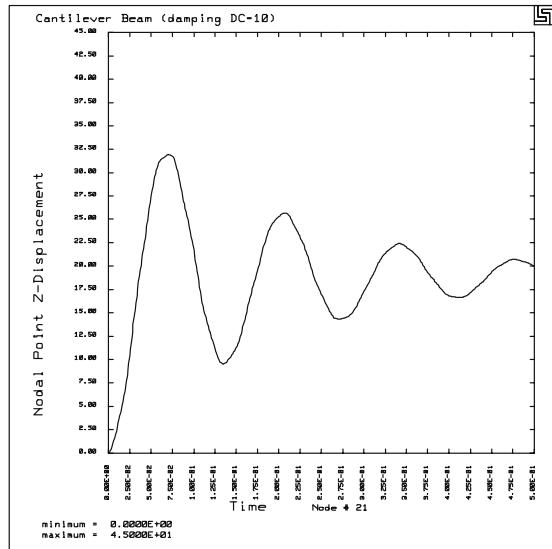

from phase 3, nodout - damping of DC = 50

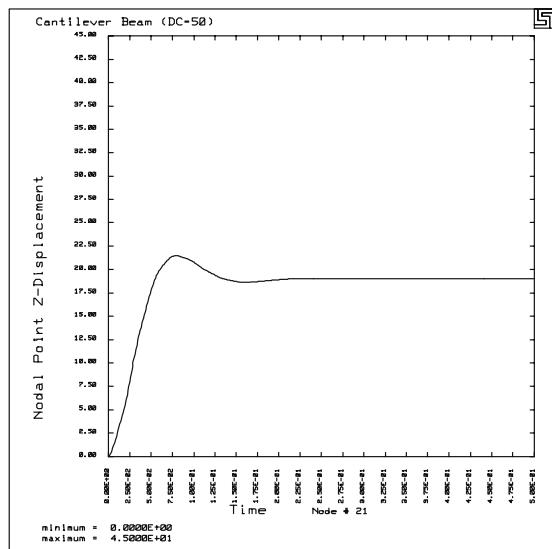

***CONTROL_DAMPING**

Cantilever Beam

LS-DYNA Manual Section: *CONTROL_ENERGY

Example: Bar Impact

Filename: control_energy.bar-impact.k

Description:

A copper bar strikes a wall.

Model:

A 1/4 symmetry bar measures 0.32 cm in radius and 3.24 cm in length and contains 972 hexahedron element. The bar starts at 0.0227 cm/ μ sec and stops at 0 cm/ μ sec. The calculation illustrates the energy balance where $E = KE + IE + HGE$.

Input:

The hourglass energy is computed at a negligible cost. (*CONTROL_ENERGY) The initial velocity for every node is set to -0.0227 except the nodes at z = 0.

Results:

The undeformed and deformed shape of the bar are shown. The total, kinetic, internal and hourglass energies are also shown.

*CONTROL_ENERGY

Bar Impact

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
bar impact
$
$ LSTC Example
$
$ Last Modified: September 12, 1997
$
$ Units: gm, cm, microsec, 1e+07 N, Mbar, 1e+07 N-cm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
     82.10
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
     2
$
*CONTROL_HOURGLASS
$    ihq         qh
     4
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
     0          0           0           0           0           2           1000
$
$
*DATABSE_BINARY_D3PLOT
$    dt         lcdn
     5.0
$
*DATABSE_BINARY_D3THDT
$    dt         lcdn
     1.0
$
*DATABSE_GLSTAT
$    dt
     0.5
$
*DATABSE_NODOUT
$    dt/cycl   lcdn
     0.5
$
*DATABSE_HISTORY_NODE
$    id1        id2        id3        id4        id5        id6        id7        id8
     1333
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Initial Conditions
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
```

*CONTROL_ENERGY Bar Impact

```

$  

$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  

$$$$ Nodes within box 2 are given an initial velocity in the neg z-direction.  

$$$$ These are all the nodes except for those on the bottom of the bar.  

$  

*INITIAL_VELOCITY  

$ nsid nsidex boxid  

$ 0 0 2  

$ vx vy vz vx e vye vze  

$ 0.0 0.0 -0.0227 0.0 0.0 0.0  

$  

*DEFINE_BOX  

$ boxid xmm xm x ymn ymx zmn zm x  

$ 2 -1.e6 1.e6 -1.e6 1.e6 0.50e-02 1.e6  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Define Parts and Materials  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  

*PART  

$ pid sid mid eosid hgid adpopt  

Bar  

1 1 1  

$  

$  

*MAT_PLASTIC_KINEMATIC  

$ mid ro e pr sigy etan beta  

1 8.930 1.17 0.350 0.004 0.001 1.0  

$ src srp fs  

0.0 0.0 0.0  

$  

$  

*SECTION_SOLID  

$ sid elform  

1 0  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Define Nodes and Elements  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Many nodes have boundary conditions to simulate symmetry.  

$  

*NODE  

$ node x y z tc rc  

1 0.000000E+00 0.000000E+00 0.000000E+00 7 7  

2 5.330000E-02 0.000000E+00 0.000000E+00 5 7  

3 1.067000E-01 0.000000E+00 0.000000E+00 5 7  

.  

... in total, 1369 nodes defined  

.  

1367 0.000000E+00 2.133000E-01 3.240000E+00 1 7  

1368 0.000000E+00 2.667000E-01 3.240000E+00 1 7  

1369 0.000000E+00 3.200000E-01 3.240000E+00 1 7  

$  

$$$$ Solid Elements

```

*CONTROL_ENERGY


Bar Impact

```
$  
*ELEMENT_SOLID  
$    eid      pid      n1      n2      n3      n4      n5      n6      n7      n8  
     1        1        8        1        2        9        45       38       39       46  
     2        1        9        2        3       10        46       39       40       47  
     3        1       10        3        4       11        47       40       41       48  
.  
...   in total, 972 solids defined  
.  
970      1     1317     1318     1327     1330     1354     1355     1364     1367  
971      1     1330     1327     1328     1331     1367     1364     1365     1368  
972      1     1331     1328     1329     1332     1368     1365     1366     1369  
$  
*END
```


***CONTROL_ENERGY**
Bar Impact

Results:

taurus g=d3plot
19
rx -90 angle 1 xtrans -1 view xtrans 2 state 17 over view

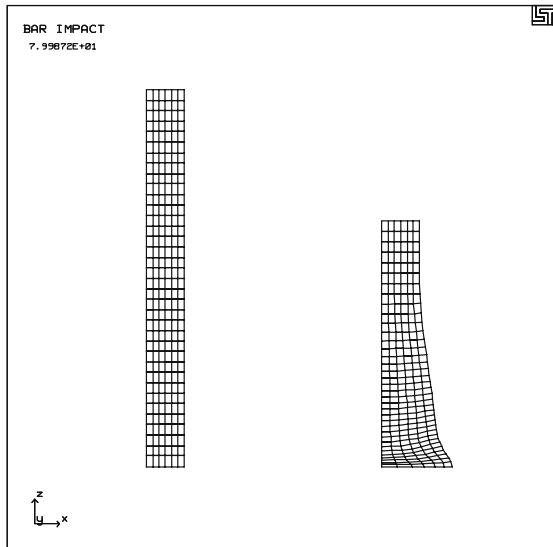

phs3 glstat
oset 0 6e-4 otxt Energies
total over kine over inter over hour

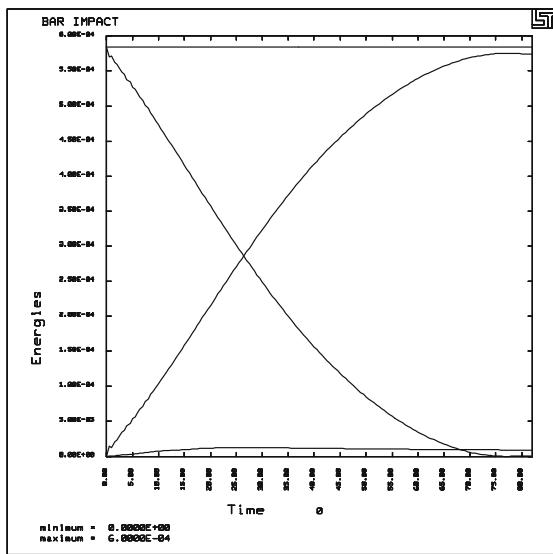

***CONTROL_ENERGY**

Bar Impact

*CONTROL_SHELL

Hemispherical Load

LS-DYNA Manual Section: *CONTROL_SHELL

Example: Hemispherical Load

Filename: control_shell.hemi-load.k

Description:

A spherical shell is subjected to outward point loads on the x-axis and inward point loads on the z-axis.

Model:

The 1/8 symmetry model of a sphere measures 10 inches in radius with a thickness of 0.04 inches. The model contains 48 shell elements. A force of one pound is applied in the positive x-direction to the node on the x-axis. A force of one pound is applied in the negative z-direction to the node on the y-axis.

Input:

The element formulation is the Hughes-Liu shell with four integration points through the thickness. Note: If B-T element formulation is used the solution would be incorrect. To fix it, the Belytschko Tsay shell requires the Belytschko-Wang-Chiang warpage stiffness modification (*CONTROL_SHELL). The concentrated loads are applied to two nodes (*DEFINE_CURVE, *LOAD_NODE_POINT).

Results:

The oscillation of the node on the z-axis shows a regular oscillatory behavior. Since there is no specified damping, oscillations would be expected.

Reference:

Belytschko, T., Wang and Chiang.

*CONTROL_SHELL

Hemispherical Load

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Twisted Beam
$
$ LSTC Example
$
$ Last Modified: September 15, 1997
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
        0.018
$
*CONTROL_OUTPUT
$    npopt       neecho      nrefup      iaccop      opifs      ipnint      ikedit
        0          0           0            0           1           2           1000
$
*CONTROL_SHELL
$    wrpang      itrlist      irnxz      istupd      theory      bwc      miter
        -2
$
$
*DATABASE_EXTENT_BINARY
$    neiph       neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
        4
$    cmpflg      ieverp      beamip
$
*DATABASE_BINARY_D3PLOT
$    dt         lcdn
        0.001
$
*DATABASE_BINARY_D3THDT
$    dt         lcdn
        0.0001
$
*DATABASE_BNDOUT
$    dt
        0.0001
$
*DATABASE_GLSTAT
$    dt
        0.0001
$
*DATABASE_NODOUT
$    dt
        0.0001
$
*DATABASE_HISTORY_NODE
$    id1        id2        id3        id4        id5        id6        id7        id8
        37
```

***CONTROL_SHELL**
Hemispherical Load

```
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$$$$$ Loading  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Load node 37, 38, 39 with 0.1667 lbs in both x and y direction.  
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*LOAD_NODE_POINT  
$      nid      dof      lcid      sf      cid      m1      m2      m3  
      37        1        1 1.667E-01  
      38        1        1 1.667E-01  
      39        1        1 1.667E-01  
      37        2        1 1.667E-01  
      38        2        1 1.667E-01  
      39        2        1 1.667E-01  
$  
*DEFINE_CURVE  
$      lcid      sidr      scla      sclo      offa      offo  
      1  
$          a           o  
      0.000E+00     1.000E+00  
      1.000E+03     1.000E+00  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Define Parts and Materials  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*PART  
$      pid      sid      mid      eosid      hgid      adpopt  
Twisted Beam  
      1        1        1  
$  
*MAT_ELASTIC  
$      mid      ro      e      pr      da      db  
      1  2.00e-4  29.00e+6  0.330  
$  
*SECTION SHELL  
$      sid      elform      shrf      nip      propt      qr/irid      icomp  
      1        0          4           0  
$      t1      t2      t3      t4      nloc  
      0.320    0.320    0.320    0.320  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Nodes 1, 2, 3 have fixed boundary conditions.  
$  
*NODE  
$      node      x      y      z      tc      rc  
      1 -5.500000E-01  0.000000E+00  0.000000E+00  7       7  
      2  0.000000E+00  0.000000E+00  0.000000E+00  7       7  
      3  5.500000E-01  0.000000E+00  0.000000E+00  7       7
```

*CONTROL_SHELL

Hemispherical Load


```
. . .
... in total, 39 nodes defined

37    0.000000E+00   -5.500000E-01   1.200000E+01      0      0
38    0.000000E+00    0.000000E+00   1.200000E+01      0      0
39    0.000000E+00    5.500000E-01   1.200000E+01      0      0
$$$$$ Shell Elements
$*
*ELEMENT_SHELL
$  eid      pid      n1      n2      n3      n4
  1        1        1        4        5        2
  2        1        2        5        6        3
.
... in total, 24 shells defined
.
23      1        34       37       38       35
24      1        35       38       39       36
$*
*END
```


***CONTROL_SHELL**
Hemispherical Load

Results:

taurus g=d3plot
19
rx -90 angle 5 mono numc s 40 contour 20

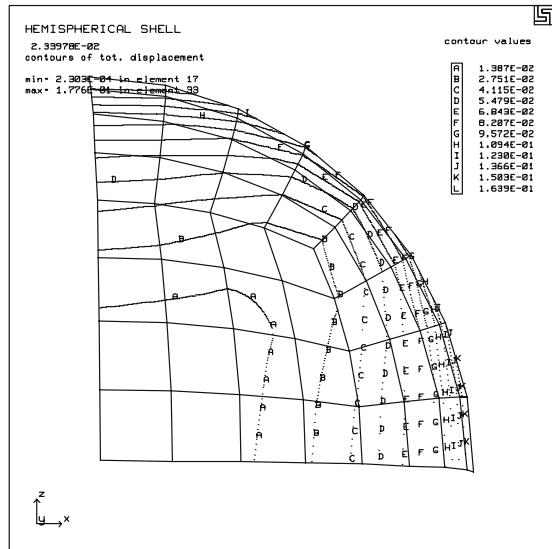

phs2
nodes 2 1 10 gather
oset 0 0.25 black ntime 3 1 1

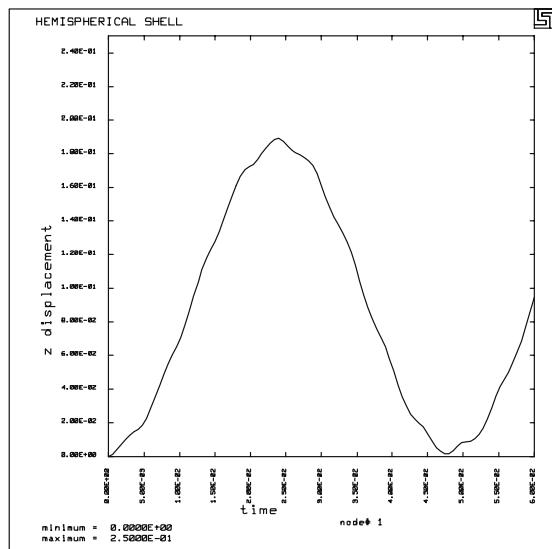

***CONTROL_SHELL**
Hemispherical Load

***CONTROL_SHELL**
Twisted Cantilever Beam

LS-DYNA Manual Section: *CONTROL_SHELL

Example: Twisted Cantilever Beam

Filename: control_shell.beam-twist.k

Description:

A beam twisted 90 degrees about its length is constrained on one edge and has a point load prescribed normal to the opposite end of the beam.

Model:

The beam measures $12.00 \times 1.10 \times 0.32$ cubic inches. A concentrated load is applied to one node on the end in the x-direction and the other node on the end in the z-direction.

Input:

This model uses the Hughes-Liu five through the thickness integration points (*CONTROL_SHELL, *SECTION_SHELL). The element has the shell normal update calculation performed at each nodal fiber every cycle (*CONTROL_SHELL). Note: This is another example that will not work correctly with the B-T shell formulation (unless warping stiffness is added).

Results:

The beam oscillates about a neutral amplitude.

Reference:

Belytschko, Wang and Chiang.

*CONTROL_SHELL

Twisted Cantilever Beam

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Hemispherical Shell
$
$ LSTC Example
$
$ Last Modified: September 12, 1997
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$ endtim    endcyc      dtmin     endneg     endmas
 6.000E-02
$
*CONTROL_ENERGY
$ hgen        rwen      slnten      rylen
 2          2
$
*CONTROL_HOURGLASS
$ ihq        qh
 4
$
*CONTROL_SHELL
$ wrpang     itrnst     irnxx      istupd      theory      bwc       miter
 -2                      1
$
$
*DATABASE_BINARY_D3PLOT
$ dt         lcdt
 6.000E-04
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Loading
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Load node 1 in the positive x-direction.
$
*LOAD_NODE_POINT
$ nid        dof        lcid        sf        cid        m1        m2        m3
 1          3          1          1.0
$
$$$$$ Load node 46 in the negative z-direction.
$
*LOAD_NODE_POINT
$ nid        dof        lcid        sf        cid        m1        m2        m3
 46         1          1          -1.0
$
$
*DEFINE_CURVE
$ lcid      sidr      scla      sclo      offa      offo
```

*CONTROL_SHELL

Twisted Cantilever Beam

```

1
$      abscissa          ordinate
      0.000E+00    1.000E+00
      1.000E+00    1.000E+00
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$ Define Parts and Materials

$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*PART
$      pid      sid      mid      eosid      hgid      adpopt
Hemisphere
      1          1          1
$
$$
*MAT_PLASTIC_KINEMATIC
$      mid      ro      e      pr      sigy      etan      beta
      1 1.000E-03 6.825E+07    0.3 600000.00 0.000E+00 0.000E+00
$      src      srp      fs
0.000E+00 0.000E+00 0.000E+00
$
$$
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
      1          5
$      t1      t2      t3      t4      nloc
4.000E-02 4.000E-02 4.000E-02 4.000E-02
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$ Define Nodes and Elements
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$ Multiple nodes have boundary conditions to simulate symmetry.
$$
*NODE
$      node      x      y      z      tc      rc
      1 0.000000E+00 0.000000E+00 1.000000E+01 1 5
      2 1.950897E+00 0.000000E+00 9.807854E+00 0 0
      3 3.826834E+00 0.000000E+00 9.238795E+00 0 0
      .
      ... in total, 61 nodes defined
      .
      59 8.180990E+00 1.705178E+00 5.492155E+00 0 0
      60 7.794079E+00 3.370117E+00 5.281538E+00 0 0
      61 7.167934E+00 4.930554E+00 4.930554E+00 0 0
$
$$$$ Shell Elements
$$
*ELEMENT_SHELL
$      eid      pid      n1      n2      n3      n4
      1          1          1          6          7          2
      2          1          2          7          8          3
      3          1          3          8          9          4
      .
      ... in total, 48 shells defined

```


***CONTROL_SHELL**
Twisted Cantilever Beam

```
46      1      59      10      15      60
47      1      60      15      20      61
48      1      61      20      25      45
$  
*END
```


***CONTROL_SHELL**
Twisted Cantilever Beam

Results:

```
taurus g=d3plot
19
ry 90 state 19 mono numc 15 contour 20
```

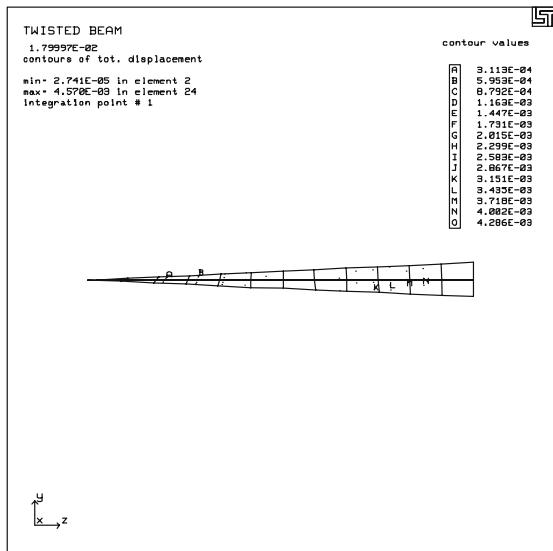

```
phs3
nodout
black y-disp
```

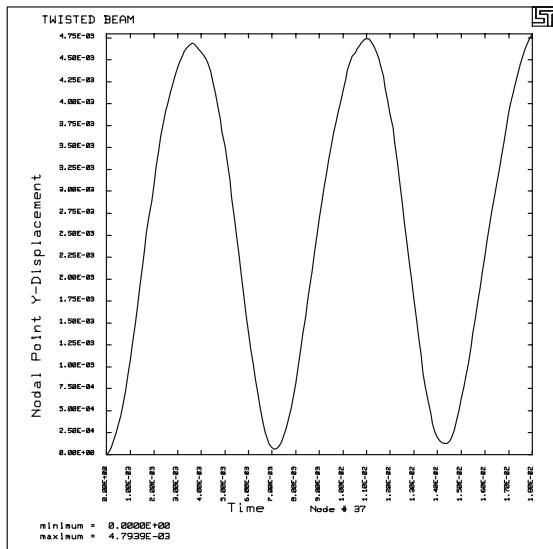

***CONTROL_SHELL**
Twisted Cantilever Beam

LS-DYNA Manual Section: *CONTROL_TIMESTEP

Example: Billet Upset

Filename: control_timestep.billet-forge.k

Description:

A rod of steel is forged between two dies. The billet upset problem is a measure of friction under forming conditions.

Model:

The billet material is isotropic elastic-plastic, and the model has 1/8 symmetry. The billet measures 2.25 inches in height and 1.26 inches in radius. The die compresses the billet 1.60 inches. The relationship between the shear friction and the normal pressure is bilinear.

Input:

The mass scaling time step size is set to 12 microseconds (*CONTROL_TIMESTEP). The billet nodes contact the die surfaces (*CONTACT_NODES_TO_SURFACE). The Coulomb frictional constant is 0.10 and the constant shear is 2,055 psi . A half sine wave defines the velocity of the die (*BOUNDARY_PRESCRIBED_MOTION).

Results:

The results show that effective plastic strains with and without timestep control are the same. CPU savings is approximately 33% on the cray J90 using 1 cpu..

Reference:

Avitzur, B., Lee, C. H. and Altan, T.

*CONTROL_TIMESTEP

Billet Upset

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
BILLET UPSET
$
$ LSTC Example
$
$ Last Modified: September 16, 1997
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
*CONTROL_TERMINATION
$ endtim    endcyc      dtmin     endneg     endmas
  0.0015
$
*CONTROL_TIMESTEP
$ dtinit      scft      isdo      tslimt      dtms      lctm      erode      ms1st
               -1.200E-07
$
*CONTROL_ENERGY
$ hgen        rwen      slnten     rylen
  2          2
$
*CONTROL_OUTPUT
$ npopt      neecho      nrefup     iaccop     opifs      ipnint     ikedit
  1          3
$
*
*DATABASE_BINARY_D3PLOT
$ dt      lcdn
  0.0001
$
*DATABASE_EXTENT_BINARY
$ neiph      neips      maxint     strflg     sigflg     epsflg     rltflg     engflg
$
$ cmpflg     ieverb     beamip
               1
$
*DATABASE_BINARY_D3THDT
$ dt      lcdn
  999999
$
*DATABASE_GLSTAT
$ dt
  0.00001
$
*DATABASE_MATSUM
$ dt
  0.00001
$
*DATABASE_RBDOUT
$ dt
  0.00001
$
*DATABASE_RCFORC
```

***CONTROL_TIMESTEP**
Billet Upset

```
$      dt
 0.00001
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Loading - PRESCRIBED_MOTION_RIGID
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
*BOUNDARY_PRESCRIBED_MOTION_RIGID
$      mid      dof      vad      lcid      sf      vid
      2          3          0          1 1.000E+00
$
*DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
      1
$      abscissa      ordinate
 0.000E+00      0.000E+00
 5.000E-05     -4.931E+00
 1.000E-04     -1.960E+01
 1.500E-04     -4.365E+01
 2.000E-04     -7.649E+01
 2.500E-04     -1.173E+02
 3.000E-04     -1.651E+02
 3.500E-04     -2.187E+02
 4.000E-04     -2.767E+02
 4.500E-04     -3.378E+02
 5.000E-04     -4.005E+02
 5.500E-04     -4.632E+02
 6.000E-04     -5.243E+02
 6.500E-04     -5.823E+02
 7.000E-04     -6.359E+02
 7.500E-04     -6.837E+02
 8.000E-04     -7.245E+02
 8.500E-04     -7.573E+02
 9.000E-04     -7.814E+02
 9.500E-04     -7.961E+02
1.000E-03     -8.010E+02
1.050E-03     -7.961E+02
1.100E-03     -7.814E+02
1.150E-03     -7.573E+02
1.200E-03     -7.245E+02
1.250E-03     -6.837E+02
1.300E-03     -6.359E+02
1.350E-03     -5.823E+02
1.400E-03     -5.243E+02
1.450E-03     -4.632E+02
1.500E-03     -4.005E+02
1.550E-03     -3.378E+02
1.600E-03     -2.767E+02
1.650E-03     -2.187E+02
1.700E-03     -1.651E+02
1.750E-03     -1.173E+02
1.800E-03     -7.649E+01
1.850E-03     -4.365E+01
1.900E-03     -1.960E+01
1.950E-03     -4.931E+00
2.000E-03      0.000E+00
2.200E-03      0.000E+00
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$

```

*CONTROL_TIMESTEP

Billet Upset

```
$  
$$$$ Define Contacts  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*CONTACT_NODES_TO_SURFACE  
$ ssid msid sstyp mstyp sboxid mboxid spr mpr  
1 2 3 3  
$ fs fd dc vc vdc penchk bt dt  
0.1 0.1 2.055E+03  
$ sfs sfm sst mst sfst sfmt fsf vsf  
  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Parts and Materials  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$ Part 1 solid: Billet - Aluminum  
$  
$$$ Part 2 shell: Press - Aluminum - rigid  
$  
*PART  
$ pid sid mid eosid hgid adpopt  
Billet - Aluminum 1 1  
1 1  
Press - Aluminum 2 2  
2 2  
$  
$$$$ materials  
$  
*MAT_PIECEWISE_LINEAR_PLASTICITY  
$ mid ro e pr sigy etan eppf tdel  
1 2.50e-4 10.00e+6 0.33  
$ c p lcsp lcsr  
  
$  
$ eps1 eps2 eps3 eps4 eps5 eps6 eps7 eps8  
0.000E+00 5.000E-03 1.000E-02 5.000E-02 1.000E-01 2.000E-01 7.000E-01 4.000E+00  
$  
$ es1 es2 es3 es4 es5 es6 es7 es8  
4.785E+03 6.505E+03 7.423E+03 1.063E+04 1.254E+04 1.482E+04 2.010E+04 3.081E+04  
$  
$  
*MAT_RIGID  
$ mid ro e pr n couple m alias  
2 2.50e-4 10.00e+6 0.33  
$ cmo con1 con2  
-1.0 0.0 110111  
$ lco/a1 a2 a3 v1 v2 v3  
0.0  
$  
$$$$ sections  
$  
*SECTION_SOLID  
$ sid elform  
1 0
```

***CONTROL_TIMESTEP**
Billet Upset

```

*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
      2
$      t1      t2      t3      t4      nloc
  1.000E-02  1.000E-02  1.000E-02  1.000E-02
$  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$$$$ Define Nodes and Elements
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$$$$ Many nodes have boundary conditions in order to simulate symmetry.
$  

*NODE
$      node          x          y          z          tc          rc
      1      0.000000E+00  0.000000E+00  0.000000E+00  7          7
      2      4.687500E-02  0.000000E+00  0.000000E+00  5          7
      3      9.375000E-02  0.000000E+00  0.000000E+00  5          7
      .
      ... in total, 5755 nodes defined
      .
      5753      9.731613E-01  8.317921E-01  1.126000E+00  0          0
      5754      1.018930E+00  8.704337E-01  1.126000E+00  0          0
      5755      1.064698E+00  9.090752E-01  1.126000E+00  0          0
$  

$$$$$ Solid Elements
$  

*ELEMENT_SOLID
$      eid      pid      n1      n2      n3      n4      n5      n6      n7      n8
      1      1      1      2      11      10      82      83      92      91
      2      1      2      3      12      11      83      84      93      92
      3      1      3      4      13      12      84      85      94      93
      .
      ... in total, 4576 solids defined
      .
      4574      1      5307      5308      3627      3618      5379      5380      3708      3699
      4575      1      5308      5309      3636      3627      5380      5381      3717      3708
      4576      1      5309      5310      3645      3636      5381      5382      3726      3717
$  

$$$$$ Shell Elements
$  

*ELEMENT_SHELL
$      eid      pid      n1      n2      n3      n4
      1      2      5383      5394      5395      5384
      2      2      5384      5395      5396      5385
      3      2      5385      5396      5397      5386
      .
      ... in total, 340 shells defined
      .
      338      2      5752      5602      5613      5753
      339      2      5753      5613      5624      5754
      340      2      5754      5624      5635      5755
$  

*END


```

*CONTROL_TIMESTEP


Billet Upset

Results:

taurus g=d3plot
19
rx -90 angle 5 m 1 view

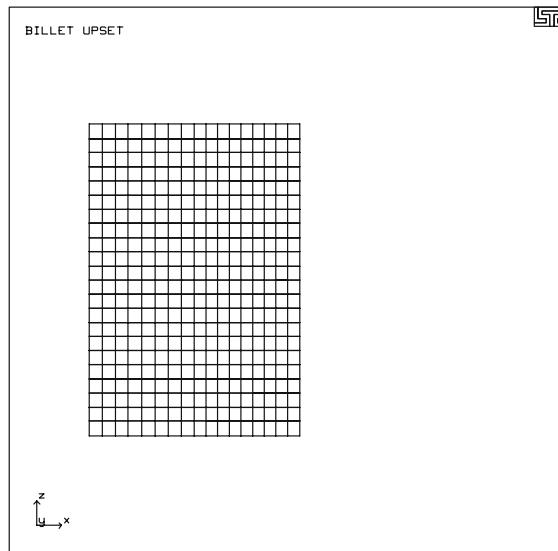

state 16
numc 15 mono
contour 7

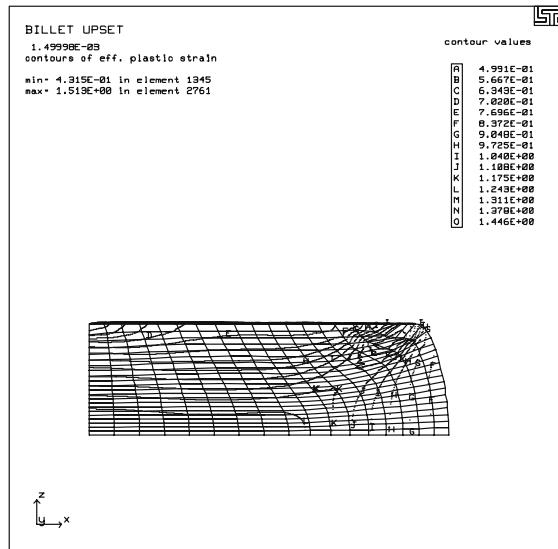

LS-DYNA Manual Section: *CONTROL_ADAPTIVE

Additional Sections:

*DAMPING_GLOBAL
*LOAD_RIGID_BODY

Example: Deep Drawing with Adaptivity

Filename: control_adaptive.cup-draw.k

Description:

This problem includes three tools a punch, a binder and a die and also includes a blank to be formed. The blank is deep drawn by the punch while the binder and die hold the blank edges and help prevent wrinkling. During the process, adaptivity is employed to refine the mesh of the blank to improve accuracy.

Model:

Only 1/4 of the system is modeled because of symmetry. The binder pushes down on the blank against the die using a *LOAD_RIGID command to model the boundary edge condition. The punch is moved down onto the blank with a *BOUNDARY_PRESCRIBED_MOTION_RIGID command. Global damping and contact damping are defined to prevent local nodal vibrations. The time step size is controlled with mass scaling because inertial effects are insignificant in this problem. One way surface to surface contact is defined between the major parts. This allows the drawing (i.e., contact) forces to be monitored using the rforc ascii output file.

Results:

During the drawing operation, the mesh is refined considerably.

*CONTROL_ADAPTIVE

Deep Drawing with Adaptivity

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
deep drawing - blankholder contact damping , mesh refinement
$
$ LSTC Example
$
$ Last Modified: October 14, 1997
$
$ - adaptive meshing
$
$ - the binder pushes down on the blank against the die using a *LOAD_RIGID
$     for the boundary edge condition
$
$ - the punch is moved down onto the blank with a
$     *BOUNDARY_PRESCRIBED_MOTION_RIGID
$
$ - global damping and contact damping
$
$ - time step is controlled with mass scaling
$
$ - there are a lot of constrained nodes defined in *NODE (tc,rc)
$
$
$ Units: gm, cm, micro-s, 1e7N, Mbar, 1e7N-cm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
    700.0
$
*CONTROL_CONTACT
$    slsfac      rwpnal      islchk      shlthk      penopt      thkchg      orien
    .01          0.           2             1
$    usrstr       usrfrc      nsbcs       interm      xpene       ssthk       ecdt       tiedprj
$
*CONTROL_ENERGY
$    hgen        rwen        slnten      rylen
    2            2             2
$
*CONTROL_OUTPUT
$    npopt       neecho      nrefup      iaccop      opifs       ipnint      ikedit
    1            3
$
*CONTROL_SHELL
$    wrpang      itrlist      irnxx      istupd      theory      bwc        miter
    20.0         1             0             1
$
*CONTROL_TIMESTEP
$    dtinit      scft        isdo        tslimt      dtms       lctm        erode      ms1st
    0.           0.           0             0.          -0.25        0           0
$
```

*CONTROL_ADAPTIVE

Deep Drawing with Adaptivity

```

*DATABASE_BINARY_D3PLOT
$      dt          lcdn
        40.0
$
*DATABASE_GLSTAT
$      dt
        1.0
$
*DATABASE_MATSUM
$      dt
        1.0
$
*DATABASE_RBDOUT
$      dt
        5.0
$
*DATABASE_RCFORC
$      dt
        1.0
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$  Adaptivity
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*CONTROL_ADAPTIVE
$  adpfreq     adptol     adpopt    maxlvl    tbirth    tdeath    lcadp    ioflag
      5.0e+0      0.1        2          2         0.0       0.0        0          0
$
$
*DAMPING_GLOBAL
$  lcid      valdmp
      3
$
*DEFINE_CURVE
$  lcid      sidr      sclra      sclo      offa      offo
      3
$      abscissa           ordinate
        0.000E+00      0.000E+00
        1.000E+04      0.000E+00
        1.001E+04      3.000E+03
        2.000E+04      3.000E+03
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$  Loading and Boundary Conditions
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*BOUNDARY_PRESCRIBED_MOTION_RIGID
$  pid      dof      vad      lcid      sf      vid      death
      1        2        0        1      -1.
$
*DEFINE_CURVE
$  lcid      sidr      sclra      sclo      offa      offo
      1
$      abscissa           ordinate

```

*CONTROL_ADAPTIVE

Deep Drawing with Adaptivity

```

0.000E+00      0.000E+00
1.000E+02      2.912E-03
2.000E+02      5.540E-03
3.000E+02      7.625E-03
4.000E+02      8.963E-03
5.000E+02      9.425E-03
6.000E+02      8.963E-03
7.000E+02      7.625E-03
8.000E+02      5.540E-03
9.000E+02      2.912E-03
1.000E+03      0.000E+00

$ From a sheet metal forming example. A blank is hit by a punch, a binder is
$ used to hold the blank on its sides. The rigid holder (part 2) is held
$ against the blank using a load applied to the cg of the holder.
$
$ The direction of the load is in the y-direction (dof=2) but is scaled
$ by sf = -1 so that the load is in the correct direction. The load
$ is defined by load curve 2.
$
$ *LOAD_RIGID_BODY
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$     pid      dof      lcid      sf      cid      m1      m2      m3
        2          2          2       -1.0
$
*$DEFINE_CURVE
$     lcid      sidr      scla      sclo      offa      offo
        2
$         abscissa      ordinate
        0.000E+00      8.000E-05
        1.000E+04      8.000E-05
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Parts and Materials
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*$PART
$     pid      sid      mid      eosid      hgid      grav      adpopt
punch      1          1          2          0          0          0          0
binder      2          1          2          0          0          0          0
blank       3          1          1          0          0          0          1
die         4          1          2          0          0          0          0
$
$
*$MAT_PLASTIC_KINEMATIC
$     mid      ro      e      pr      sigy      etan      beta
        1  2.700E+00  0.690E+00  3.000E-01  8.180E-04  0.010E+00  1.000E+00  0.000E+00
$     src      srp      fs
        0.000E+00  0.000E+00
$
$
*$MAT_RIGID
$
$     mid      ro      e      pr      n      couple      m      alias

```

*CONTROL_ADAPTIVE

Deep Drawing with Adaptivity

```

2 8.450E-00 0.690E+00 3.000E-01 0.000E+00 0.000E+00 0.000E+00 0.000E+00
$      cmo      con1      con2
0.000E+00 0.000E+00
$      lco/a1      a2      a3      v1      v2      v3

$      *
$      *
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
1      2      1.      5.      0.      0.
$      t1      t2      t3      t4      nloc
.100      .100      .100      .100
$      **** Define Contacts - sliding interface definitions
$      ****
$      **** contact between blank (slaves) and punch (master)
$      *
*CONTACT_ONE_WAY_SURFACE_TO_SURFACE

$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
3      1      2      2      0      0      0      0
$      fs      fd      dc      vc      vdc      penchk      bt      dt
.2      .2      0      0      20.      0      0      0
$      sfs      sfm      sst      mst      sfst      sfmt      fsf      vsf
0      0      0      0      0      0      0      0
$      *
$      **** contact between blank (slaves) and binder (master)
$      *
*CONTACT_ONE_WAY_SURFACE_TO_SURFACE
3      2      2      2      0      0      0      0
.2      .2      0      0      20.      0      0      0
0      0      0      0      0      0      0      0
$      *
$      **** contact between blank (slaves) and die (master)
$      *
*CONTACT_ONE_WAY_SURFACE_TO_SURFACE
3      4      2      2      0      0      0      0
.2      .2      0      0      20.      0      0      0
0      0      0      0      0      0      0      0
$      *
$      *SET_PART
$      sid
3
$      pid
3
$      *SET_PART
1
1
$      *SET_PART
2

```

*CONTROL_ADAPTIVE


Deep Drawing with Adaptivity

```
2
$ *SET_PART
4 4
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$$ Define Nodes and Elements
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *NODE
$   nid          x          y          z      tc      rc
    1 0.00000000E+00 0.505000019E+01-0.500000000E+01      6       7
    2 0.392295510E+00 0.505000019E+01-0.498458672E+01      6       7
    .
    ... in total, 1799 nodes defined
    .
    1798 0.523225009E+00-0.100000001E+00-0.798287010E+01      7       7
    1799-0.349690993E-06-0.100000001E+00-0.800000000E+01      7       7
$ $$$$$$$$$$ Shell Elements
$ *ELEMENT_SHELL
$   eid      pid      n1      n2      n3      n4
    1        1        1       12       13       2
    2        1        2       13       14       3
    .
    ... in total, 1644 shells defined
    .
    1643      4     1772     1797     1798     1773
    1644      4     1773     1798     1799     1774
$ *END
```


*CONTROL_ADAPTIVE Deep Drawing with Adaptivity

Results:

taurus g=d3plot
rx 45 m 3 s 15 center
state 1 view

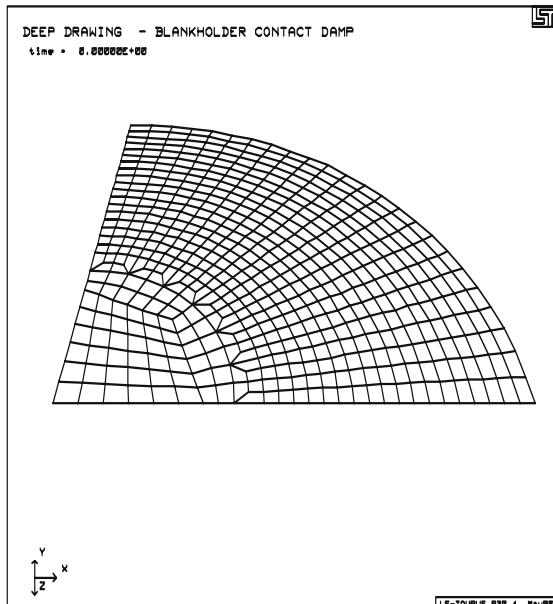

state 15
view

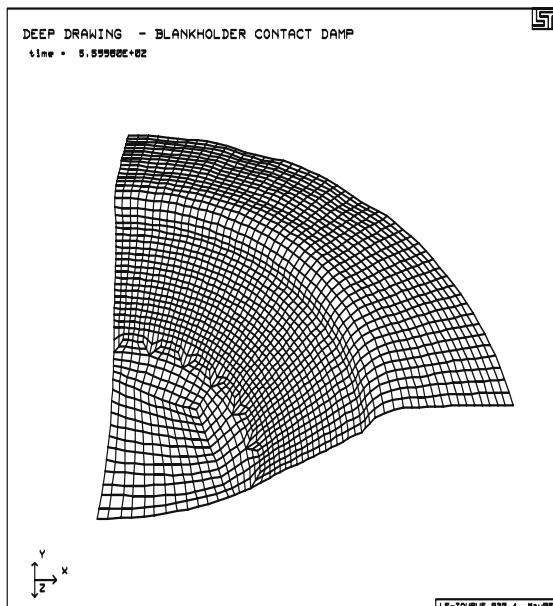

***CONTROL_ADAPTIVE**
Deep Drawing with Adaptivity

*CONTROL_ADAPTIVE

Square Crush Tube with Adaptivity

LS-DYNA Manual Section: *CONTROL_ADAPTIVE

Additional Sections:

*CONTROL_SUBCYCLE

Example: Square Crush Tube with Adaptivity

Filename: control_adaptive.square-beam.k

Description:

A square cross section of a crush tube uses adaptivity to re-fine the mesh as needed to improve accuracy..

Model:

Only 1/4 of the tube is modeled because of symmetry. The nodes on top of the crush tube are assigned extra mass with *ELEMENT_MASS and given an initial velocity in the y-direction of -5,646 mm/s. The nodes on the bottom of the tube are fixed in y-translation. Automatic single surface contact is defined to prevent penetration when the folds of the crush tube start to form. The model has subcycling defined.

Results:

The mesh at the fold location in the crush tube is automatically re-fined as the crush progresses.

*CONTROL_ADAPTIVE

Square Crush Tube with Adaptivity

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
square cross section for single surface contact and adaptivity test
$
$ LSTC Example
$
$ Last Modified: October 15, 1997
$
$ Units: ton, mm, s, N, MPa, N-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
  3.000E-03
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
      2           2           2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
      1           3
$
$
*DATABASE_BINARY_D3PLOT
$    dt        lcdn
  0.999e-4
$
*DATABASE_GLSTAT
$    dt
  0.00002
$
*DATABASE_MATSUM
$    dt
  0.00002
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Adaptivity
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_ADAPTIVE
$    adpfreq     adptol      adpopt      maxlvl      tbirth      tdeath      lcadp      ioflag
  1.0e-4       5.0          2           2           0.0         0.0          0
$
$
*CONTROL_SUBCYCLE
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
```

*CONTROL_ADAPTIVE

Square Crush Tube with Adaptivity

```

$$$$$ Initial Conditions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*INITIAL_VELOCITY_NODE
$      nid          vx          vy          vz          vxr         vyv         vzz
          650.0000E+00-0.5646E+40.0000E+00
          660.0000E+00-0.5646E+40.0000E+00
          990.0000E+00-0.5646E+40.0000E+00
         1320.0000E+00-0.5646E+40.0000E+00
         1650.0000E+00-0.5646E+40.0000E+00
         1980.0000E+00-0.5646E+40.0000E+00
         4230.0000E+00-0.5646E+40.0000E+00
         4560.0000E+00-0.5646E+40.0000E+00
         4890.0000E+00-0.5646E+40.0000E+00
         5220.0000E+00-0.5646E+40.0000E+00
         5550.0000E+00-0.5646E+40.0000E+00
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Constraints
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONSTRAINED_NODE_SET
$      nsid        dof
          11           2
$
*SET_NODE
$      sid        da1
          11           11
$      nid1        nid2        nid3        nid4        nid5        nid6        nid7        nid8
          65            66          99         132         165         198         423         456
          489          522         555
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Define Contacts - sliding interface definitions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTACT_AUTOMATIC_SINGLE_SURFACE
$      ssid        msid        sstyp        mstyp        sboxid        mboxid        spr        mpr
          1             0             2             0
$      fs          fd          dc          vc          vdc          penchk        bt         dt
$      sfs         sfm         sst         mst         sfst         sfmt         fsf         vsf
$
$
*SET_PART
$      sid        da1
          1             1
$      pid
          1

```

*CONTROL_ADAPTIVE

Square Crush Tube with Adaptivity

```
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$$$$ Define Parts and Materials
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ . . . > . . . 1 . . . > . . . 2 . . . > . . . 3 . . . > . . . 4 . . . > . . . 5 . . . > . . . 6 . . . > . . . 7 . . . > . . . 8
$ *PART
$     pid      sid      mid      eosid      hgid      grav      adpopt
square-tube          1           1           1           0           0           0           1
$ *
$ *MAT_PLASTIC_KINEMATIC
$     mid      ro       e        pr      sigy      etan      beta
$           1 7.850E-09 1.994E+05 3.000E-01 3.366E+02 1.000E+00 1.000E+00 0.000E+00
$     src      srp      fs
$ *
$ *SECTION_SHELL
$     sid      elform      shrf      nip      propt      qr/irid      icomp
$           1           2           1.           3.           0.           0.           0
$     t1      t2      t3      t4      nloc
$           1.2         1.2         1.2         1.2
$ $$$ Define Nodes and Elements
$ . . . > . . . 1 . . . > . . . 2 . . . > . . . 3 . . . > . . . 4 . . . > . . . 5 . . . > . . . 6 . . . > . . . 7 . . . > . . . 8
$ *NODE
$     nid      x              y              z      tc      rc
$     1-3.501449966E+01 0.000000000E+00-3.501800156E+01      0           0
$     2-3.003639984E+01 0.000000000E+00-3.496210098E+01      0           0
$     .
$     ... in total, 715 nodes defined
$     .
$     714-3.504100037E+01-1.550000000E+02-4.540000111E-02      3           4
$     715-3.497240067E+01-1.600000000E+02 1.499999966E-02      7           7
$ $$$ Elements - Shells
$ *ELEMENT_SHELL
$     eid      pid      n1      n2      n3      n4
$     1           1           1           2           4           3
$     2           1           3           4           6           5
$     .
$     ... in total, 640 shells defined
$     .
$     639           1           681           682           714           713
$     640           1           682           683           715           714
$ . . . > . . . 1 . . . > . . . 2 . . . > . . . 3 . . . > . . . 4 . . . > . . . 5 . . . > . . . 6 . . . > . . . 7 . . . > . . . 8
$ $$$ Elements - Discrete Masses
```

***CONTROL_ADAPTIVE**
Square Crush Tube with Adaptivity


```
$  
*ELEMENT_MASS  
$ eid nid mass  
 65   65  1.000E-02  
 66   66  1.000E-02  
 99   99  1.000E-02  
132  132 1.000E-02  
165  165 1.000E-02  
198  198 5.000E-03  
423  423 1.000E-02  
456  456 1.000E-02  
489  489 1.000E-02  
522  522 1.000E-02  
555  555 5.000E-03  
$  
*END
```

*CONTROL_ADAPTIVE


Square Crush Tube with Adaptivity

Results:

taurus g=d3plot
ry 120 xtran -150 v xtran 150 s 5 over v
xtran 150 s 20 over v

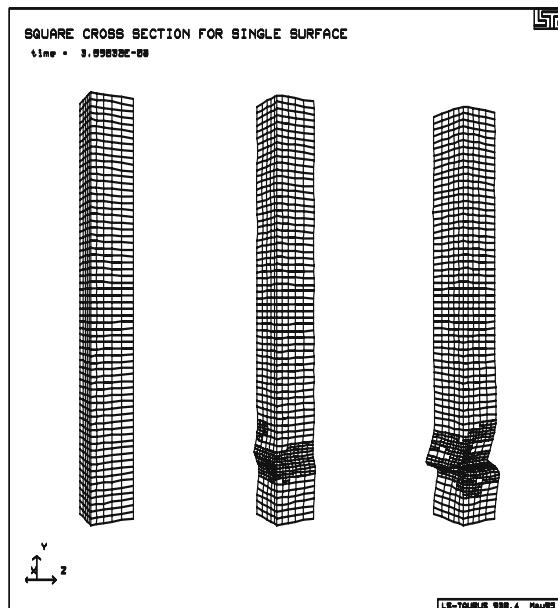

phs3 glstat
otxt Total, Kinetic and Internal Energy
oset 0 1.6e6 total over kine over inte

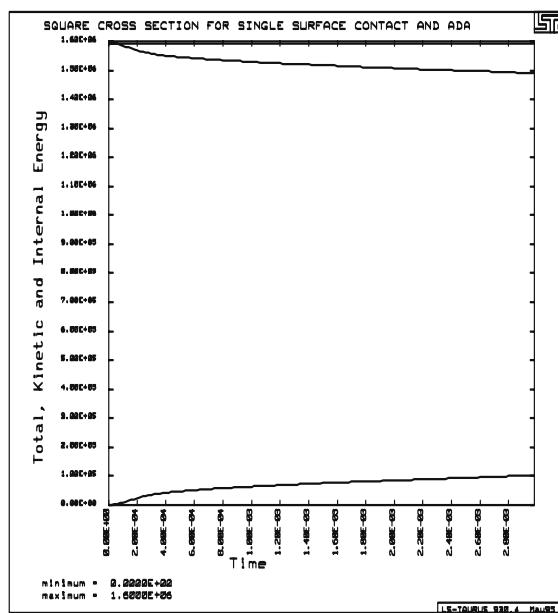

*CONTROL_ADAPTIVE

Cylinder Undergoing Deformation with Adaptivity

LS-DYNA Manual Section: *CONTROL_ADAPTIVE

Additional Sections:

*DEFINE_COORDINATE_VECTOR

Example: Cylinder Undergoing Deformation with Adaptivity

Filename: control_adaptive.cylinder.k

Description:

Several nodes on a cylinder are given initial velocities towards the center of the cylinder causing the cylinder to indent. To improve accuracy, adaptivity is defined so that the mesh of the cylinder is re-fined during the deformation.

Model:

Only 1/4 of the system is modeled because of symmetry. The boundary conditions on the cylinder are defined with single point constraints (SPC's). Because of the geometry orientation, several of the SPC's require local coordinate system defined using the keyword *DEFINE_COORDINATE_VECTOR.

Results:

Before and after mesh refinement are shown in the figures. Additionally, the total, kinetic and internal energy from the glstat ascii file are shown. The entire initial kinetic energy is absorbed by the cylinder due to material deformation (internal energy).

*CONTROL_ADAPTIVE

Cylinder Undergoing Deformation with Adaptivity

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
ADAPTIVITY: circular cylinder (8x16)
$
$ LSTC Example
$
$ Last Modified: October 14, 1997
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endeng      endmas
     0.0004
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
     2           2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
     1           3
$
*CONTROL_SHELL
$    wrpang      itrhist      irnx      istupd      theory      bwc      miter
           1           2           1           2           1
$
$
*DATABASE_BINARY_D3PLOT
$    dt         lcdt
     0.00002
$
*DATABASE_GLSTAT
$    dt
     0.00002
$
*DATABASE_MATSUM
$    dt
     0.00002
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$$ Adaptivity
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_ADAPTIVE
$    adpfreq     adptol      adpopt      maxlvl      tbirth      tdeath      lcadp      ioflag
     1.01e-5      10.0       2           3           0.0          0.0          0           1
$
```

***CONTROL_ADAPTIVE**
Cylinder Undergoing Deformation with Adaptivity

```

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ Define Parts and Materials
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ .>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *PART
$     pid      sid      mid      eosid      hgid      grav      adpopt
al6061-t6
    1        1        1        0        0        0        1
$ *
$ *
*MAT_PLASTIC_KINEMATIC
$     mid      ro       e       pr      sigy      etan      beta
    1  2.500E-04  1.050E+07  3.300E-01  4.400E+04  0.000E+00  1.000E+00
$ *
$     src      srp      fs
  0.000E+00  0.000E+00
$ *
$ *
*SECTION_SHELL
$     sid      elform      shrf      nip      propt      qr/irid      icomp
    1        2        1.        5.        0.        0.        0
$     t1        t2        t3        t4      nloc
  0.125      0.125      0.125      0.125
$ *
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ Boundary Conditions
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ .>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *BOUNDARY_SPC
$     nid      cid      dofxx      dofyy      dofzz      dofrx      dofry      dofrz
    1        1        1        1        0        0        1        1
    18       2        0        1        0        0        1        1
    35       3        0        1        0        0        1        1
.
...  in total, 48 SPC's defined
.
    68        4        1        1        0        0        1        1
    85        5        1        1        0        0        1        1
    102       6        1        1        0        0        1        1
    119       7        1        1        0        0        1        1
    120       8        0        1        0        0        1        1
    153       1        1        1        1        1        1        1
$ *
$ *
*DEFINE_COORDINATE_VECTOR
$     cid      xx      yx      zx      xv      yv      zv
    1        1.        0.        0.        0.        1.        0.
    2  0.99144 -0.13053  0.00000  0.13053  0.99144  0.00000
    3  0.96593 -0.25882  0.00000  0.25882  0.96593  0.00000
    4  0.92388 -0.38268  0.00000  0.38268  0.92388  0.00000
    5  0.86603 -0.50000  0.00000  0.50000  0.86603  0.00000
    6  0.79335 -0.60876  0.00000  0.60876  0.79335  0.00000
    7  0.70711 -0.70711  0.00000  0.70711  0.70711  0.00000
    8  0.60876 -0.79335  0.00000  0.79335  0.60876  0.00000
    9  0.50000 -0.86603  0.00000  0.86603  0.50000  0.00000

```

*CONTROL_ADAPTIVE

Cylinder Undergoing Deformation with Adaptivity


```
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$$$$$ Initial Conditions  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*INITIAL_VELOCITY_NODE  
$      nid          vx          vy          vz          vxr         vyv         vzr
     2          0.00       -5650.00        0.00        0.00        0.00        0.00
    19         -737.47      -5601.66        0.00        0.00        0.00        0.00
    .
    .   ... in total, 65 initial nodal velocities defined
    .
    .
    .
    48     -1462.33     -5457.48        0.00        0.00        0.00        0.00
    53     -2162.16     -5219.92        0.00        0.00        0.00        0.00
    82     -2825.00     -4893.04        0.00        0.00        0.00        0.00
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*NODE  
$      nid          x           y           z          tc          rc
     1  0.000000000E+00  0.294000006E+01  0.000000000E+00        0          0
     2  0.000000000E+00  0.294000006E+01-0.785000026E+00        0          0
    .
    .   ... in total, 153 nodes defined
    .
    .
    .
    152  0.254611492E+01  0.147000003E+01-0.117749996E+02        0          0
    153  0.254611492E+01  0.147000003E+01-0.125600004E+02        0          0
$  
$$$$$$$$$$$$$ Shell Elements  
$  
*ELEMENT_SHELL  
$      eid          pid          n1          n2          n3          n4
     1          1          1          18          19          2
     2          1          2          19          20          3
    .
    .   ... in total, 128 shells defined
    .
    .
    .
    127          1          134         151         152         135
    128          1          135         152         153         136
*END
```

*CONTROL_ADAPTIVE


Cylinder Undergoing Deformation with Adaptivity

Results:

taurus g=d3plot
angle 1 ry 90 rx -45 ry -45 ytrans 3 view
ytrans -6 s 20 over view

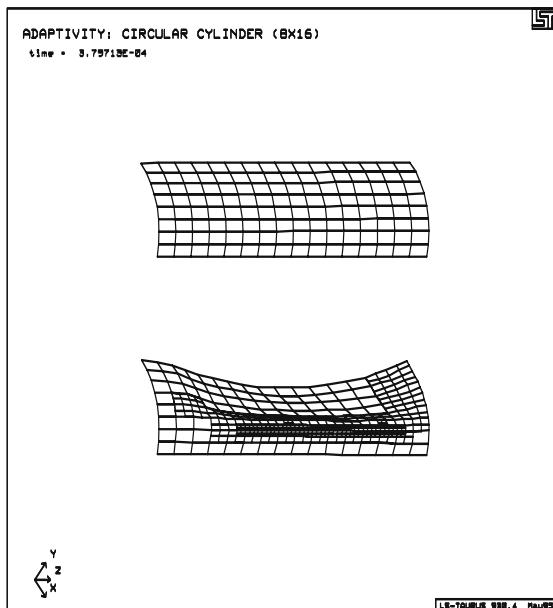

phs3 glstat
otxt Total, Kinetic and Internal Energy
oset 0 9e3 total over kine over inte

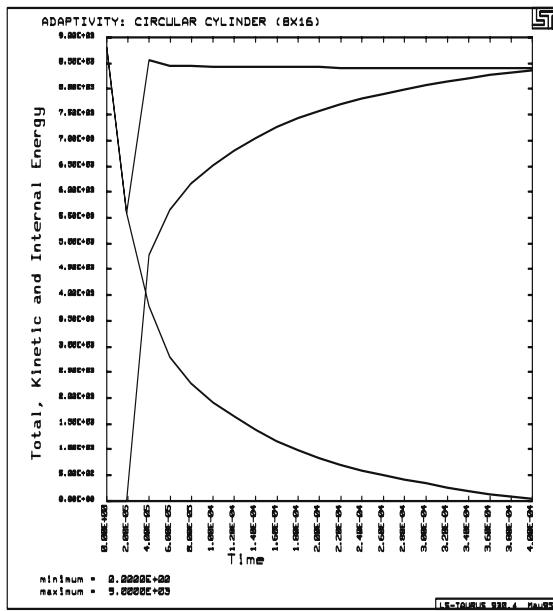

***CONTROL_ADAPTIVE**

Cylinder Undergoing Deformation with Adaptivity

***DAMPING_GLOBAL**

Tire Bounces on the Ground and Damps Out

LS-DYNA Manual Section: *DAMPING_GLOBAL

Additional Sections:

***CONTROL_DAMPING**

***LOAD_BODY_Z**

Example: Tire Bounces on the Ground and Damps Out

Filename: damping.tire.k

Description:

A simple model of a tire is placed under gravity loading and drops onto rigid solid elements. Fully integrated shell elements are used for the tire to prevent hourgassing from damping out the model. Additionally, rigid solid elements are used for modeling the ground instead of a rigidwall because the rigidwall will also damp the system because of its' perfectly plastic contact definition. Thus, to damp out the bouncing, global damping is applied to the system.

Model:

Global damping of 0.5 is applied to the system using the *DAMPING_GLOBAL keyword. Contact between the tire and ground is defined using node to surface contact. Gravity is applied with the *LOAD_BODY_Z command.

Results:

The total energy of the system comes from the external energy of gravity (potential energy of “mgh”). This energy is absorbed by the damping in the model.

*DAMPING_GLOBAL

Tire Bounces on the Ground and Damps Out

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
A simple tire bouncing on the ground with damping.
$
$ LSTC Example
$
$ Last Modified: October 13, 1997
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endeng      endmas
        40.01
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
        2           2           2           2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
        1           3
$
*DATABSE_BINARY_D3PLOT
$    dt         lcdn
        10.0
$
*DATABSE_BINARY_D3THDT
$    dt         lcdn
        999999
$
*DATABSE_GLSTAT
$    dt
        0.1
$
*DATABSE_MATSUM
$    dt
        0.1
$
*DATABSE_NODOUT
$    dt
        0.1
$
*DATABSE_HISTORY_NODE
$    id1        id2        id3        id4        id5        id6        id7        id8
        8914        8746        8918
$
*DATABSE_RCFORC
$    dt
        0.1
$
*DATABSE_RWFORC
$    dt
```

***DAMPING_GLOBAL**
Tire Bounces on the Ground and Damps Out

```
0.1
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Damping
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*DAMPING_GLOBAL
$    lcid      valdmp
        0          0.5
$ 
*CONTROL_DYNAMIC_RELAXATION
$    nrcyck      drtol      drfctr      drterm      tssfdr      irelal      edttl      idrflg
        100     1.0e-3     0.995           0.9
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Gravity
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
*LOAD_BODY_Z
$    lcid      df      lciddr      xc      yc      zc
        1  9.810E-03
$ 
$ 
*DEFINE_CURVE
$    lcid      sidr      scla      sclo      offa      offo
        1
$ 
$        abscissa      ordinate
            0.00          1.000
            1000.00         1.000
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Contacts - sliding interface definitions
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
$$$$ Prevent the nodes of the tire from penetrating the ground.
$ 
*CONTACT_NODES_TO_SURFACE
$ 
$    ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
        36          76          3          3
$ 
$    fs       fd       dc       vc       vdc      penchk      bt       dt
$ 
$    sfs      sfm      sst      mst      sfst      sfmt      fsf      vsf
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Parts and Materials
```

*DAMPING_GLOBAL

Tire Bounces on the Ground and Damps Out

```
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
*PART  
$ pid sid mid eosid hgid grav adpopt  
wheel 35 1 1  
tire 36 1 1  
ground 76 76 2  
$  
$$$$ Materials  
  
$  
*MAT_PIECEWISE_LINEAR_PLASTICITY  
$ mid ro e pr sigy etan eppf tdel  
1 0.783E-05 200.0 0.3 0.207  
$ Cowper/Symonds Strain Rate Parameters  
$ C p lcsp lcsr  
40 5  
$ Plastic stress/strain curves  
0.000 0.080 0.160 0.400 1.000  
0.207 0.250 0.275 0.290 0.300  
$  
$  
*MAT_RIGID  
$ mid ro e pr n couple m alias  
2 0.783E-05 200.0 0.3  
$  
$ cmo con1 con2  
1.0 7 7  
$  
$ lco/a1 a2 a3 v1 v2 v3  
  
$  
$$$$ Sections  
$  
*SECTION_SHELL  
$ sid elform shrf nip propt qr/irid icomp  
1 6 3.0000  
$ t1 t2 t3 t4 nloc  
1.00 1.00 1.00 1.00  
$  
$  
*SECTION_SOLID  
76 1  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
*NODE  
$ nid x y z tc rc  
8719 -1.16673000E+02 -6.24000000E+02 -1.16673000E+02  
8720 -1.52440000E+02 -6.24000000E+02 -6.31430000E+01
```

***DAMPING_GLOBAL**
Tire Bounces on the Ground and Damps Out


```
. . . in total, 1522 nodes defined  
. . .  
52040 2.444749625E+02 -7.51864725E+02 -2.79200000E+02  
52049 2.698749875E+02 -7.51864725E+02 -2.79200000E+02  
$  
$$$$$$$$$$$$$ Shell Elements  
$  
*ELEMENT_SHELL  
$ eid pid n1 n2 n3 n4  
8710 35 8719 8722 8723 8720  
. . .  
... in total, 96 shells defined  
. . .  
8949 36 8929 8932 8926 8924  
$  
$$$$$$$$$$$$$ Solid Elements  
$  
*ELEMENT_SOLID  
$ eid pid n1 n2 n3 n4 n5 n6 n7 n8  
50880 76 50315 52520 52902 52521 52362 52686 52950 52687  
. . .  
... in total, 534 solids defined  
. . .  
51588 76 53833 53962 53834 53423 53424 53835 53425 53689  
$  
$$$$$ Nodal Mass Elements  
$  
*ELEMENT_MASS  
$ eid nid mass  
8730 8730 10.0  
8746 8746 10.0  
$  
*END
```

*DAMPING_GLOBAL


Tire Bounces on the Ground and Damps Out

Results:

taurus g=d3plot
angle 1 rx -90
ry 45 rx 20 view

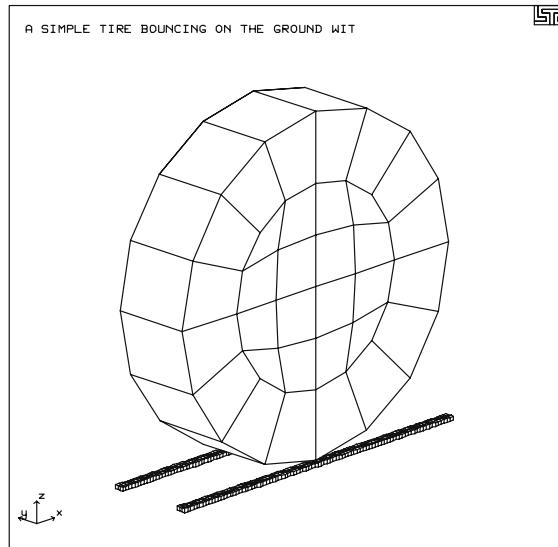

phs3 glstat
otxt Total and Damping Energy
oset 0 0.06 total over damping

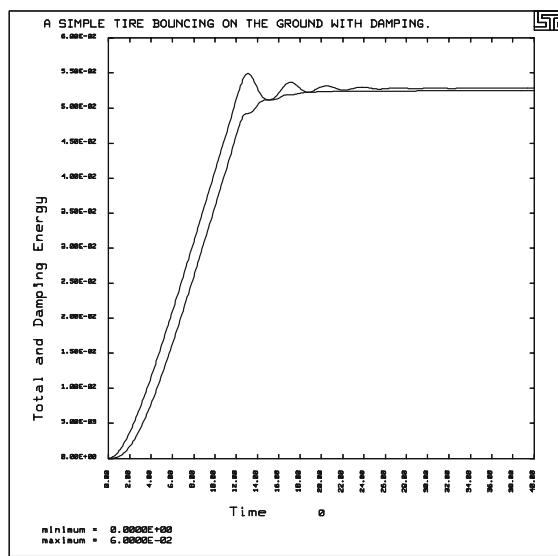

LS-DYNA Manual Section: *DEFORMABLE_TO_RIGID**Additional Sections:**

*BOUNDARY_SPC_NODE
*LOAD_BODY_Y
*RIGID_DEFORMABLE_R2D

Example: Interaction of Pendulums

Filenames: deformable_to_rigid.pendulum.k
deformable_to_rigid.pendulum.res

Execution lines:

```
ls940 i=deformable_to_rigid.pendulum.k
ls940 i=deformable_to_rigid.pendulum.res r=d3dump01
```

Description:

Two spheres are connected to wires to form two pendulums. One sphere is in a horizontal position with gravitational acceleration, base acceleration and is given an initial velocity in the vertical direction. The other sphere is in the vertical direction. The spheres are treated as rigid bodies while no contact or deformation occurs (i.e., when the horizontal pendulum swings down towards the vertical pendulum). The spheres are switched to deformable through a restart file so that they become flexible during contact.

Model:

Both spheres are modeled using shell elements. The pendulum wires are modeled using elastic beams. Automatic single surface contact is used during the impact phase.

Reference:

Reid, J.D.

*DEFORMABLE_TO_RIGID

Interaction of Pendulums

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Pendulum with 2 spheres colliding
$
$ LSTC Example
$
$ - uses *DEFORMABLE_TO_RIGID option to decrease execution time before impact
$
$ - one sphere is given an initial velocity (gravity alone just takes
$     too long for the pendulum to swing)
$
$
$ Last Modified: September 16, 1997
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endeng      endmas
      11.0          0          0.0          0.0          0.0
$
*CONTROL_CONTACT
$    slsfac      rwpnal      islchk      shlchk      penopt      thkchg      orien
$    usrstr      usrfrc      nsbcs      interm      xpene
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
      2            2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
      1            3
$
*CONTROL_SHELL
$    wrpang      itrinst      irnxx      istupd      theory      bwc      miter
      1
$
$
*DATABASE_BINARY_D3PLOT
$    dt      lcdt
      1.00
$
*DATABASE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
$    cmpflg      ieverp      beamip
      1
$
*DATABASE_BINARY_D3THDT
$    dt      lcdt
      999999
```

*DEFORMABLE_TO_RIGID

Interaction of Pendulums

```
$  
$  
*DATABASE_GLSTAT  
$      dt  
      0.10  
$  
*DATABASE_MATSUM  
$      dt  
  
      0.10  
$  
*DATABASE_NODOUT  
$      dt  
      0.10  
$  
*DATABASE_HISTORY_NODE  
$      id1      id2      id3  
      350       374       678       713  
$  
*DATABASE_RBDOUT  
$      dt  
      0.10  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Contacts - Sliding Interfaces  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*CONTACT_AUTOMATIC_SINGLE_SURFACE  
$      ssid      msid      sstyp      mstyp  
      0  
$      Equating ssid to zero means that all segments are included  
$  
$      fs      fd  
      0.08     0.08  
  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Gravity  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
*LOAD_BODY_Y  
$      lcid      sf      lciddr      xc      yc      zc  
      1      0.00981  
$  
*DEFINE_CURVE  
$      lcid      sidr      scla      sclo      offa      offo  
      1  
$      abscissa      ordinate  
$  
      0.00      1.000  
      10000.00     1.000  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
```

*DEFORMABLE_TO_RIGID

Interaction of Pendulums

```
$
$$$$ Boundary and Initial Conditions
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
$  
$$$$ Constrain translation of end points of beams
$  
*BOUNDARY_SPC_NODE
$      nid      cid      dofx      dofy      dofz      dofrx      dofry      dofrz
  45004        0          1          1          1          0          0          0
  45005        0          1          1          1          0          0          0
  45010        0          1          1          1          0          0          0
  45011        0          1          1          1          0          0          0
$  
$  
$$$$ The nodes within box 5 are given an initial velocity.
$  
*INITIAL_VELOCITY
$      nsid      nsidex      boxid
                  5
$  
$      vx      vy      vz      wx      wy      wz
  0.0     -12.0      0.0
$  
*DEFINE_BOX
$      boxid      xmm      xmx      ymn      ymx      zmn      zmx
      5     -120.0     -80.0      80.0     120.0     -30.0      30.0
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$$$$ Define Parts and Materials
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
$  
$$$$$$$ SPHERES
$  
*PART
$      pid      sid      mid      eosid      hgid      adpot
sphere1      1          1          1
sphere2      2          2          1
$  
$  
$$$$$ Materials
$  
$      Aluminum
$  
*MAT_PLASTIC_KINEMATIC
$      mid      ro      e      pr      sigy      etan      beta
      1    2.70e-6     68.9     0.330     0.286    0.00689
$      src      srp      fs
$  
$  
$$$$$ Sections
$  
$  
*SECTION_SHELL
```

*DEFORMABLE_TO_RIGID

Interaction of Pendulums

```

$      sid    elform      shrf      nip      propt      qr/irid      icomp
$      1          2
$      t1        t2      t3      t4      nloc
$      1.0        1.0      1.0      1.0
$      *SECTION_SHELL
$      sid    elform      shrf      nip      propt      qr/irid      icomp
$      2          2
$      t1        t2      t3      t4      nloc
$      1.0        1.0      1.0      1.0
$      *PART
$      pid      sid      mid      eosid      hgid      adpopt
Pendulum Wires - Elastic Beams
        45        45        45
$      *MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
        45    7.86e-6      210.0      0.30
$      *SECTION_BEAM
$      sid    elform      shrf      qr/irid      cst
        45        3      1.00000      1.0
$      res:      a      iss      itt      irr      sa
        10.0
$      *$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      $$$$$$ Deformable Switching
$      $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      *DEFORMABLE_TO_RIGID
$      pid      mrb
        1
$      *DEFORMABLE_TO_RIGID
$      pid      mrb
        2
$      *$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      $$$$$$ Define Nodes
$      $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      *NODE
$      node      x      y      z      tc      rc
        1   -1.08660250E+02  9.133975000E+01 -3.66025000E+00

```

*DEFORMABLE_TO_RIGID

Interaction of Pendulums

```
2 -1.09496480E+02 9.331914000E+01 -4.49648000E+00
3 -1.10108300E+02 9.545641000E+01 -5.10830000E+00
.
.     in total, 784 nodes defined
.
770 2.654228546E+01 -6.85637234E-01 1.355349000E+01
771 2.563811870E+01 1.747789010E+00 1.314240000E+01
772 2.445826961E+01 3.903858475E+00 1.250087000E+01
45004 5.000000000E+00 1.000000000E+02 -5.000000000E+01
45005 5.000000000E+00 1.000000000E+02 6.000000000E+01
45010 1.500000000E+01 1.000000000E+02 -5.000000000E+01
45011 1.500000000E+01 1.000000000E+02 6.000000000E+01
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$ Extra Nodes for Beams  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
45012 -8.83925000E+01 1.057467600E+02 -7.46760000E-01
45013 9.444594624E+00 8.495260182E+00 -1.11255000E+00
45014 -8.80996038E+01 9.496034978E+01 -7.46760000E-01
45015 1.816524677E+01 8.921481149E+00 -7.46760000E-01
45016 -8.80996068E+01 1.057467600E+02 1.003965322E+01
45017 9.446435484E+00 8.493592403E+00 1.104210976E+01
45018 -8.79698503E+01 9.483059027E+01 1.016940973E+01
45019 1.816697500E+01 8.920056610E+00 1.067986974E+01
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$$$ Define Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*ELEMENT_BEAM
$    eid      pid      n1      n2      n3
  45000      45      350     45004     45012
  45001      45      678     45010     45013
  45002      45      346     45004     45014
  45003      45      681     45010     45015
  45004      45      378     45005     45016
  45005      45      710     45011     45017
  45006      45      374     45005     45018
  45007      45      713     45011     45019
$  
*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
    1        1        1       10       11       2
    2        1        2       11       12       3
    3        1        3       12       13       4
.
.     in total, 768 shells defined
.
766      2      770      643      651      771
767      2      771      651      659      772
768      2      772      659      667      723
$  
*END
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$
```

*DEFORMABLE_TO_RIGID

Interaction of Pendulums


```
*KEYWORD
*TITLE
Pendulum with 2 spheres colliding
$ 
$ 
$$$$$  Restart
$ 
$  Last Modified: September 16, 1997
$ 
$  Units: mm, kg, ms, kN, GPa, kN-mm
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$$  Switch spheres to deformables
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*RIGID_DEFORMABLE_R2D
$      pid
      1
$ 
*RIGID_DEFORMABLE_R2D
$      pid
      2
$ 
$ 
$$$$$  Control Ouput
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*CONTROL_TERMINATION
$      ENDTIM      ENDCYC      DTMIN      ENDENG      ENDMAS
      13.0          0          0.0        0.0        0.0
$ 
$ 
$$$$$  Increase d3plot output frequency to capture deformation of impact better.
$ 
*DATABASE_BINARY_D3PLOT
$      dt      lcdn
      0.10
$ 
*END
```

*DEFORMABLE_TO_RIGID


Interaction of Pendulums

Results:

taurus g=d3plot
19
state 1 angle 1 vect v

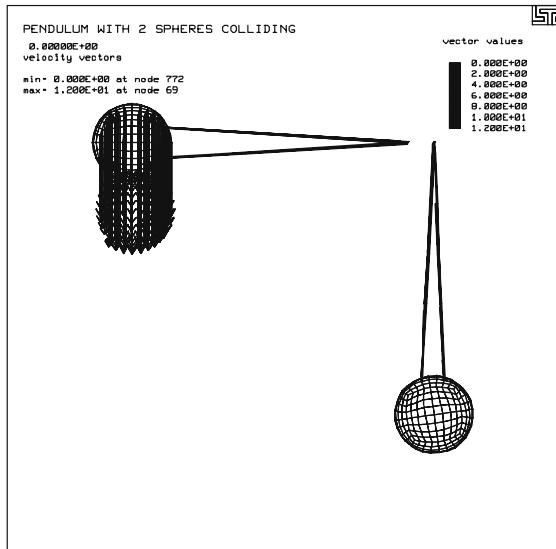

phs3
nodout
x-vel 374 713

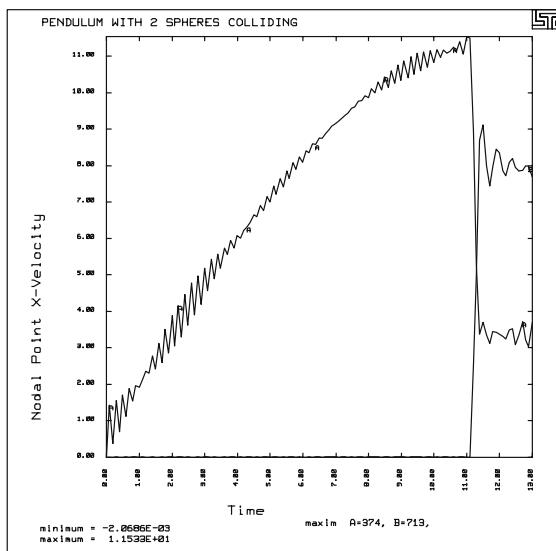

*INTEGRATION_SHELL

Cantilever Beam with Lobotto Integration

LS-DYNA Manual Section: *INTEGRATION_SHELL

Additional Sections:

*DAMPING_GLOBAL

*LOAD_NODE_POINT

Example: Cantilever Beam with Lobotto Integration

Filename: integration_shell.lobotto.beam.k

Description:

A cantilever beam has a concentrated load, and then the beam vibration critically damps. Lobotto integration rules place the quadrature points on the true surfaces of the shell. [See Hughes].

Model:

The plate measures $1.00 \times 0.10 \times 0.01$ in³ and is modeled with 60 Belytschko-Tsay shell elements. The displacement of the nodes is fixed at one end and a concentrated load is applied to the other end. Symmetry conditions for the plane strain case exist on the beam sides.

Input:

The concentrated loads and load curve definition 1 defines the load on the end of the beam (*LOAD_NODE_POINT, *DEFINE_CURVE). The beam is critically damped (*DAMPING_GLOBAL) The number of integration points is 5 (*SECTION_SHELL). The shell integration rule is the Lobotto integration rule (*SECTION_SHELL)

Results:

The displacement of the beam damps out critically. The x-stress values at the integration points exhibit tension on one side, compression on the opposite side, and balance at the neutral axis.

*INTEGRATION_SHELL

Cantilever Beam with Lobotto Integration

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Lobotto Integration
$
$ LSTC Example
$
$ Last Modified: September 17, 1997
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
        0.015
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
        2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
        0          0           0           0           0           2           1000
$
$
*DATABASE_BINARY_D3PLOT
$    dt        lcdn
        0.0003
$
*DATABASE_BINARY_D3THDT
$    dt        lcdn
        10.
$
*DATABASE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
        5
$    cmpflg     ieverp     beamip
$
*DATABASE_GLSTAT
$    dt
        0.0001
$
*DATABASE_ELOUT
$    dt
        0.0001
$
*DATABASE_HISTORY_SHELL
$    id1        id2        id3        id4        id5        id6        id7        id8
        1
$
*DATABASE_NODOUT
$    dt
        0.0001
```

*INTEGRATION_SHELL

Cantilever Beam with Lobotto Integration

```

$ *DATABASE_HISTORY_NODE
$     id1      id2      id3      id4      id5      id6      id7      id8
$         31
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$   Loading
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$   Load nodes 31, 62, 93 in the negative z-direction.
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *LOAD_NODE_POINT
$     nid      dof      lcid      sf      cid      m1      m2      m3
$     31       3        1 -1.00E+00
$     62       3        1 -1.00E+00
$     93       3        1 -1.00E+00
$ *DEFINE_CURVE
$     lcid      sidr      scla      sclo      offa      offo
$         1
$             a          o
$             0.000E+00    0.000E+00
$             8.000E-03   1.667E-03
$             1.534E-02  1.667E-03
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$   Damping
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *DAMPING_GLOBAL
$     lcid      valdmp
$         2        0.0
$ *DEFINE_CURVE
$     lcid      sidr      scla      sclo      offa      offo
$         2
$             a          o
$             0.000E+00    0.000E+00
$             8.000E-03   0.000E+00
$             1.000E-02   2.353E+03
$             1.534E-02  2.353E+03
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$   Define Parts and Materials
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *PART
$     pid      sid      mid      eosid      hgid      adpopt
Cantilever Beam - Aluminum

```

*INTEGRATION_SHELL

Cantilever Beam with Lobotto Integration

```
$  
$  
*MAT_PLASTIC_KINEMATIC  
$    mid      ro      e      pr      sigy      etan      beta  
$      1    7.85e-4  10.00e+6    0.300   20000.0    100000     1.0  
$    src      srp      fs  
$      0.0      0.0      0.0  
$  
$$$$ irid = -1 ==> integration rule 1 used (see below)  
$  
*SECTION_SHELL  
$    sid      elform      shrf      nip      propt      qr/irid      icomp  
$      1          0          5          -1  
$    t1      t2      t3      t4      nloc  
$      0.010     0.010     0.010     0.010  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Integration Rule  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*INTEGRATION_SHELL  
$    irid      nip      esop  
$      1          5  
$    s      wf      pid  
-1.000E+00 1.000E-01  
-6.546E-01 5.444E-01  
0.000E+00 7.111E-01  
6.546E-01 5.444E-01  
1.000E+00 1.000E-01  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
*NODE  
$    node      x      y      z      tc      rc  
$      1    0.000000E+00  0.000000E+00  0.000000E+00    7      7  
$      2    3.333334E-02  0.000000E+00  0.000000E+00    2      6  
$      3    6.666667E-02  0.000000E+00  0.000000E+00    2      6  
$  
$      ... in total, 93 nodes defined  
$  
$      91    9.333333E-01  1.000000E-01  0.000000E+00    2      6  
$      92    9.666666E-01  1.000000E-01  0.000000E+00    2      6  
$      93    1.000000E+00  1.000000E-01  0.000000E+00    2      6  
$  
$$$$ Shell Elements  
$  
*ELEMENT_SHELL  
$    eid      pid      n1      n2      n3      n4  
$      1          1          1          32          33          2  
$      2          1          2          33          34          3  
$      3          1          3          34          35          4  
$  
$      ... in total, 60 shells defined  
$  
58      1      59      90      91      60
```

***INTEGRATION_SHELL**
Cantilever Beam with Lobotto Integration

59	1	60	91	92	61
60	1	61	92	93	62


\$
*END

*INTEGRATION_SHELL


Cantilever Beam with Lobotto Integration

Results:

taurus g=d3plot
19
rx -90 s 50 udg 1 g

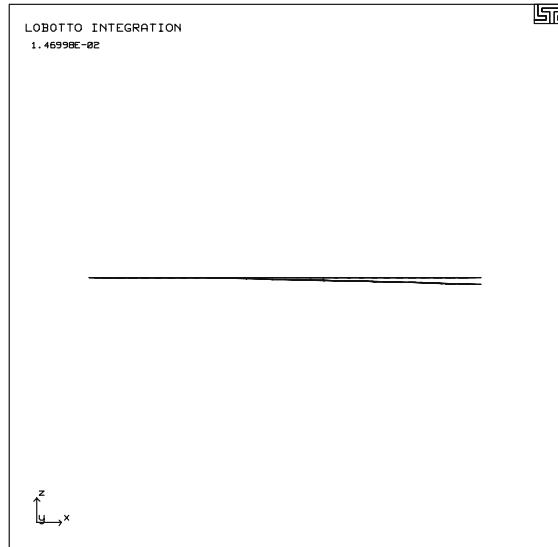

phs3
nodout
z-disp

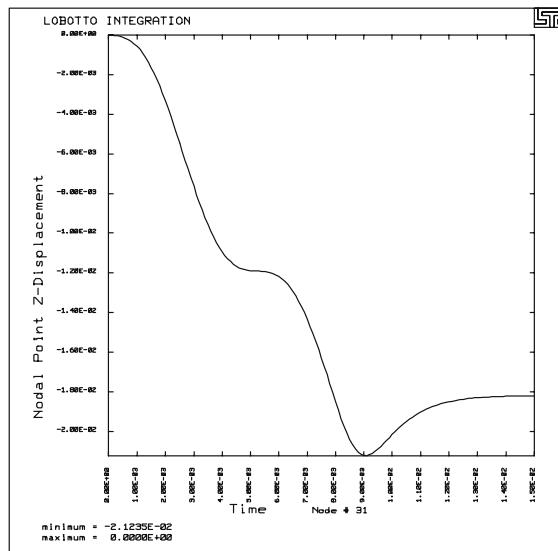

*INTERFACE_COMPONENT

An Interface File Controls the Response of a Cube

LS-DYNA Manual Section: *INTERFACE_COMPONENT

Additonal Sections:

*INITIAL_VELOCITY
*INTERFACE_LINKING_SEGMENT

Example: An Interface File Controls the Response of a Cube

Filenames: interface_component.cube.k
interface_component.cube.rk

Execution Line:

LS940 i=interface_component.cube.k z=d3iff

After completion, copy d3iff to a separate directory containing interface_component.cube.rk, then from that directory run:

LS940 i=interface_component.cube.rk l=d3iff

Description:

A cube, one solid element, strikes and rebounds from an elastic plate. In the first run, an interface file (d3iff) is created that contains the position of the bottom segment of the cube. In the second run, the cube mesh refinement increases from 1 element to 8 elements. The interface file is then used to control the position of the bottom of the new cube as if it underwent the same impact as the cube in run one..

Model:

The material of the cube and the plate are elastic. The plate, that measures $40 \times 40 \times 2$ mm³, is modeled with 16 Belytschko-Tsay shell elements . The cube has a side length of 10 mm and is initially positioned 10 mm above the plate. The cube is given an initial velocity towards the plate.

Reference:

Schweizerhof, K. and Weimer, K.

*INTERFACE_COMPONENT

An Interface File Controls the Response of a Cube

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
INTERFACE SEGMENTS (FIRST ANALYSIS)
$  
$ LSTC Example
$  
$ Last Modified: September 18, 1997
$  
$ Units: ton, mm, s, N, MPa, N-mm
$  
$$$$$ Control Ouput
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
     0.0003
$  
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
     2
$  
*CONTROL_HOURGLASS
$    ihq         qh
     4
$  
$$$$$ opifs - output interval for interface file
$  
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
           2.000E-6
$  
*CONTROL_TIMESTEP
$    dtinit      scft       isdo       tslimt      dtms       lctm       erode      ms1st
     0.10
$  
$  
*DATABASE_BINARY_D3PLOT
$    dt        lcdt
     0.00002
$  
*DATABASE_BINARY_D3THDT
$    dt        lcdt
     0.00001
$  
*DATABASE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
     1
$    cmpflg      ieverp      beamip
$  
*DATABASE_GLSTAT
$    dt
     0.00001
$  
*DATABASE_NODOUT
```

*INTERFACE_COMPONENT

An Interface File Controls the Response of a Cube

```

$      dt
  0.00001
$
*DATABASE_HISTORY_NODE
$      id1      id2      id3      id4      id5      id6      id7      id8
  101
$
*DATABASE_RCFORC

$      dt
  0.00001
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Interface
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$$
$$$$ Save the behavior on the following segment in the interface file.
$$$$ This file will then be used in the second analysis.
$
*INTERFACE_COMPONENT_SEGMENT
$      sid
  3
$
*SET_SEGMENT
$      sid      da1      da2      da3      da4
  3
$      n1      n2      n3      n4      a1      a2      a3      a4
  101     102     104     103
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Initial Velocity
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ All nodes in box 1 are given an initial velocity (nodes of the cube).
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*INITIAL_VELOCITY
$      nsid      nsindex      boxid
  1
$      vx      vy      vz
  0.0     0.0    -100000.0
$
*DEFINE_BOX
$      boxid      xmm      xmx      ymn      ymx      zmn      zmx
  1      15.0     25.0     15.0     25.0     10.0    20.0
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Contact - Sliding Interfaces
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$ Contact between the bottom of the cube (segment set 1) and the plate.

```

*INTERFACE_COMPONENT

An Interface File Controls the Response of a Cube

```
$
*CONTACT_SURFACE_TO_SURFACE
$    ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$        1          2
$        fs         fd          dc          vc          vdc       penchk      bt       dt
$        sfs        sfm         sst         mst         sfst       sfmt        fsf        vsf
$ 
$ *SET_SEGMENT
$    sid      da1      da2      da3      da4
$        1
$    n1       n2       n3       n4
$        101      103      104      102
$ 
$ *SET_SEGMENT
$    sid      da1      da2      da3      da4
$        2
$    n1       n2       n3       n4
$        7          8          13          12
$        8          9          14          13
$        12         13         18          17
$        13         14         19          18
$ 
$$$$$$ Define Parts and Materials
$ 
$$$$$$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*$PART
$    pid      sid      mid      eosid      hgid      adpopt
Plate      1          1          1
Cube      2          2          2
$ 
$ *MAT_ELASTIC
$    mid      ro      e      pr      da      db
$        1  2.00e-8  100000.0  0.300
$ 
$ *MAT_ELASTIC
$    mid      ro      e      pr      da      db
$        2  1.00e-8  100000.0  0.300
$ 
$ *SECTION_SHELL
$    sid      elform      shrf      nip      propt      qr/irid      icomp
$        1            0.83333      2.0      3.0
$        t1        t2        t3        t4      nloc
$        2.0        2.0        2.0        2.0
$ 
$ *SECTION_SOLID
$    sid      elform
$        2
$ 
$$$$$$ Define Nodes and Elements
```

*INTERFACE_COMPONENT

An Interface File Controls the Response of a Cube

```

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ *NODE
$   node           x           y           z       tc      rc
    1   0.000000E+00   0.000000E+00   0.000000E+00   7       0
    2   1.000000E+01   0.000000E+00   0.000000E+00   7       0
    3   2.000000E+01   0.000000E+00   0.000000E+00   7       0
    .
    ...  in total, 33 nodes defined
    .
    106   2.500000E+01   1.500000E+01   2.000000E+01   0       0
    107   1.500000E+01   2.500000E+01   2.000000E+01   0       0
    108   2.500000E+01   2.500000E+01   2.000000E+01   0       0
$ $$$$ Solid and Shell Elements
$ *ELEMENT_SOLID
$   eid   pid   n1   n2   n3   n4   n5   n6   n7   n8
    101     2   101   102   104   103   105   106   108   107
$ *ELEMENT_SHELL
$   eid   pid   n1   n2   n3   n4
    1       1       1       2       7       6
    2       1       2       3       8       7
    .
    ...  in total, 16 shell elements defined
    .
    15       1     18     19     24     23
    16       1     19     20     25     24
$ *END
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
*KEYWORD
*TITLE
INTERFACE SEGMENTS (SECOND ANALYSIS)
$ LSTC Example
$ - The only loading on this model comes from the interface file.
$ Last Modified: September 18, 1997
$ Units: ton, mm, s, N, MPa, N-mm
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Control Ouput
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *CONTROL_TERMINATION
$   endtim     endcyc     dtmin     endneg     endmas
          0.0003
$ *CONTROL_ENERGY

```

*INTERFACE_COMPONENT

An Interface File Controls the Response of a Cube

```
$      hgen      rwen      slnten      rylen
      2
$ *CONTROL_HOURGLASS
$      ihq      qh
      4
$ $$$$ opifs - output interval for interface file
$ *CONTROL_OUTPUT
$      npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
      0.002E-3
$ *CONTROL_TIMESTEP
$      dtinit      scft      isdo      tslimt      dtms      lctm      erode      ms1st
      0.10
$ *DATABASE_BINARY_D3PLOT
$      dt      lcdt
      0.00002
$ *DATABASE_BINARY_D3THDT
$      dt      lcdt
      0.00001
$ *DATABASE_EXTENT_BINARY
$      neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
      1
$      cmpflg      ieverp      beamip

$ *DATABASE_GLSTAT

$      dt
      0.00001
$ *DATABASE_NODOUT
$      dt
      0.00001
$ *DATABASE_HISTORY_NODE
$      id1      id2      id3      id4      id5      id6      id7      id8
      101      201      205
$ *DATABASE_RCFORC
$      dt
      0.00001
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$$ Interface
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ $$$$ Link the interface file to the following segments.
$ *INTERFACE_LINKING_SEGMENT
$      ssid      ifid
      3          1
$ *SET_SEGMENT
```

*INTERFACE_COMPONENT

An Interface File Controls the Response of a Cube

```

$      sid      da1      da2      da3      da4
      3
$      n1      n2      n3      n4      a1      a2      a3      a4
  201    202    205    204
  202    203    206    205
  204    205    208    207
  205    206    209    208
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Define Parts and Materials
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*PART
$      pid      sid      mid      eosid      hgid      adpopt
New Cube
      1      1      1
$
*MAT_ELASTIC
$      mid      ro      e      pr      da      db
      1    1.00e-8  100000.0    0.300
$
*SECTION_SOLID
$      sid      elform
      1
$
$$$$ Define Nodes and Elements
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
*NODE
$      node      x      y      z      tc      rc
  101    1.500000E+01    1.500000E+01    1.000000E+01    0      0
  102    2.500000E+01    1.500000E+01    1.000000E+01    0      0
.
...
...  in total, 31 nodes defined
.
.
  226    2.000000E+01    2.500000E+01    2.000000E+01    0      0
  227    2.500000E+01    2.500000E+01    2.000000E+01    0      0
$
$$$$$ Solid Elements
$
*ELEMENT_SOLID
$      eid      pid      n1      n2      n3      n4      n5      n6      n7      n8
  101      1    201    202    205    204    210    211    214    213
  102      1    202    203    206    205    211    212    215    214
  103      1    204    205    208    207    213    214    217    216
  104      1    205    206    209    208    214    215    218    217
  105      1    210    211    214    213    219    220    223    222
  106      1    211    212    215    214    220    221    224    223
  107      1    213    214    217    216    222    223    226    225
  108      1    214    215    218    217    223    224    227    226
$
*END


```

*INTERFACE_COMPONENT


An Interface File Controls the Response of a Cube

Results:

```
taurus g=d3plot  
19  
rz 20 rx -80 center v
```

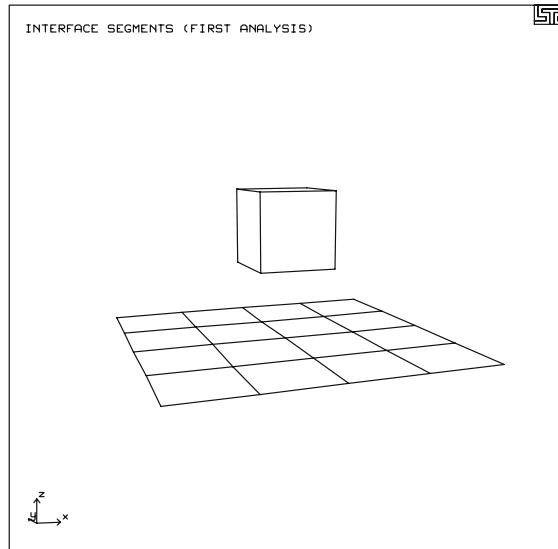

```
phs3  
nodout  
oset -1.5e5 1.0e5 z-vel 101
```

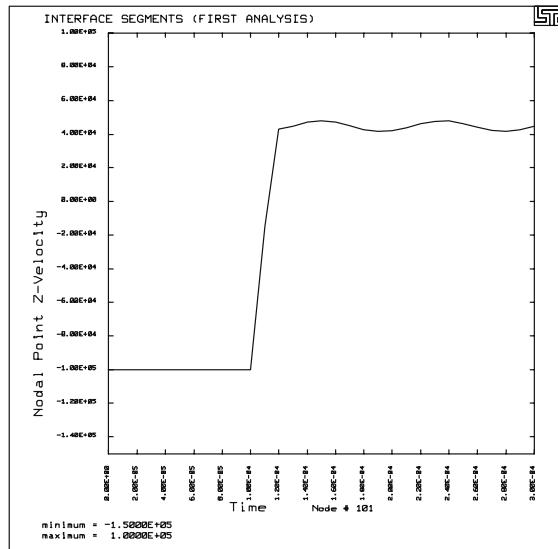


*INTERFACE_COMPONENT


An Interface File Controls the Response of a Cube

Results:

```
taurus g=d3plot  
19  
rz 20 rx -70 center v
```

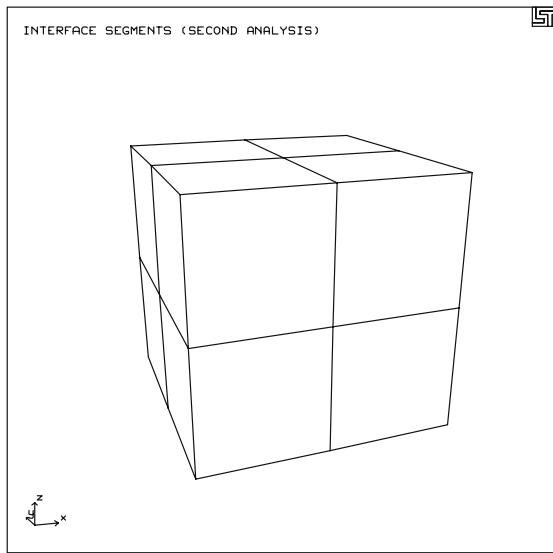

```
phs3  
nodout  
oset -1.5e5 1.0e5 z-vel 201
```

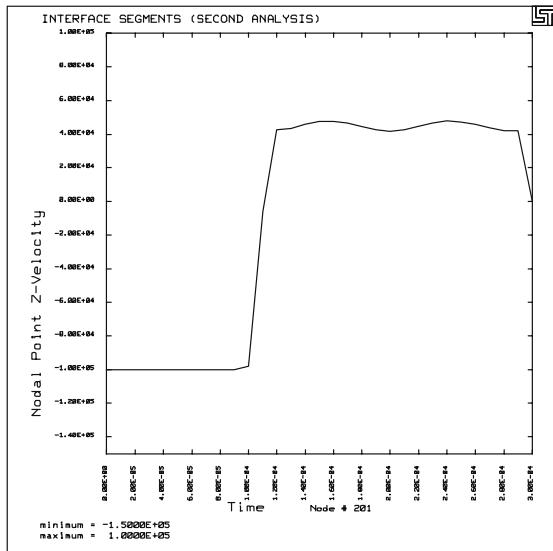

***INTERFACE_COMPONENT**

An Interface File Controls the Response of a Cube

*LOAD_BODY_GENERALIZED

Rotating Elements

LS-DYNA Manual Section: *LOAD_BODY_GENERALIZED

Additional Sections:

*BOUNDARY_PRESCRIBED_MOTION_NODE
*DATABASE_CROSS_SECTION_SET
*INITIAL_VELOCITY_NODE

Example: Rotating Elements

Filename: load_body.shell.k

Description:

A body has constant angular velocity. The radial vibration introduced due to the rapid deployment of the rotation is damped out in the initialization phase using dynamic relaxation.

Model:

The body measures $200 \times 100 \times 10$ mm³. The body consists of 2 Belytschko-Tsay elastic shell elements. The body rotates about the y-axis at 62.83 radians per second. The analysis ends at 0.1 seconds.

Input:

All nodes have an initial translational velocity based on the angular velocity $v=\omega \times r$. (*INITIAL_VELOCITY_NODE). Dynamic relaxation damps oscillations in the radial direction during the initialization (*LOAD_BODY_GENERALIZED, *DEFINE_CURVE). This essentially pre-stresses the structure and the load continues into the analysis portion. Because of the condition of constant angular velocity of the two nodes on the axis of rotation, the motion remains uniform throughout the calculation (*BOUNDARY_PRESCRIBED_MOTION_NODE). The section forces are available in the ASCII database file secforc (*DATABASE_SECFORC).

Reference:

Schweizerhof, K. and Weimer, K.

***LOAD_BODY_GENERALIZED**

Rotating Elements

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Mass with Angular Rotation - 2 Shell Elements
$ 
$ LSTC Example
$ 
$ Last Modified: September 18, 1997
$ 
$ Units: ton, mm, s, N, MPa, N-mm
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$$ Control Ouput
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*CONTROL_TERMINATION
$   endtim    endcyc      dtmin     endneg     endmas
       0.1
$ 
*CONTROL_HOURGLASS
$   ihq        qh
       4
$ 
$ 
*DATABSE_BINARY_D3PLOT
$   dt/cycl    lcdn
       10.00E-03
$ 
*DATABSE_BINARY_D3THDT
$   dt/cycl    lcdn
       0.50E-03
$ 
*DATABSE_ELOUT
$   dt
       0.001
$ 
*DATABSE_HISTORY_SHELL
$   id1        id2        id3        id4        id5        id6        id7        id8
       1           2
$ 
*DATABSE_GLSTAT
$   dt
       0.001
$ 
*DATABSE_NODOUT
$   dt
       0.001
$ 
*DATABSE_HISTORY_NODE
$   id1        id2        id3        id4        id5        id6        id7        id8
       1           2           3           4           5           6
$ 
*DATABSE_SECFORC
$   dt/cycl    lcdn
       0.001
$ 

*DATABSE_CROSS_SECTION_SET
```

***LOAD_BODY_GENERALIZED**
Rotating Elements

```

$      nsid      hsid      bsid      ssid      tsid      dsid
      1          1          1          1          1          1
$  

*SET_NODE_LIST  

$      sid      da1      da2      da3      da4
      1
$      nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
      1          2
$  

*SET_SHELL_LIST  

$      sid      da1      da2      da3      da4
      1
$      eid1      eid2      eid3      eid4      eid5      eid6      eid7      eid8
      1
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$$$$ Initial Velocity
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  

*INITIAL_VELOCITY_NODE  

$      nid      vx      vy      vz      vxe      vye      vze
      1          0.0     0.0     0.0     0.00    62.83    0.00
      2          0.0     0.0     0.0     0.00    62.83    0.00
      3          0.0     0.0   -6283.0     0.00    62.83    0.00
      4          0.0     0.0   -6283.0     0.00    62.83    0.00
      5          0.0     0.0  -12566.0     0.00    62.83    0.00
      6          0.0     0.0  -12566.0     0.00    62.83    0.00
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$$$$ Boundary Conditions
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  

*BOUNDARY_PRESCRIBED_MOTION_NODE  

$      nid      dof      vad      lcid      sf      vid
      1          6          0          1        1.0
      2          6          0          1        1.0
$  

*DEFINE_CURVE  

$      lcid      sidr      scla      sclo      offa      offo
      1
$  

$      abscissa      ordinate
      0.000      62.83
      1.000      62.83
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$$$$ Loading
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  

*LOAD_BODY_GENERALIZED

```

*LOAD_BODY_GENERALIZED

Rotating Elements


```
$      n1      n2      lcid      drlcid      xc      yc      zc
$      1       6       0       2       0.0      0.0      0.0
$      ax      ay      az      omx      omy      omz
$      0.0     0.0     0.0     0.0     1.0     0.0
$
*$DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
$      2       1
$      abscissa      ordinate
$      0.000      62.83
$      1.000      62.83
$
$$$$$ Define Parts and Materials
$
$$$$$ Define Nodes and Elements
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*PART
$      pid      sid      mid      eosid      hgid      adopt
shells
$      1       1       1
$
$
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
$      1     1.00e-08    210000.    0.300
$
$
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
$      1
$      t1      t2      t3      t4      nloc
$      10.0     10.0     10.0     10.0
$
$$$$$ Define Elements
$
*$NODE
$      node      x      y      z      tc      rc
$      1     0.000000E+00    0.000000E+00    0.000000E+00    7      0
$      2     0.000000E+00    1.000000E+02    0.000000E+00    6      0
$      3     1.000000E+02    0.000000E+00    0.000000E+00    0      0
$      4     1.000000E+02    1.000000E+02    0.000000E+00    0      0
$      5     2.000000E+02    0.000000E+00    0.000000E+00    0      0
$      6     2.000000E+02    1.000000E+02    0.000000E+00    0      0
$
*$ELEMENT_SHELL
$      eid      pid      n1      n2      n3      n4
$      1       1       1       3       4       2
$      2       1       3       5       6       4
$
*$END
```

*LOAD_BODY_GENERALIZED


Rotating Elements

Results:

taurus g=d3plot
19
ytran -80 rx 40 ndplt s 3 over vect velo

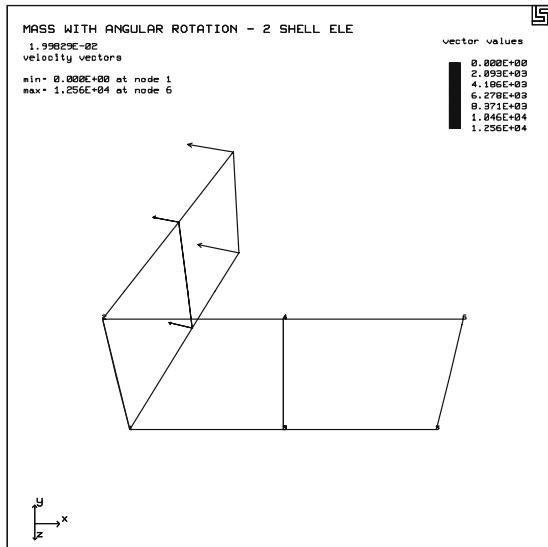

phs3
nodout
grid oset -1.4e4 1.4e4 x-vel 2 4 6

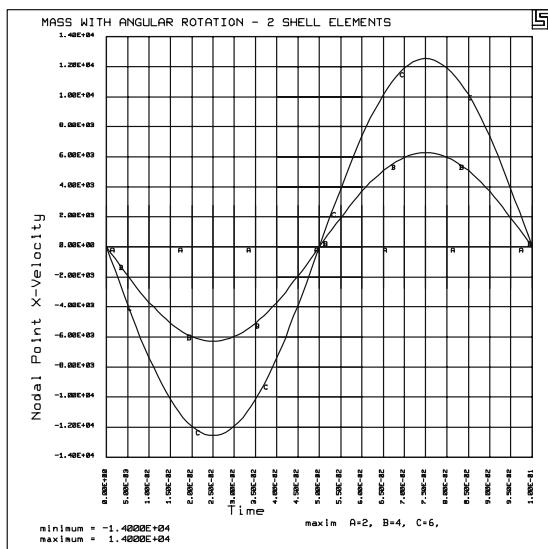

***LOAD_BODY_GENERALIZED**

Rotating Elements

***LOAD_BODY_Z**

Tire Under Gravity Loading Bounces on a Rigid Wall

LS-DYNA Manual Section: *LOAD_BODY_Z

Additional Sections:

*RIGIDWALL_PLANAR

Example: Tire Under Gravity Loading Bounces on a Rigid Wall

Filename: load_body.gravity.k

Description:

A simple model of a tire is placed under gravity loaded and bounces on a rigid wall.

Model:

A positive gravity constant of 0.00981 mm/ms^2 is used to make the tire drop in the negative z-direction. A *RIGIDWALL_PLANAR keyword is used to define the ground. Nodes on the bottom of the tire are prevented from penetrating the rigid wall by specifying them within the *RIGIDWALL_PLANAR command (using a *SET_NODE_COLUMN keyword).

Results:

The rigid wall forces oscillate about the steady state, which is the weight of the tire ($W = 0.26 \text{ kN}$). Curiously, the tire damps out even though no damping is specified within the model. See the example in *DAMPING_GLOBAL for an explanation and fix.

*LOAD_BODY_Z

Tire Under Gravity Loading Bounces on a Rigid Wall

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
A simple tire bouncing on the ground.
$
$ LSTC Example
$
$ Last Modified: October 10, 1997
$
$ --- GRAVITY CHECK ---
$
$ steady state is reached around 150 ms
$ m = 26.5534 kg ==> W = 0.26 kN
$ Damping oscillations around s.s., which is 0.26 kN (from RWFORC file)
$ Nodes demonstrate bouncing off ground (NODOUT)
$
$ Gravity modeled successfully using load curve and
$     BASE ACCELERATION IN Z-DIRECTION - Body Load in Z
$
$ Note: The acceleration is in the negative z-direction even though
$     all values needed to define acc. are positive.
$
$ * Shells (1 mm thick)
$ * Mild steel (with strain rate effect)
$ * Part 35 - wheel
$ * Part 36 - tire
$ * 2 discrete masses (10 kg each) at center of wheel to obtain proper weight
$ * Gap between tire and ground = 0.2 mm
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endeng      endmas
      150.01          0          0.0          0.0          0.0
$
*CONTROL_ENERGY
$    hgen        rwen      slnten      rylen
      2            2
$
$
*DATABASE_BINARY_D3PLOT
$      dt      lcdt
      10.0
$
*DATABASE_BINARY_D3THDT
$      dt      lcdt
      999999
$
*DATABASE_GLSTAT
$      dt
      0.2
$
*DATABASE_MATSUM
```

***LOAD_BODY_Z**
Tire Under Gravity Loading Bounces on a Rigid Wall

```

$      dt
$      0.2
$ *DATABASE_NODOUT
$      dt
$      0.2
$ *DATABASE_HISTORY_NODE

$      id1      id2      id3      id4      id5      id6      id7      id8
$      8914     8746     8918
$ *DATABASE_RWFORC
$      dt
$      0.2
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$   Gravity
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *LOAD_BODY_Z
$      lcid      df      lciddr      xc      yc      zc
$      1 9.810E-03
$ *
$ *DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
$      1
$      abscissa      ordinate
$      0.00      1.000
$      1000.00      1.000
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$   Rigid Wall - The Ground
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *RIGIDWALL_PLANAR
$      nsid      nsidex      boxid
$      1          0          0
$      xt      yt      zt      xh      yh      zh      fric
$      0.0      0.0     -279.2      0.0      0.0     -279.0      1.0
$ *
$ *SET_NODE_COLUMN
$      sid
$      1
$      nid
$      8901
$      8904
$      8911
$      8912

```

*LOAD_BODY_Z

Tire Under Gravity Loading Bounces on a Rigid Wall

```
8913
8914
8919
8920
8921
8922
$#####
$##### Define Parts and Materials
$#####
$##### Materials
$#####
*MAT_PIECEWISE_LINEAR_PLASTICITY
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      mid      ro      e       pr      sigy      etan      eppf      tdel
$      1 0.783E-05 200.0   0.3     0.207
$ Cowper/Symonds Strain Rate Parameters
$      C       p       lcss     lcsr
$      40      5
$ Plastic stress/strain curves
$      0.000    0.080    0.160    0.400    1.000
$      0.207    0.250    0.275    0.290    0.300
$#####
$#####
$##### Sections
$#####
*SECTION_SHELL
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      sid      elform    shrf      nip      proptr    qr/irid    icomp
$      1         2          3.0000
$      t1        t2        t3        t4        nloc
$      1.00     1.00     1.00     1.00
$#####
$#####
$##### Define Nodes and Elements
$#####
$#####
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$#####
*NODE
$      nid      x           y           z       tc       rc
$      8719 -1.16673000E+02 -6.24000000E+02 -1.16673000E+02      0         0
$      8720 -1.52440000E+02 -6.24000000E+02 -6.31430000E+01      0         0
$      ...
$      ... in total, 82 nodes defined
```

***LOAD_BODY_Z**
Tire Under Gravity Loading Bounces on a Rigid Wall


```
. 8931 2.790000000E+02 -7.54000000E+02 0.000000000E+00      0      0
 8932 2.577620000E+02 -7.54000000E+02 1.067690000E+02      0      0
$ $$$$$$$$$ Shell Elements
$ *ELEMENT_SHELL
$   eid      pid      n1      n2      n3      n4
  8710      35      8719      8722      8723      8720
  8711      35      8720      8723      8724      8721
.
... in total, 96 shells defined
.
 8948      36      8928      8931      8932      8929
 8949      36      8929      8932      8926      8924
$ $$$$$$$$$ Nodal Mass Elements
$ *ELEMENT_MASS
$   eid      nid      mass
  8730      8730      10.0
  8746      8746      10.0
$ *END
```

*LOAD_BODY_Z


Tire Under Gravity Loading Bounces on a Rigid Wall

Results:

taurus g=d3plot
angle 1 rx -90
ry 45 rx 20 view

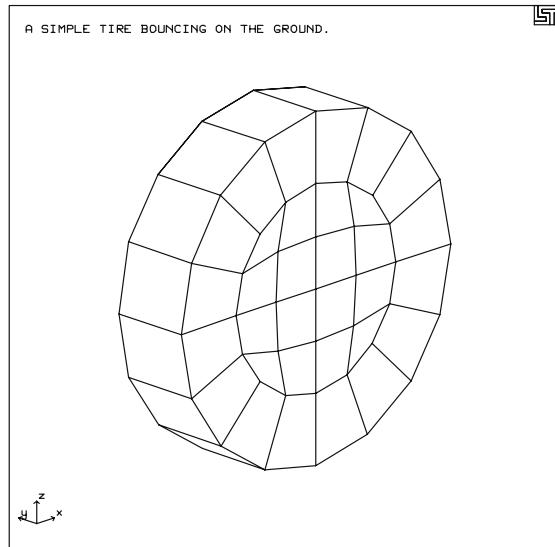

phs3
rwforc
normal

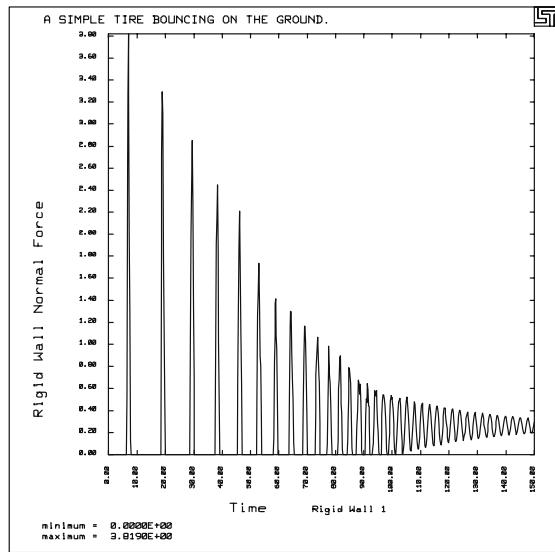

***MAT_FRAZER_NASH_RUBBER_MODEL**
Frazer-Nash Single Element

LS-DYNA Manual Section: *MAT_FRAZER_NASH_RUBBER_MODEL

Example: Frazer-Nash Single Element

Filename: mat_fn_rubber.element.k

Description:

This model illustrates the behavior of the Frazer Nash rubber model using a single element.

Model:

The example contains a single element which measures $7.5 \times 7.5 \times 100$. The element is constrained in the z-direction on the bottom and has prescribed velocity on the top surface.

Input:

Unitary input for any constant indicates least squares curve fitting. (*MAT_FRAZER_NASH_RUBBER). The least squares curve fit requires specimen dimensions and a stress-strain load curve. The model provides the option to stop the calculation based on maximum and minimum strain values.

Results:

The compressibility of the element and the pressure versus average strain are shown in the plots..

References:

Kenchington, D. C.

*MAT_FRAZER_NASH_RUBBER_MODEL

Frazer-Nash Single Element

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Test for Frazer-Nash Material Model
$
$ LSTC Example
$
$ Last Modified: September 18, 1997
$
$ Units: kg, mm, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
        20.0
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
        2
$
*CONTROL_HOURGLASS
$    ihq         qh
        1         0.05
$
*CONTROL_TIMESTEP
$    dtinit      tssfac      isdo       tslimt      dt2ms       lctm       erode      ms1st
        5.000E-01
$
*
*$DATABASE_BINARY_D3PLOT
$    dt          lcdt
        0.1
$
*$DATABASE_BINARY_D3THDT
$    dt          lcdt
        0.1
$
*$DATABASE_ELOUT
$    dt
        0.1
$
*$DATABASE_HISTORY_SOLID
$    id1        id2        id3        id4        id5        id6        id7        id8
        1
$
*$DATABASE_GLSTAT
$    dt
        0.1
$
*$DATABASE_MATSUM
$    dt
        0.1
$
*$DATABASE_NODOUT
```

*MAT_FRAZER_NASH_RUBBER_MODEL

Frazer-Nash Single Element

```

$      dt
      0.1
$
*DATABASE_HISTORY_NODE
$      id1        id2        id3        id4        id5        id6        id7        id8
      1
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Boundary Conditions - Prescribed Motion
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*BOUNDARY_PRESCRIBED_MOTION_NODES
$      nid      dof      vad      lcid      sf      vid
      1        4        2        1 4.000E-02      1
      2        4        2        1 4.000E-02      1
      3        4        2        1 4.000E-02      1
      4        4        2        1 4.000E-02      1
$
*DEFINE_VECTOR
$      vid      xt      yt      zt      xh      yh      zh
      1 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00-1.000E+00
$
*DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
      1
$      abscissa      ordinate
      0.00000000E+00 0.00000000E+00
      2.00000000E+00 7.13000011E+00
      4.00000000E+00 1.35200005E+01
      6.00000000E+00 1.86100006E+01
      8.00000000E+00 2.18700008E+01
      1.00000000E+01 2.30000000E+01
      1.20000000E+01 2.18700008E+01
      1.40000000E+01 1.86100006E+01
      1.60000000E+01 1.35200005E+01
      1.80000000E+01 7.13000011E+00
      2.00000000E+01 0.00000000E+00
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Define Parts and Materials
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*PART
$      pid      sid      mid      eosid      hgid      adpopt
Rubber
      1        1        1
$
$
*MAT_FRAZER_NASH_RUBBER_MODEL
$      mid      ro      pr      c100      c200      c300      c400
      1 1.254E-06    0.495 1.000E+00 0.000E+00
$
$      c110      c210      c010      c020      exit      emax      emin
      1.000E+00 0.000E+00 1.000E+00 1.000E+00 1.000E+00 9.000E-01-9.000E-01

```

*MAT_FRAZER_NASH_RUBBER_MODEL

Frazer-Nash Single Element


```
$
$      sgl      sw      st      lcid
1.000E+00 1.000E+00 1.000E+00          2
$ 
$ 
*SECTION_SOLID
$      sid      elform
        1          0
$
$$$$ Force versus actual change in guage length for F_N rubber model.
$
*DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
        2
$      abscissa      ordinate
0.00000000E+00 0.00000000E+00
6.07299991E-03 3.59800004E-04
1.24500003E-02 6.25399989E-04
1.88100003E-02 8.85999994E-04
2.53199991E-02 1.24600006E-03
3.11200004E-02 1.71500002E-03
3.71199995E-02 2.40099989E-03
4.32099998E-02 3.35399993E-03
4.92900014E-02 4.59800009E-03
5.42900003E-02 5.86300017E-03
5.93000017E-02 7.36099994E-03
6.43299967E-02 9.10999998E-03
6.94399998E-02 1.11400001E-02
7.27799982E-02 1.26200002E-02
7.60900006E-02 1.41899996E-02
7.94499964E-02 1.59000009E-02
8.28600004E-02 1.77500006E-02
8.40499997E-02 1.84300002E-02
8.52300003E-02 1.91099998E-02
8.64199996E-02 1.98199991E-02
8.76099989E-02 2.05400009E-02
1.08700001E+00 2.01999998E+00
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$ 
$      Define Nodes and Elements
$ 
$ 
*NODE
$      node      x      y      z      tc      rc
1 7.500000000E+00 0.000000000E+00 1.000000000E+01 0 0
2 7.500000000E+00 7.500000000E+00 1.000000000E+01 0 0
3 0.000000000E+00 7.500000000E+00 1.000000000E+01 0 0
4 0.000000000E+00 0.000000000E+00 1.000000000E+01 0 0
5 7.500000000E+00 0.000000000E+00 0.000000000E+00 3 0
6 7.500000000E+00 7.500000000E+00 0.000000000E+00 3 0
7 0.000000000E+00 7.500000000E+00 0.000000000E+00 3 0
8 0.000000000E+00 0.000000000E+00 0.000000000E+00 3 0
$
*ELEMENT_SOLID
$      eid      pid      n1      n2      n3      n4      n5      n6      n7      n8
1 1 5 6 7 8 1 2 3 4
$
*END
```

*MAT_FRAZER_NASH_RUBBER_MODEL


Frazer-Nash Single Element

Results:

taurus g=d3plot
19
rx -90 angle 1 dist 1000 udg 1 state 101 view

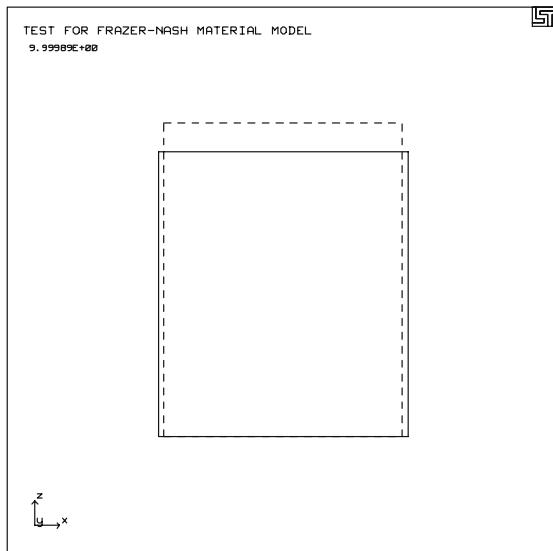

phs2
element 1 1 gather
grid aset -7e-3 0 e2hist 8 308 1 1

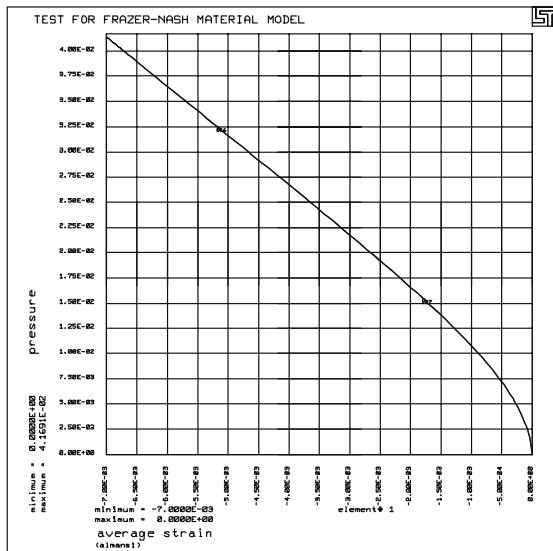

***MAT_FRAZER_NASH_RUBBER_MODEL**

Frazer-Nash Single Element

*MAT_PIECEWISE_LINEAR_PLASTICITY

Piecewise Linear Plasticity Fragmenting Plate

LS-DYNA Manual Section: *MAT_PIECEWISE_LINEAR_PLASTICITY

Example: Piecewise Linear Plasticity Fragmenting Plate

Filename: mat_piecewise_linear.plate-shatter.k

Description:

A plate of 1,200 Belytschko-Tsay shell elements strikes a wall at an angle of 45 degrees from the wall normal. The impact velocity is 20,775 in/sec. and the termination time is 0.00025 seconds.

Model:

The material description contains Young's Modulus, Poisson's ratio, yield stress, hardening modulus, ultimate plastic strain, and time step size for element deletion.

Input:

One material definition for a Belytschko-Tsay shell with viscous hourglass control (*CONTROL_HOURGLASS). Young's Modulus, Poisson's ratio, yield stress and the hardening modulus are 16 Msi, 0.35, 155,000 psi, and 192,000 psi respectively. (*MAT_LINEAR_PIECEWISE_PLASTICITY). The plastic strain at failure is 32% and the failure minimum time step size is 0.3 microseconds.

Results:

The plate deforms away from the stonewall and the plate fragments.

*MAT_PIECEWISE_LINEAR_PLASTICITY

Piecewise Linear Plasticity Fragmenting Plate

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Test for Material 24 with Failure
$
$ LSTC Example
$
$ Last Modified: September 18, 1997
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
  2.500E-04          5.000E-02
$
*CONTROL_CONTACT
$    slsfac      rwpnal      islchk      shlthk      penopt      thkchg      orien
  0.01
$    usrstr      usrfac      nsbcs      interm      xopenen
$
*CONTROL_HOURGLASS
$    ihq        qh
  4
$
*DATABSE_BINARY_D3PLOT
$    dt/cycl      lcdt
  1.250E-05
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Initial Conditions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$ All nodes except nodes in node set 1 are given an initial velocity.
$$$$ Node set 1 contains the nodes of the wall.
$
*INITIAL_VELOCITY
$    nsid      nsidex      boxid
  1
$
$      vx        vy        vz        vxr        vyr        vzc
-1.469E+04 -1.469E+04  0.000E+00  0.000E+00  0.000E+00  0.000E+00
$
$      vxr       vye       vze       vxre       vyre       vzre
$
*SET_NODE_LIST
$    sid
  1
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
  1282      1283      1284      1285
```

*MAT_PIECEWISE_LINEAR_PLASTICITY

Piecewise Linear Plasticity Fragmenting Plate

```

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Contacts - Sliding Interfaces
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *CONTACT_SURFACE_TO_SURFACE
$     ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$       1          3          2          3          sboxid      mboxid      spr      mpr
$     fs         fd         dc         vc         vdc        penchk      bt       dt
$     0.3        0.3
$     sfs        sfm        sst        mst        sfst        sfmt      fsf       vsf
$ 
$ *SET_PART_LIST
$     sid
$       1
$     pid1      pid2      pid3
$       1          2
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Define Parts and Materials
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *PART
$     pid      sid      mid      eosid      hgid      adpopt
plate
$       1          1          1
plate-tip
$       2          1          1
wall
$       3          1          1
$ 
$ *MAT_PIECEWISE_LINEAR_PLASTICITY
$     mid      ro      e      pr      sigy      etan      eppf      tdel
$       1 4.1408E-4  16.00e+6    0.35  155000.  192000.  0.32  0.03e-6
$     c         p      lcss      lcsr
$ 
$     eps1      eps2      eps3      eps4      eps5      eps6      eps7      eps8
$     es1       es2       es3       es4       es5       es6       es7       es8
$ 
$ *SECTION_SHELL
$     sid      elform      shrf      nip      propt      qr/irid      icomp
$       1          0          5          3          0
$     t1       t2       t3       t4      nloc
$     0.125     0.125     0.125     0.125
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Define Nodes and Elements
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$ Nodes 1282, 1283, 1284, 1285 are fixed - nodes of the wall.
$ 

```

*MAT_PIECEWISE_LINEAR_PLASTICITY


Piecewise Linear Plasticity Fragmenting Plate

```
*NODE
$    node          x          y          z      tc      rc
  1    0.000000E+00  0.000000E+00  0.000000E+00  0        0
  .
  ...  in total, 1285 nodes defined
  .
  1285  -5.000000E-02  -1.000000E+01  5.000000E+00    7        7
$
$$$$$  Shell Elements
$
*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
  1        2       22       1       2       23
  .
  ...  in total, 1201 shells defined
  .
  1201      3     1282     1283     1284     1285
$
*END
```


***MAT_PIECEWISE_LINEAR_PLASTICITY**
Piecewise Linear Plasticity Fragmenting Plate

Results:

taurus g=d3plot
19
ry -30 dist 12 view

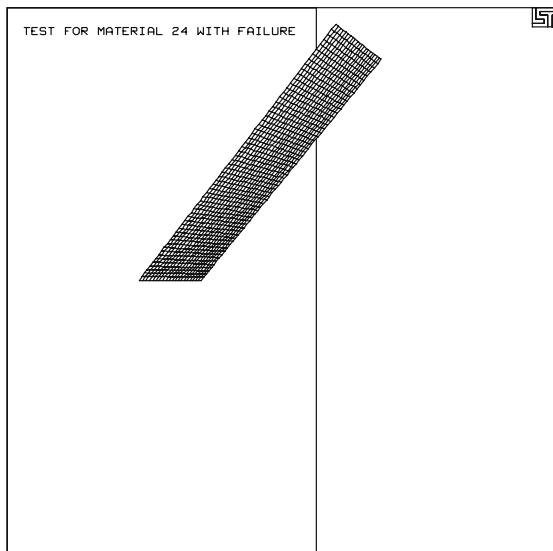

state 21
view

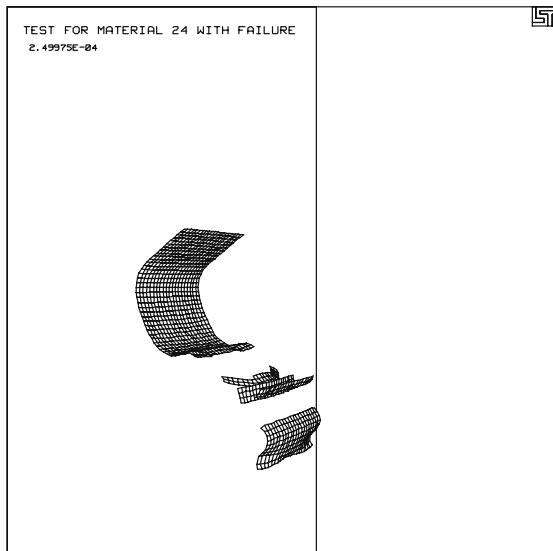

***MAT_PIECEWISE_LINEAR_PLASTICITY**
Piecewise Linear Plasticity Fragmenting Plate

***MAT_RIGID**
Rigid Sliding Block in Local Coordinate System

LS-DYNA Manual Section: *MAT_RIGID

Additonal Sections:

*DEFINE_COORDINATE_VECTOR
*LOAD_SEGMENT

Example: Rigid Sliding Block in Local Coordinate System

Filename: mat_rigid.block-slide.k

Description:

A center of mass is constrained to slide along a local coordinate system. The termination time is 0.010 seconds.

Model:

The material description references a local coordinate system to constrain the rigid block. The rigid block is free to translate along the local z axis.

Input:

The material definition is a rigid material (*MAT_RIGID). The material specifies the use of a local coordinate system, the local coordinate constraint value of 100111 (tx ty tz rx ry rz), and the local coordinate system for output. The local coordinate system specifies that the local origin is the global origin, the local x-axis point is (1.0,0.0,1.0) and the local y-axis point is (0.0,0.0,1.0) (*DEFINE_COORDINATE_VECTOR).

A shell element is defined in order to control the timestep.

Results:

The block slides along the local coordinate system.

*MAT_RIGID

Rigid Sliding Block in Local Coordinate System

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Sliding Block
$
$ LSTC Example
$
$ Last Modified: September 18, 1997
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
  1.000E-02
$
*DATABSE_BINARY_D3PLOT
$      dt      lcdt
  5.000E-04
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Define Parts and Materials
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*PART
$      pid      sid      mid      eosid      hgid      adoptp
block        1          1          1
plate        2          2          2
$
$
*MAT_RIGID
$      mid      ro      e      pr      n      couple      m      alias
  1  7.85e-04  30.00e+06  0.300
$
$      cmo      con1      con2
  -1.0      1.0      100111
$
$      lco/a1      a2      a3      v1      v2      v3
  1.0
$
*DEFINE_COORDINATE_VECTOR
$      cid      xt      yt      zt      xh      yh      zh
  1  1.000E+00  0.000E+00  1.000E+00  0.000E+00  0.000E+00  1.000E+00
$
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
  2  7.85e-04  30.00e+06  0.300
$
```

***MAT_RIGID**
Rigid Sliding Block in Local Coordinate System

```

$*
*SECTION_SOLID
$    sid      elform
      1          0
$*
*SECTION_SHELL
$    sid      elform      shrf      nip      propt      qr/irid      icomp
      2
$    t1        t2        t3        t4      nloc
      1.0       1.0       1.0       1.0
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$  Loading
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
*LOAD_SEGMENT
$    lcid      sf      at      n1      n2      n3      n4
      1 1.000E+00 0.000E+00      53      49      50      54
      1 1.000E+00 0.000E+00      57      53      54      58
      1 1.000E+00 0.000E+00      61      57      58      62
      1 1.000E+00 0.000E+00      54      50      51      55
      1 1.000E+00 0.000E+00      58      54      55      59
      1 1.000E+00 0.000E+00      62      58      59      63
      1 1.000E+00 0.000E+00      55      51      52      56
      1 1.000E+00 0.000E+00      59      55      56      60
      1 1.000E+00 0.000E+00      63      59      60      64
$*
*DEFINE_CURVE
$    lcid      sidr      scla      sclo      offa      offo
      1
$    abscissa      ordinate
      0.000E+00      1.000E+02
      1.000E-02      1.000E+02
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$  Define Nodes and Elements
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
*NODE
$    node      x      y      z      tc      rc
      1 0.000000E+00 0.000000E+00 0.000000E+00 0 0
      2 3.333333E-01 0.000000E+00 0.000000E+00 0 0
      3 6.666667E-01 0.000000E+00 0.000000E+00 0 0
      .
      ... in total, 68 nodes defined
      .
      66 1.000000E+00 0.000000E+00 -1.000000E+00 0 0
      67 0.000000E+00 1.000000E+00 -1.000000E+00 0 0
      68 1.000000E+00 1.000000E+00 -1.000000E+00 0 0
$*
$$$$  Solid Elements
$*
*ELEMENT_SOLID
$    eid      pid      n1      n2      n3      n4      n5      n6      n7      n8

```

*MAT_RIGID


Rigid Sliding Block in Local Coordinate System

```
 1      1      1      2      6      5      17     18      22     21
 2      1      2      3      7      6      18     19      23     22
 3      1      3      4      8      7      19     20      24     23
 .
 . .   ... in total, 27 solids defined
 .
 25      1      41      42      46      45      57      58      62      61
 26      1      42      43      47      46      58      59      63      62
 27      1      43      44      48      47      59      60      64      63
$
$$$$$ Shell Element - used to control the timestep
$
*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
      1        2       65       67       68       66
*END
```


***MAT_RIGID**
Rigid Sliding Block in Local Coordinate System

Results:

taurus g=d3plot
19
m 1 udg 1 rx -90 state 8 view

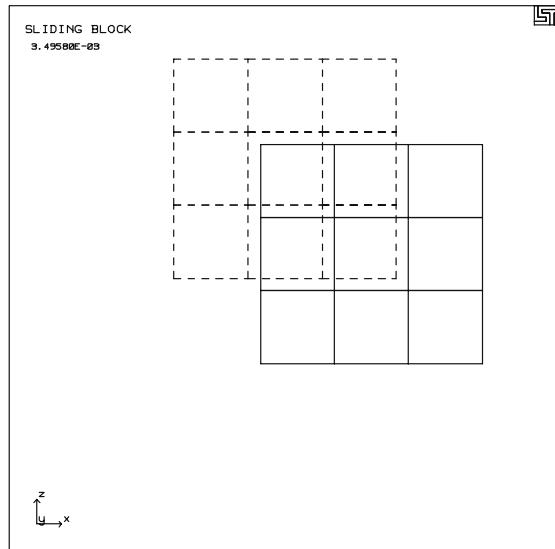

state 11
view

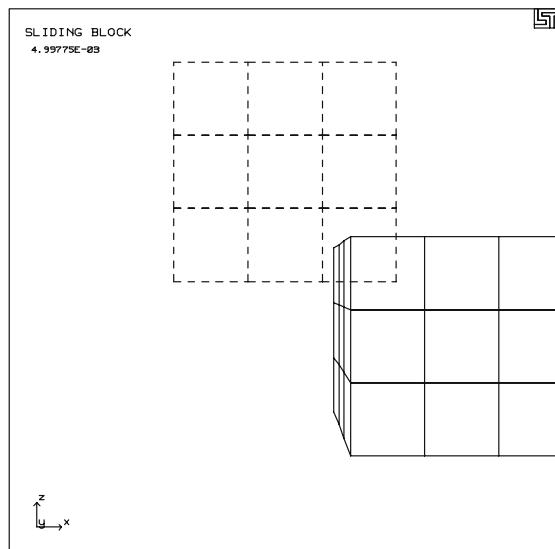

***MAT_RIGID**

Rigid Sliding Block in Local Coordinate System

***MAT_SOIL_AND_FOAM**
Soil and Foam Single Element

LS-DYNA Manual Section: *MAT_SOIL_AND_FOAM

Example: Soil and Foam Single Element

Filename: mat_soil_foam.element.k

Description:

This problem contains a single element with one degree of freedom on a side. The element compresses and expands.

Model:

The element measures 100 cubic inches. One side follows a velocity curve which results in a range of relative volume (V/V_0) 1.000 to 0.0091 to 1.441.

Input:

The foam follows a pressure volumetric strain relationship (*MAT_SOIL_AND_FOAM). The unloading behavior may follow either the unloading bulk modulus or the loading curve. The unloading in the first case follows the bulk modulus, while the unloading in the second case follows the loading curve. The material has a cutoff pressure of 0.5.

Results:

The plots show the element pressure versus time.

*MAT_SOIL_AND_FOAM

Soil and Foam Single Element

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Foam Material Model for a Single Element
$
$ LSTC Example
$ Last Modified: September 18, 1997
$
$ This problem contains a single element with one degree of
$ freedom on a single side. The element compresses and expands
$ following a prescribed velocity motion.
$ The material is a foam which follows a pressure volumetric
$ strain relationship. The foam block is compressed and
$ expanded in a range of relative volume (V/V0) from 1.0
$ to 0.0091 to 1.441.
$
$ Two types of unloading are explored:
$ 1. Unloading follows the loading curve
$ 2. Bulk unloading modulus is used - volumetric crushing
$
$ The foam has a tensile fracture pressure cutoff of 0.5
$
$ Units: lbf-s2/in, in, s, lbf, psi, lbf-in
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
      0.250
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
      2          2
$
*DATABASE_BINARY_D3PLOT
$    dt/cycl     lcdt
      0.005
$
*DATABASE_BINARY_D3THDT
$    dt/cycl     lcdt
      0.001
$
*DATABASE_GLSTAT
$    dt/cycl     lcdt
      0.005
$
*DATABASE_ELOUT
$    dt/cycl     lcdt
      0.005
$
*DATABASE_HISTORY_SOLID
      1
$$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Boundary Motion Conditions
```

***MAT_SOIL_AND_FOAM**
Soil and Foam Single Element

```
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*BOUNDARY_PRESCRIBED_MOTION_SET
$      nid      dof      vad      lcid      sf      vid
      1          3          0          1      1.0          0
$
*DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
      1
$          abscissa      ordinate
          0.000E+00      -9.000E+02
          1.000E-01      -9.000E+02
          1.010E-01      9.000E+02
          2.500E-01      9.000E+02
$
*SET_NODE_LIST
$      sid
      1
$      nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
      5          6          7          8
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      Define Parts and Materials
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*PART
$      pid      sid      mid      eosid      hgid      adpopt
foam block
      1          1          1
$
*MAT_SOIL_AND_FOAM
$      mid      ro      bulk      g      a0      a1      a2      pc
      1      6.740E-11      5.760E+01      1.794E+01      1.200E-01      0.000E+00      0.000E+00-5.000E-01
$      f          f
$      vcr      dun
$
$      Unloading follows the loading curve
$      1.000E+00      0.000E+00
$
$      Bulk unloading modulus is used - volumetric crushing
      0.000E+00      0.000E+00
$
$      eps1      eps2      eps3      eps4      eps5      eps6      eps7      eps8
-2.500E-02-5.000E-02-1.050E-01-3.570E-01-6.930E-01-9.160E-01-1.200E+00-1.610E+00
$
$      eps9      eps10
      0.000E+00      0.000E+00
$
$      p1      p2      p3      p4      p5      p6      p7      p8
      3.450E-01      5.170E-01      6.890E-01      8.070E-01      1.110E+00      1.240E+00      1.300E+00      1.500E+00
$
$      p9      p10
      0.000E+00      0.000E+00
$
*SECTION_SOLID
$      sid      elform
      1
```

*MAT_SOIL_AND_FOAM


Soil and Foam Single Element

```
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*NODE  
$ node x y z tc rc  
1 0.000000E+00 0.000000E+00 0.000000E+00 7 7  
.  
... in total, 8 nodes defined  
.  
8 1.000000E+02 1.000000E+02 1.000000E+02 4 7  
$  
*ELEMENT_SOLID  
$ eid pid n1 n2 n3 n4 n5 n6 n7 n8  
1 1 1 2 4 3 5 6 8 7  
$  
*END
```


*MAT_SOIL_AND_FOAM Soil and Foam Single Element

Results:

Volumetric Crushing
taurus g=d3plot
19
phs2 elem 1 1 gather grid oset -1 2 etime 8 1 1

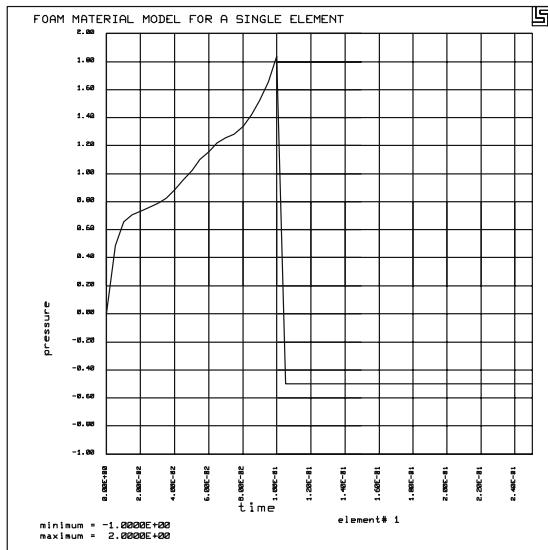

Unloading Follows Loading Curve
taurus g=d3plot
phs2
elem 1 1 gather grid oset -1 2 etime 8 1 1

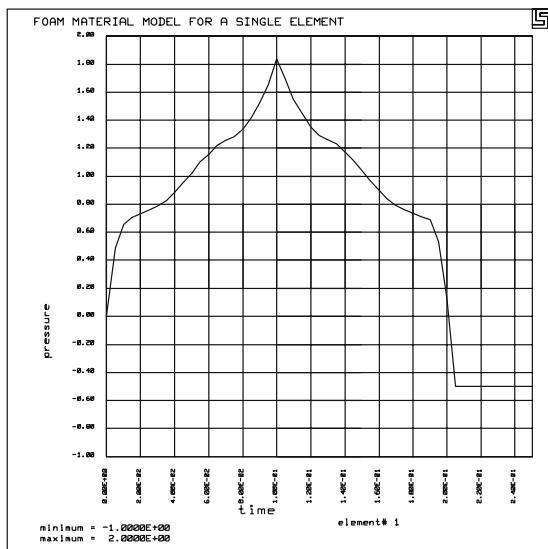

***MAT_SOIL_AND_FOAM**
Soil and Foam Single Element

***MAT_SPRING**
Belted Dummy with Springs

LS-DYNA Manual Section: *MAT_SPRING

Additional Sections:

```
*CONSTRAINED_EXTRA_NODES_SET  
*CONSTRAINED_JOINT_SPHERICAL  
*CONTACT_SURFACE_TO_SURFACE  
*DEFINE_SD_ORIENTATION  
*ELEMENT_DISCRETE  
*LOAD_BODY_Z  
*MAT_DAMPER_VISCOUS  
*PART_INERTIA
```

Example: Belted Dummy with Springs

Filename: mat_spring.belted-dummy.k

Description:

This is a simulation of the interaction between a dummy and seating system. The dummy has an initial velocity, base vehicle acceleration, and decelerated base.

Model:

The dummy consists of 15 ellipsoidal rigid bodies connected through cylindrical joints, springs and dampers. The base of the seat belts and the seat decelerates backwards relative to the dummy.

Input:

The dummy consists of rigid bodies 1 through 15. Materials 16 through 20 define the seat and material 21 and 22 define the seat belt. The rigid bodies are constrained with respect to each other with spherical joints (*CONSTRAINED_JOINT_SPHERICAL). Discrete springs and dampers between the rigid body provide the relative stiffness and viscosity. The initial velocity of all nodes is 14.8 units, while the acceleration of the seat and belt ends follow an acceleration curve in the opposite direction.

Results:

LS-DYNA predicts that the dummy slides under the seat belts.

Reference:

Stillman, D. W.

*MAT_SPRING

Belted Dummy with Springs

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Belted Dummy
$
$ LSTC Example
$
$ Last Modified: September 19, 1997
$
$ Units: kg, m, s, N, Pa, Joule
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$ endtim    endcyc      dtmin     endneg     endmas
 1.200E-01
$
*CONTROL_CONTACT
$ slsfac    rwpnal     islchk     shlthk     penopt     thkchg     orien
                           2
$ usrstr    usrfac     nsbcs      interm     xpenen
$
*CONTROL_TIMESTEP
$ dtinit    scft       isdo       tslimt     dtms       lctm       erode     ms1st
 0.000E+00 8.000E-01      0 0.000E+00 0.000E+00          0          0
$
$
*DATABASE_BINARY_D3PLOT
$ dt/cycl   lcdt
 2.500E-03
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Initial Conditions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$ All nodes are given an initial velocity.
$
*INITIAL_VELOCITY
$ nsid      nsidex     boxid
 0
$
$      vx        vy        vz        vxr       vyr       vzs
 1.480E+01 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Boundary Conditions
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
```

***MAT_SPRING**
Belted Dummy with Springs

```

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
$$$$ The base of the seat decelerates backwards relative to the dummy.
$
*BOUNDARY_PRESCRIBED_MOTION_SET
$    nsid      dof      vad      lcid      sf      vid
        1          1          1         50     -1.00       1
$
*SET_NODE_LIST
$    sid      da1      da2      da3      da4
        1
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
    1763      1764      1765      1766      1767      1768      1769      1770
    1771      1772      1773      1774      1775      1776      1777      1778
    1779      1780      1781      1782      1783      1784      1785      1786
    1787      1788      1789      1792      1795      1904      1906      1908
    1909      1910      1997      1998      1999      2043
$
*DEFINE_CURVE
$    lcid      sidr      scla      sclo      offa      offo
        50
$          abscissa          ordinate
    0.00000000E+00    0.00000000E+00
    4.00000019E-03    4.41500015E+01
    6.00000005E-03    2.94300003E+01
    9.99999978E-03    7.84800034E+01
    1.35000004E-02    4.41500015E+01
    1.79999992E-02    1.37300003E+02
    2.34999992E-02    1.66800003E+02
    3.09999995E-02    2.35399994E+02
    3.40000018E-02    2.35399994E+02
    3.59999985E-02    2.55100006E+02
    3.99999991E-02    2.60000000E+02
    4.19999994E-02    2.60000000E+02
    4.45000008E-02    2.69799988E+02
    4.69999984E-02    2.60000000E+02
    4.89999987E-02    2.60000000E+02
    5.15000001E-02    2.55100006E+02
    5.40000014E-02    2.55100006E+02
    7.99999982E-02    1.22599998E+02
    9.00000036E-02    4.90499992E+01
    9.49999988E-02    -9.81000042E+00
    9.74999964E-02    -2.45300007E+01
    1.03000000E-01    1.47200003E+01
    1.08999997E-01    -1.47200003E+01
    1.15000002E-01    -9.81000042E+00
    1.19499996E-01    -4.90999985E+00
    1.12499997E-01    -9.81000042E+00
    1.29999995E-01    -2.45000005E+00
    1.41000003E-01    -1.96200008E+01
    1.49000004E-01    -2.45000005E+00
    1.51999995E-01    -1.47200003E+01
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Gravity
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*LOAD_BODY_Z

```

*MAT_SPRING

Belted Dummy with Springs

```
$      lcid      sf      lciddr
      51      1.00      0
$
*DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
      51
$      abscissa      ordinate
      0.00000000E+00      9.81
      1.51999995E-01      9.81
$
$$$$$ Contacts - Sliding Interfaces
$      $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      $$$$$ The segment sets associated with these contacts are located at the end
$      $$$$ of this file.
$
*CONTACT_SURFACE_TO_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
      1          2          0          0
$      fs          fd          dc          vc          vdc      penchk      bt          dt
      6.200E-01
$      sfs         sfm         sst         mst         sfst        sfmt       fsf         vsf
$
*CONTACT_SURFACE_TO_SURFACE
$      ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
      3          4          0          0
$      fs          fd          dc          vc          vdc      penchk      bt          dt
      6.200E-01
$      sfs         sfm         sst         mst         sfst        sfmt       fsf         vsf
$
*CONTACT_SURFACE_TO_SURFACE
      5          6          0          0
      6.200E-01
$
*CONTACT_SURFACE_TO_SURFACE
      7          8          0          0
      8.000E-01
$
*CONTACT_SURFACE_TO_SURFACE
      9          10         0          0
      1.000E+00
$
*CONTACT_SURFACE_TO_SURFACE
      11         12         0          0
      8.000E-01
$
*CONTACT_SURFACE_TO_SURFACE
      13         14         0          0
      8.800E-01
$
```

***MAT_SPRING**
Belted Dummy with Springs

```

*CONTACT_SURFACE_TO_SURFACE
    15      16      0      0
  8.800E-01

$ 
*CONTACT_SURFACE_TO_SURFACE
    17      18      0      0
  1.600E-01

$ 
*CONTACT_SURFACE_TO_SURFACE
    19      20      0      0
  8.800E-01

$ 
*CONTACT_SURFACE_TO_SURFACE
    21      22      0      0
  0.000E+00

$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$  Constraints
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*CONSTRAINED_JOINT_SPHERICAL
$      n1      n2      n3      n4      n5      rps      damp
  99      227      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  228      405      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  406      865      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  866      971      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  407      537      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  538      685      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  408      603      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  604      763      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  972     1097      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  1098     1497      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  1498     1645      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  973     1317      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  1318     1579      0      0      0      0      0.000E+00
*CONSTRAINED_JOINT_SPHERICAL
  1580     1733      0      0      0      0      0.000E+00
$ 
$ 
*CONSTRAINED_EXTRA_NODES_SET
$      pid      nsid
  1          2

```

*MAT_SPRING

Belted Dummy with Springs

```
$
*SET_NODE_LIST
$      sid
      2
$      nid1      nid2      nid3      nid4      nid5
      99        100       101       102
$      .
      .
      .      in total, 15 extra_nodes_set & set_node_list pairs defined
      .

$      .
*CONSTRAINED_EXTRA_NODES_SET
$      pid      nsid
      2        3
$      .
*SET_NODE_LIST
$      sid
      3
$      nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
      227       228       229       230       231       232       233       234
$      .
$      .
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$      .
$      .
$      .      Define Spring Orientation Vectors and Curves
$      .
$      .
$      .
$      .      $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      .
$      .
*DEFINE_SD_ORIENTATION
$      vid      iop      xt      yt      zt      nid1      nid2
      1        2 0.000E+00 0.000E+00 0.000E+00      100       229
      2        2 0.000E+00 0.000E+00 0.000E+00      101       230
      3        2 0.000E+00 0.000E+00 0.000E+00      102       231
      .
      .      in total, 42 sd_orientation vectors defined
      .
      .
      .
      40        2 0.000E+00 0.000E+00 0.000E+00      1584      1734
      41        2 0.000E+00 0.000E+00 0.000E+00      1585      1735
      42        2 0.000E+00 0.000E+00 0.000E+00      1586      1736
$      .
$      .
$      .      Define Curves
$      .
*DEFINE_CURVE
$      lcid      sidr      scla      sclo      offa      offo
      1
$      abscissa          ordinate
      -1.71000004E+00   -5.38000000E+02
      -7.09999979E-01   -8.47500000E+01
      -6.80000007E-01   -7.76600037E+01
      -6.60000026E-01   -7.10599976E+01
      -5.89999974E-01   -5.36800003E+01
      -5.00000000E-01   -4.05800018E+01
      -3.89999986E-01   -2.99799995E+01
      -2.09999997E-02   -4.65000010E+00
      0.00000000E+00    0.00000000E+00
      2.09999997E-02   4.65000010E+00
      3.89999986E-01   2.99799995E+01
      5.00000000E-01   4.05800018E+01
      5.89999974E-01   5.36800003E+01
```

***MAT_SPRING**
Belted Dummy with Springs

```

6.60000026E-01      7.10599976E+01
6.80000007E-01      7.76600037E+01
7.09999979E-01      8.47500000E+01
1.71000004E+00      5.38000000E+02
$  

.  

...    load curves 2-48 also defined here  

.  

$  

*DEFINE_CURVE  

$    lcid      sidr      scla      sclo      offa      offo  

    49  

$        abscissa          ordinate  

    -1.00000000E+03     -1.00000000E+00  

    -5.00000000E-01     -1.00000000E+00  

    5.00000000E-01      1.00000000E+00  

    1.00000000E+03     1.00000000E+00
$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$$$$ Define Parts and Materials  

$  

$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  

$  

$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  

*PART_INERTIA  

material type # (rigid)  

$    pid      sid      mid      eosid      hgid      adpopt  

    1         1         1         0  

$    xc       yc       zc       tm       ircs  

-1.739E-01 0.000E+00 6.523E-01 4.535E+00  

$    ixx      ixy      ixz      iyy      iyz      izz  

1.590E-02 0.000E+00 1.424E-04 2.400E-02 0.000E+00 2.210E-02  

$    vtx      vty      vtz      vrz      vry      vrz  

1.480E+01 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00
$  

.  

...    part_inertia pid's 2-15 also defined here  

.  

$  

*PART_INERTIA  

material type # (rigid)  

15      15      15      0  

7.873E-01-7.999E-02-1.021E-01 1.250E+00  

1.000E-02 0.000E+00 0.000E+00 1.000E-02 0.000E+00 1.000E-02  

1.480E+01 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00
$  

$  

*PART  

$    pid      sid      mid      eosid      hgid      adpopt  

material type # 1 (elastic)  

16      16      16      0  

material type # 1 (elastic)  

17      17      17      0  

material type # 1 (elastic)  

18      18      18      0  

material type # 1 (elastic)  

19      19      19      0  

material type # 1 (elastic)  

20      20      20      0  

part-21  

21      21      21      0

```

*MAT_SPRING

Belted Dummy with Springs

```
part-22
      22      22      22      0
spring 101
      101     101     101
$.
.      ... spring pid's 102-207 also defined here
$.
spring 208
      208     208     208
$.
$$$$$$$$ Materials
$.
$.
$$$$ Rigid Materials
$.
*MAT_RIGID
$      mid      ro      e      pr      n      couple      m      alias
      1 4.064E+03 4.000E+08 3.000E-01 0.000E+00 0.000E+00 0.000E+00
0.000E+00 0.000E+00 0.000E+00
0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00
$.
.      ... mat_rigid mid's 2-14 also defined here
$.
*MAT_RIGID
$      mid      ro      e      pr      n      couple      m      alias
      15 2.000E+03 4.000E+08 3.000E-01 0.000E+00 0.000E+00 0.000E+00
0.000E+00 0.000E+00 0.000E+00
0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00
$.
$.
$$$$ Elastic Materials
$.
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
      16 4.646E+03 4.000E+08 3.000E-01
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
      17 4.646E+03 4.000E+08 3.000E-01
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
      18 4.646E+03 4.000E+09 3.000E-01
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
      19 4.646E+03 4.000E+08 3.000E-01
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
      20 2.000E+03 4.100E+08 3.000E-01
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
      21 2.000E+03 4.100E+08 3.000E-01
*MAT_ELASTIC
$      mid      ro      e      pr      da      db      k
      22 4.000E+03 2.000E+08 3.000E-01
$.
$.
$$$$ Nonlinear Elastic Spring Materials
$.
*MAT_SPRING_NONLINEAR_ELASTIC
```

***MAT_SPRING**
Belted Dummy with Springs

```
          101      1
$ .
. . . mat_spring_nonlinear_elastic mid's 101-142 also defined here
.
$ *MAT_SPRING_NONLINEAR_ELASTIC
    142      42
$ $
$ $$$$ Viscous Damper Materials
$ *
*MAT_DAMPER_VISCOUS
    143 2.300E+00
$ .
. . . mat_damper_viscous mid's 143-184 also defined here
.
$ *MAT_DAMPER_VISCOUS
    184 1.000E+00
$ $
$ $$$$ Nonlinear Viscous Damper Materials
$ *
*MAT_DAMPER_NONLINEAR_VISCOUS
    185      43
$ .
. . . mat_damper_nonlinear_viscous mid's 185-208 also defined here
.
$ *MAT_DAMPER_NONLINEAR_VISCOUS
    208      49
$ $
$ $$$$$$ Sections
$ $
$ $$$$ Shell Sections
$ *
*SECTION_SHELL
$     sid      elform      shrf      nip      propt      qr/irid      icomp
        1          0 0.000E+00 0.000E+00 0.000E+00
$     t1        t2      t3      t4      nloc
    1.000E-02 1.000E-02 1.000E-02 1.000E-02 0.000E+00
$ .
. . . shell sid's 2-21 also defined here
.
$ *
*SECTION_SHELL
$     sid      elform      shrf      nip      propt      qr/irid      icomp
        22         0 0.000E+00 0.000E+00 0.000E+00
    1.000E-02 1.000E-02 1.000E-02 1.000E-02 0.000E+00
$ .
$ $$$$ Spring-Damper Sections
$ *
*SECTION_SPRING-DAMPER
    101      1 0.000E+00 0.000E+00 0.000E+00 0.000E+00
```

*MAT_SPRING

Belted Dummy with Springs

```
0.000E+00 0.000E+00
$  
.  
    ... spring-damper sid's 102-207 also defined here  
.  
$  
*SECTION_DISCRETE  
 208      1 0.000E+00 0.000E+00 0.000E+00 0.000E+00  
0.000E+00 0.000E+00  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*NODE  
$  node          x                  y                  z      tc      rc  
  1-2.416931689E-01-3.286990896E-02 5.876007080E-01 0        0  
  2-2.475307435E-01-1.784761623E-02 5.820254087E-01 0        0  
  3-2.498186529E-01-1.089885016E-03 5.798402429E-01 0        0  
.     ... in total, 2043 nodes defined  
.     .  
  2041-5.439429283E-01 2.696031034E-01 6.014695168E-01 0        0  
  2042-5.649484396E-01 2.777405977E-01 6.089934111E-01 0        0  
  2043-5.859540105E-01 2.858780622E-01 6.165173650E-01 5        0  
$  
$$$$ Shell Elements  
$  
*ELEMENT_SHELL  
$  eid    pid    n1    n2    n3    n4  
  1      1      1      4      5      2  
  2      1      2      5      6      3  
  3      1      4      7      8      5  
.     ... in total, 1950 shells defined  
.     .  
  1948      22      394      357      365      403  
  1949      22      403      365      367      404  
  1950      22      404      367      369      379  
$  
$$$$ Discrete Elements  
$  
*ELEMENT_DISCRETE  
$  eid    pid    n1    n2    vid      s      pf      offset  
  1      101     1     129      1 0.00000000E+00 1  
  2      102     1     129      2 0.00000000E+00 1  
  3      103     1     129      3 0.00000000E+00 1  
.     ... in total, 108 discrete elements defined  
.     .  
  106      206     1505     1675      41 0.00000000E+00 1  
  107      207     1505     1675      42 0.00000000E+00 1  
  108      208     1505     1675      40 0.00000000E+00 1  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Segment sets for the contacts defined previously.  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
```

***MAT_SPRING**
Belted Dummy with Springs


```
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*SET_SEGMENT  
$      sid      da1  
      1          4  
$      n1       n2       n3       n4  
  1780      1783      1784      1781  
  1783      1786      1787      1784  
  1781      1784      1785      1782  
  1784      1787      1788      1785  
.  
...  in total, 22 segment sets defined for the contacts  
.  
$  
*END
```

***MAT_SPRING**


Belted Dummy with Springs

Results:

taurus g=d3plot
19
rx -90 center view

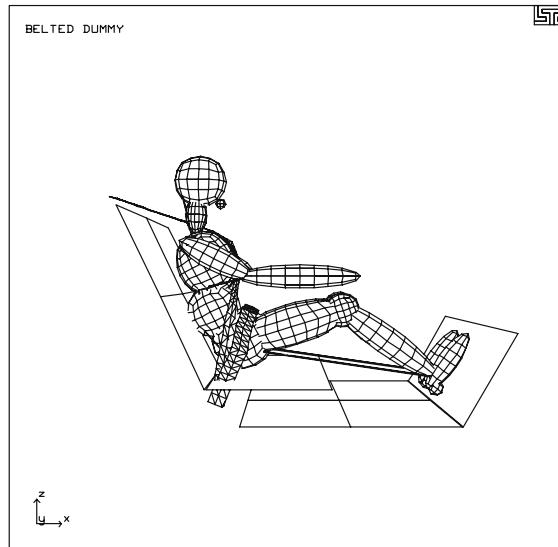

state 49
center
view

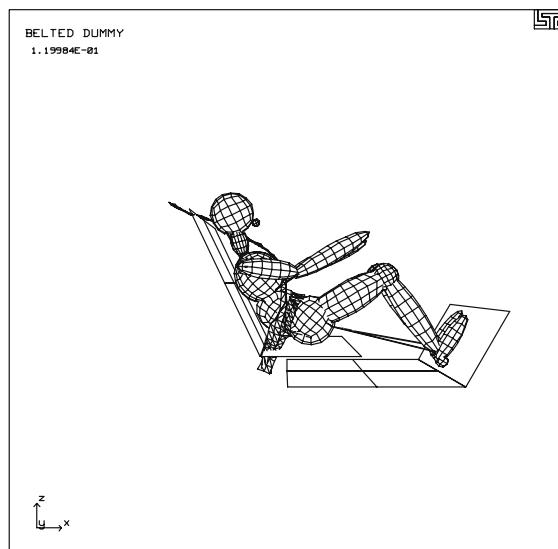

*MAT_TRANSVERSELY_ANISOTROPIC

Rectangular Cup Drawing

LS-DYNA Manual Section: *MAT_TRANSVERSELY_ANISOTROPIC

Additional Sections:

*CONTACT_ONE WAY_SURFACE_TO_SURFACE
*LOAD_SHELL_ELEMENT

Example: Rectangular Cup Drawing

Filename: mat_transversely_anisotropic.cup-draw.k

Description:

This problem includes three tools a punch, a holder and a die, and a blank. The blank is drawn by moving the punch downwards to form around the die. The blank uses the *MAT_TRANSVERSELY_ANISOTROPIC_ELASTIC_PLASTIC material model.

Model:

The *BOUNDARY_PRESCRIBED_MOTION_RIGID keyword is used to give the punch a prescribed velocity in the z-direction. All shells on the holder are given a pressure load to clamp down on the blank (*LOAD_SHELL_ELEMENT). One way surface to surface contact is defined between the major parts in the model. Because of symmetry, only 1/4 of the system is modeled.

Results:

A contour plot of the effective stress on the blank after drawing is shown.

*MAT_TRANSVERSELY_ANISOTROPIC

Rectangular Cup Drawing

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Rectangular Cup Drawing
$
$ LSTC Example
$
$ Last Modified: October 14, 1997
$
$$$$ Original model received from Cray Research (John Gee) - 7/19/95
$
$ The model consists of 4 parts:
$   1 - blank (part that gets formed)
$   2 - die (fixed part that forms the shape)
$   3 - holder (holds the blank from top)
$   4 - punch (pushes down onto the blank)
$
$ The die, holder and punch are all rigid materials.
$
$ The blank is Mat #37
$      MAT_TRANSVERSELY_ANISOTROPIC_ELASTIC_PLASTIC
$
$ Units: ton, mm, s, N, MPa, N-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim    endcyc      dtmin     endeng     endmas
    .015
$
*CONTROL_CONTACT
$    slsfac    rwpnal      islchk      shlthk      penopt      thkchg      orien
    0.1        0.0          1            2            0            2            2
$    usrstr    usrfac      nsbccs      interm      xpenen
    0            0            0            0            4.0
$
*CONTROL_ENERGY
$    hgen       rwen      slnten      rylen
    2            1            2            0
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
    1            3            1            1            0.0
$
*CONTROL_SHELL
$    wrpang     itrlist     irnxx      istupd      theory      bwc       miter
    20.0        1           -1           1           2
$
$
*DATABSE_BINARY_D3PLOT
$    dt         lcdn
    0.002
$
*DATABSE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
```

***MAT_TRANSVERSELY_ANISOTROPIC**
Rectangular Cup Drawing

*MAT_TRANSVERSELY_ANISOTROPIC

Rectangular Cup Drawing

```
$  
$  
*DEFINE_CURVE  
$    lcid      sidr      scla      sclo      offa      offo  
        4  
$    absc      ordin  
    0.0,      0.0  
    1.0,      1.0  
$  
$  
*DEFINE_CURVE  
$    lcid      sidr      scla      sclo      offa      offo  
        5  
$    absc      ordin  
    0.0,      0.0  
    1.0E-03,   5.0  
    150.0E-03, 5.0  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Boundary Motion Conditions  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ The punch (part 4) is given a prescribed velocity in the z-direction.  
$$$ Velocity follows curve 1 (scaled by -20).  
$  
*BOUNDARY_PRESCRIBED_MOTION_RIGID  
$    nid      dof      vad      lcid      sf      vid  
        4       3       0       1     -20.0  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$ Define Parts and Materials  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
$$$$$$ PARTS  
$  
*PART  
$    pid      sid      mid      eosid      hgid      grav      adpopt  
blank  
        1       1       1  
die  
        2       2       2  
holder  
        3       2       3  
punch  
        4       2       3  
$  
$  
$$$$$$ Materials  
$  
*MAT_TRANSVERSELY_ANISOTROPIC_ELASTIC_PLASTIC  
$  
$    mat #37  
$    mid      ro       e       pr       sigy      etan      r      hlcid  
        1  0.787E-08  0.207E+06    0.280     127.6     0.0      1.0      2.0  
$
```

*MAT_TRANSVERSELY_ANISOTROPIC

Rectangular Cup Drawing

```

$ *MATERIAL
$   mid      ro      e      pr      n      couple      m      alias
$     2  0.787E-08 0.207E+06  0.280
$   cmo      con1      con2
$     1.0       7       7
$   lco/a1      a2      a3      v1      v2      v3
$ *MATERIAL
$   mid      ro      e      pr      n      couple      m      alias
$     3  0.787E-08 0.207E+06  0.280  0.0  0.0
$   cmo      con1      con2
$     1.0       4       7
$   lco/a1      a2      a3      v1      v2      v3
$ *SECTION_SHELL
$   sid      elform      shrf      nip      propt      qr/irid      icomp
$     1          2        1.0      3.0
$   t1      t2      t3      t4      nloc
$     0.80    0.80    0.80    0.80
$ *SECTION_SHELL
$   sid      elform      shrf      nip      propt      qr/irid      icomp
$     2          2        1.0      3.0
$   t1      t2      t3      t4      nloc
$ 1.0000E+03 1.0000E+00 1.0000E+00 1.0000E+00
$ *CONTACT_ONE_WAY_SURFACE_TO_SURFACE
$   ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$     3          2          0          0
$   fs      fd      dc      vc      vdc      penchk      bt      dt
$   0.000    0.000    0.0    0.0      5.0          0      0.0  30.0E-03
$   sfs      sfm      sst      mst      sfst      sfmt      fsf      vsf
$     1.0        1.0      0.80      1.00      1.0        1.0      1.0      1.0
$ *CONTACT_ONE_WAY_SURFACE_TO_SURFACE
$   5          4          0          0
$   0.000    0.000    0.0    0.0      5.0          0      0.0  30.0E-03

```

*MAT_TRANSVERSELY_ANISOTROPIC

Rectangular Cup Drawing

```
    1.0      1.0      0.80      1.00      1.0      1.0      1.0      1.0
$  
$  
*CONTACT_ONE_WAY_SURFACE_TO_SURFACE  
    7       6       0       0  
    0.000    0.000    0.0    0.0      5.0       0     0.0   30.0E-03  
    1.0      1.0      0.80      1.00      1.0      1.0      1.0      1.0
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Boundary Conditions  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*BOUNDARY_SPC_NODE  
  10061      0      1      1      0      0      0      0  
  10122      0      1      0      0      0      0      0  
.  
... in total, 101 SPC's defined  
. .  
  10059      0      0      1      0      0      0      0  
  10060      0      0      1      0      0      0      0
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Loading  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ All shells on the holder (part 3) are given a pressure boundary condition  
$$$$ to clamp down on the blank. The pressure follows load curve 5.  
$  
*LOAD_SHELL_ELEMENT  
$ esid    lcid      sf      at  
  30001      5 -1.00E+00      0.0  
  30002      5 -1.00E+00      0.0  
.  
... in total, 448 shell element loads defined  
. .  
  30447      5 -1.00E+00      0.0  
  30448      5 -1.00E+00      0.0
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$ Define Nodes and Elements  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*NODE  
$ nid          x          y          z          tc          rc  
  20001 6.700000000E+01 1.624058654E-14 -1.000000000E+01  
  20002 6.734069807E+01 2.462506303E-10 -7.41197155E+00  
.  
... in total, 4266 nodes defined  
. .  
  12500 1.666667211E+00 8.500000000E+01 1.000000000E+00
```

***MAT_TRANSVERSELY_ANISOTROPIC**
Rectangular Cup Drawing


```
12501 0.00000000E+00 8.50000000E+01 1.00000000E+00
$$$$$$$$$$ SHELL ELEMENTS
$*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
 40303      4    40333    40191    40001    40001
 40304      4    40334    40333    40001    40001
.
. . . in total, 4028 shells defined
.
.
 40411      4    40416    40417    40444    40443
 40412      4    40417    40418    40445    40444
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$$$$ Segment Sets for Contacts
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*SET_SEGMENT
$    sid      da1
      3      2400
$    n1      n2      n3      n4
 10001    10002    10063    10062
 10062    10063    10124    10123
.
. . . in total, 2400 segments defined
.
.
 12378    12379    12440    12439
 12439    12440    12501    12500
$.
. . . in total, 6 *SET_SEGMENT's defined (only the one above shown)
$*END
```

*MAT_TRANSVERSELY_ANISOTROPIC


Rectangular Cup Drawing

Results:

taurus g=d3plot
angle 1 rx -90
state 20 view

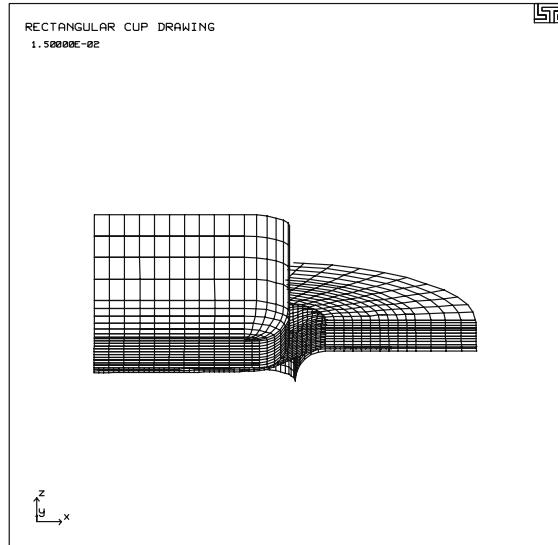

m 1
numc 10 mono
rx 25 contour 9

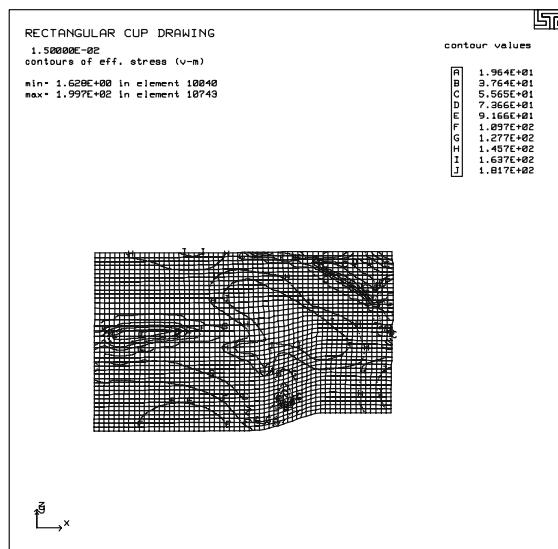

*RIGIDWALL_GEOMETRIC_SPHERE_MOTION

Rigid Wall Sphere Impacts a Plate

LS-DYNA Manual Section: *RIGIDWALL_GEOMETRIC_SPHERE_MOTION

Example: Rigid Wall Sphere Impacts a Plate

Filename: rigidwall_geometric_sphere.plate.k

Description:

A “Stonewall” - sphere impacts an elastic plate. (The sphere will not be shown in LS-TAURUS.)

Model:

The plate has an elastic material model with Belytschko-Tsay shell formulation. The plate is $40 \times 40 \times 2 \text{ mm}^3$. The sphere has a radius of 8 mm and its center is 9 mm above the plate. The sphere moves towards the plate with a prescribed displacement resulting in a velocity of velocity of 3 mm/second.

Input:

A spherical stonewall surface represents the true geometry of the ball. (*RIGIDWALL_GEOMETRIC_SPHERE_MOTION). The stonewall cards contain direction and load curve number defining the motion. All nodes of the plate are prevented from penetrating the sphere

Reference:

Schweizerhof, K. and Weimer, K.

*RIGIDWALL_GEOMETRIC_SPHERE_MOTION

Rigid Wall Sphere Impacts a Plate

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Geometric Sphere Impacting a Plate
$ 
$ LSTC Example
$ 
$ Last Modified: September 19, 1997
$ 
$ Units: ton, mm, s, N, MPa, N-mm
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$$ Control Ouput
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
     .5000E-3
$ 
*CONTROL_HOURGLASS
$    ihq        qh
     4
$ 
$ 
*DATABSE_BINARY_D3PLOT
$    dt        lcdn
     0.0200E-3
$ 
*DATABSE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
     1
$    cmpflg      ieverp      beamip
$ 
$ 
*DATABSE_RWFORC
$    dt
     0.005e-4
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$$ Rigidwalls
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*RIGIDWALL_GEOMETRIC_SPHERE_MOTION
$    nsid      nsidex      boxid
     0
$ 
$    xt        yt        zt        xh        yh        zh        fric
     20.0      20.0      9.0      20.0      20.0      0.0
$ 
$    radspf
     8.0
$ 
$    lcid      opt       vx        vy        vz
```

***RIGIDWALL_GEOMETRIC_SPHERE_MOTION**
Rigid Wall Sphere Impacts a Plate

```

           1       1      0.0      0.0     -1.0
$ 
$ 
*DEFINE_CURVE
$   lcid      sidr      sclx      scly      offa      offo
    1
$   abscissa      ordinate
    0.0      0.0
    0.0005     15.0
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$ Define Parts and Materials
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*PART
$   pid      sid      mid      eosid      hgid      adpopt
plate
    1       1       1
$ 
$ 
*MAT_ELASTIC
$   mid      ro      e      pr      da      db      k
    1   2.00e-08   100000.   0.300
$ 
$ 
*SECTION_SHELL
$   sid      elform      shrf      nip      propt      qr/irid      icomp
    1          0.83333      2.0      3.0
$   t1      t2      t3      t4      nloc
    2.0      2.0      2.0      2.0
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$ Define Nodes and Elements
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$ Nodes on the outside edges of the plate are constrained in z-translation.
$ 
*NODE
$   node      x      y      z      tc      rc
    1   0.000000E+00   0.000000E+00   0.000000E+00      3      0
    2   5.000000E+00   0.000000E+00   0.000000E+00      3      0
    3   1.000000E+01   0.000000E+00   0.000000E+00      3      0
    .
    ... in total, 81 nodes defined
    .
    79   3.000000E+01   4.000000E+01   0.000000E+00      3      0
    80   3.500000E+01   4.000000E+01   0.000000E+00      3      0
    81   4.000000E+01   4.000000E+01   0.000000E+00      3      0
$ 
$$$$ Shell Elements
$ 
*ELEMENT_SHELL
$   eid      pid      n1      n2      n3      n4
    1       1       1       2       11      10
    2       1       2       3       12      11
    3       1       3       4       13      12

```

***RIGIDWALL_GEOMETRIC_SPHERE_MOTION**

Rigid Wall Sphere Impacts a Plate


```
. . . in total, 64 shells defined  
62      1      69      70      79      78  
63      1      70      71      80      79  
64      1      71      72      81      80  
$  
*END
```

*RIGIDWALL_GEOMETRIC_SPHERE_MOTION


Rigid Wall Sphere Impacts a Plate

Results:

taurus g=d3plot
19
rx -60 ry 10 state 19 view

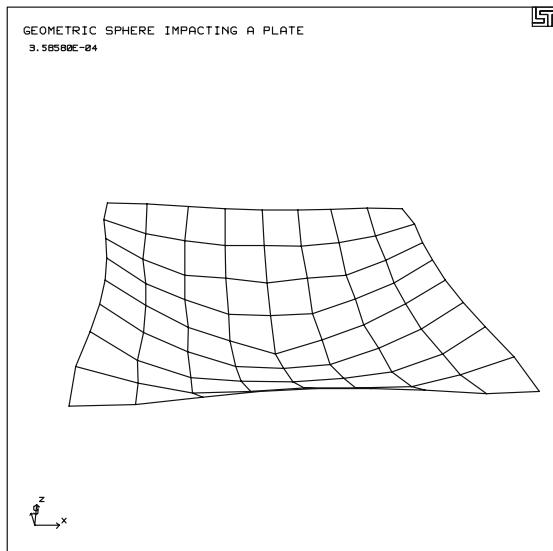

phs3
rwforc
normal

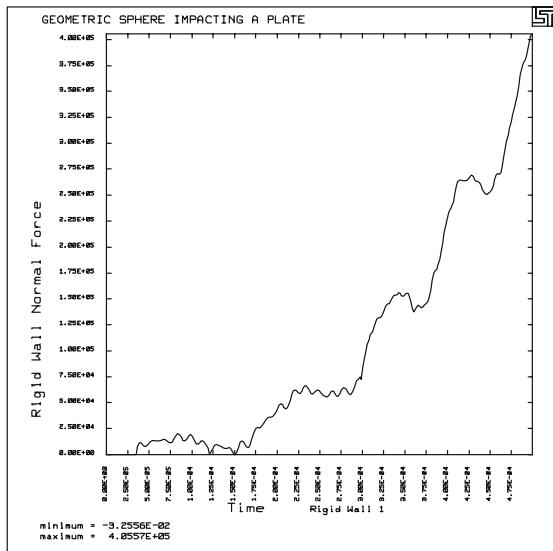

***RIGIDWALL_GEOMETRIC_SPHERE_MOTION**

Rigid Wall Sphere Impacts a Plate

***RIGIDWALL_PLANAR**
Rotating Shell Strikes Rigid Wall

LS-DYNA Manual Section: *RIGIDWALL_PLANAR

Additional Sections:

*INITIAL_VELOCITY_NODE

Example: Rotating Shell Strikes Rigid Wall

Filename: rigidwall_planar.shell.k

Description:

A rotating shell element strikes and rebounds from a rigid wall surface. The plate is modeled with shell elements for viewing in LS-TAURUS. This does not affect the calculation.

Model:

The shell element has an elastic material model with Belytschko-Tsay shell formulation. The plate measures $10 \times 10 \times 2$ mm³. The plate has an initial velocity of 100,000 mm/second in negative z-direction and an initial angular velocity of 100,000 radians/second about the y-axis. The rigid surface is modeled by an infinite smooth stonewall surface.

Input:

Nodes requiring initial velocity are specified with *INITIAL_VELOCITY_NODE. The location of the “Stonewall” is in the x-y plane with z=0 (*RIGIDWALL_PLANAR). The 4 nodes belonging to the shell element are slave nodes in the stonewall definition. The velocity components of the slave nodes in the normal direction to the stonewall are reset to zero at the moment of impact.

Reference:

Schweizerhof, K. and Weimer, K.

*RIGIDWALL_PLANAR

Rotating Shell Strikes Rigid Wall

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
STONEWALL SURFACE
$
$ LSTC Example
$
$ Last Modified: September 23, 1997
$
$ Units: ton, mm, s, N, MPa, N-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
  2.000E-04
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
  2          2
$
*
*DATABASE_BINARY_D3PLOT
$      dt        lcdn
  1.000E-05
$
*DATABASE_BINARY_D3THDT
$      dt        lcdn
  2.000E-03
$
*DATABASE_GLSTAT
$      dt
  4.0e-06
$
*DATABASE_NODOUT
$      dt
  4.0e-06
$
*DATABASE_HISTORY_NODE
$      i          i          i          i          i          i          i          i
$    id1        id2        id3        id4        id5        id6        id7        id8
  12         13         101
$
*DATABASE_RWFORC
$      dt
  4.0e-06
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Rigidwalls
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
```

***RIGIDWALL_PLANAR**
Rotating Shell Strikes Rigid Wall

```
$$$$ The nodes in set 1 (nodes of the moving shell) are prevented from
$$$$ penetrating the rigidwall.
$*
*RIGIDWALL_PLANAR
$    nsid      nsidex      boxid
        1
$*
$    xt       yt       zt       xh       yh       zh       fric
20.000    20.000    0.000   20.00000  20.00000  100.000
$*
$*
*SET_NODE_LIST
$    sid
        1
$    nid1      nid2      nid3      nid4      nid5      nid6      nid7      nid8
101       102       103       104
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$ Initial Conditions
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
$$$$ Nodes of the moving shell are given an initial tran and rot velocity.
$*
*INITIAL_VELOCITY_NODE
$    nid      vx       vy       vz       vxe      vye      vze
101 0.000E+00 0.000E+00-1.000E+05 0.000E+00 1.000E+05 0.000E+00
102 0.000E+00 0.000E+00-1.000E+05 0.000E+00 1.000E+05 0.000E+00
103 0.000E+00 0.000E+00-1.000E+05 0.000E+00 1.000E+05 0.000E+00
104 0.000E+00 0.000E+00-1.000E+05 0.000E+00 1.000E+05 0.000E+00
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$ Define Parts and Materials
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
*PART
$    pid      sid      mid      eosid      hgid      adpopt
wall
        1       1       1
moving-shell
        2       2       2
$*
$*
*MAT_ELASTIC
$    mid      ro       e       pr      da      db      k
        1 1.000E-08 1.000E+05 3.000E-01
$*
*MAT_ELASTIC
$    mid      ro       e       pr      da      db      k
        2 1.000E-08 1.000E+05 3.000E-01
$*
$*
*SECTION_SHELL
$    sid      elform      shrf      nip      propt      qr/irid      icomp
```

*RIGIDWALL_PLANAR

Rotating Shell Strikes Rigid Wall


```
      1      2   0.83333 2.000E+00 3.000E+00 0.000E+00
$    t1      t2      t3      t4      nloc
 1.000E+00 1.000E+00 1.000E+00 1.000E+00 0.000E+00
$ *SECTION_SHELL
$     sid    elform      shrf      nip      propt      qr/irid      icomp
      2      2   0.83333 2.000E+00 3.000E+00 0.000E+00
$    t1      t2      t3      t4      nloc
 2.000E+00 2.000E+00 2.000E+00 2.000E+00 0.000E+00
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $$$$ Define Nodes and Elements
$ $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ $...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ *NODE
$   node      x          y          z      tc      rc
 1 0.000000000E+00 0.000000000E+00 0.000000000E+00      7      0
 2 1.000000000E+01 0.000000000E+00 0.000000000E+00      7      0
 3 2.000000000E+01 0.000000000E+00 0.000000000E+00      7      0
.
.     ... in total, 29 nodes defined
.
 102 2.500000000E+01 1.500000000E+01 1.000000000E+01      0      0
 103 1.500000000E+01 2.500000000E+01 1.000000000E+01      0      0
 104 2.500000000E+01 2.500000000E+01 1.000000000E+01      0      0
$ $$$$ Shell Elements - All shells except 101 are for display of the Rigidwall
$ *ELEMENT_SHELL
$   eid    pid      n1      n2      n3      n4
 1      1      1      2      7      6
 2      1      2      3      8      7
 3      1      3      4      9      8
 4      1      4      5      10      9
 5      1      6      7      12      11
 6      1      7      8      13      12
 7      1      8      9      14      13
 8      1      9      10      15      14
 9      1     11      12      17      16
 10     1     12      13      18      17
 11     1     13      14      19      18
 12     1     14      15      20      19
 13     1     16      17      22      21
 14     1     17      18      23      22
 15     1     18      19      24      23
 16     1     19      20      25      24
 101    2     101     102     104     103
$ *END
```

*RIGIDWALL_PLANAR


Rotating Shell Strikes Rigid Wall

Results:

taurus g=d3plot
19
udg 1 state 9 rx -80 view

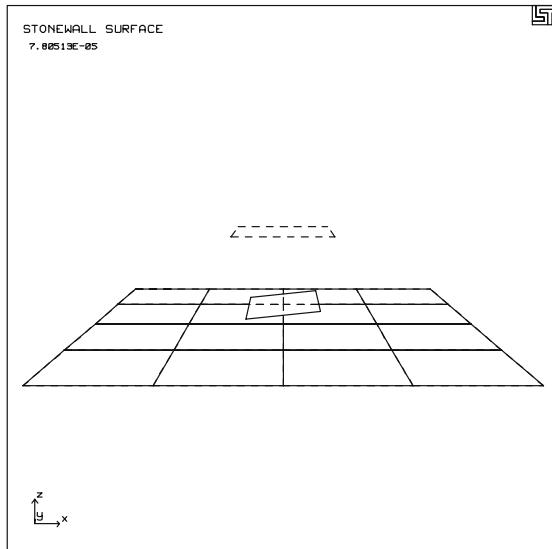

phs3
rwforc
normal

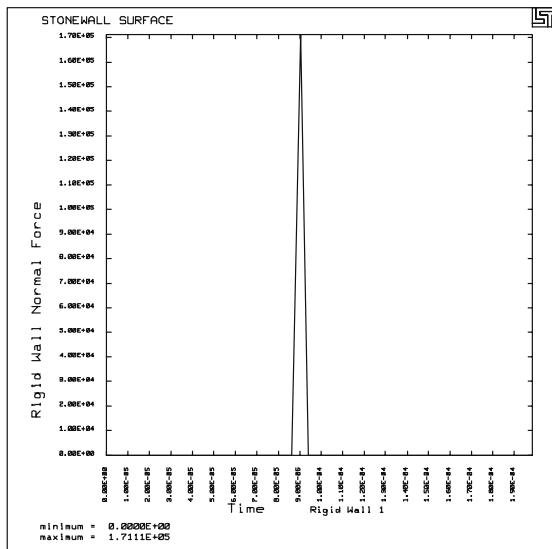

***RIGIDWALL_PLANAR**
Rotating Shell Strikes Rigid Wall

*RIGIDWALL_PLANAR_FORCE

Cube Rebounding

LS-DYNA Manual Section: *RIGIDWALL_PLANAR_FORCE

Example: Cube Rebounding

Filename: rigidwall_planar.cube.k

Description:

A cube impacts and rebounds from a rigid plate (“Stonewall”). The plate is modeled with shell elements for viewing in LS-TAURUS.

Model:

The cube measures $10 \times 10 \times 10 \text{ mm}^3$ and is 10 mm above the rigid plate. It has 8 brick elements with elastic material properties. The initial velocity of the cube is 100,000 mm/second. The plate is an infinite “Stonewall” - surface

Input:

The box option defines the nodes with the initial velocity (*DEFINE_BOX, *INITIAL_VELOCITY). The location of the “Stonewall” is at z=0 (*RIGIDWALL_PLANAR_FORCE). The nine nodes on the lower side of the cube are slave nodes to the “Stonewall” definition. The soft option of the rigidwall is used, which means that the slave nodes will come to stop within 10 time steps of initial contact with the rigidwall.

Reference:

Schweizerhof, K. and Weimer, K.

*RIGIDWALL_PLANAR_FORCES

Cube Rebounding

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
STONEWALL SURFACE
$
$ LSTC Example
$
$ Last Modified: September 22, 1997
$
$ Units: ton, mm, s, N, MPa, N-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
     .4001E-3
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
     2           2
$
*CONTROL_HOURGLASS
$    ihq         qh
     4
$
$
*DATABASE_BINARY_D3PLOT
$    dt          lcdn
     0.0200E-3
$
*DATABASE_BINARY_D3THDT
$    dt          lcdn
     .0010E-3
$
*DATABASE_GLSTAT
$    dt
     4.0e-06
$
*DATABASE_NODOUT
$    dt
     4.0e-06
$
*DATABASE_HISTORY_NODE
$    id1        id2        id3        id4        id5        id6        id7        id8
     13         201
$
*DATABASE_RWFORC
$    dt
     4.0e-06
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$$ Rigidwalls
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
```

*RIGIDWALL_PLANAR_FORCESS

Cube Rebounding

```

$ . . . > . . . 1 . . . > . . . 2 . . . > . . . 3 . . . > . . . 4 . . . > . . . 5 . . . > . . . 6 . . . > . . . 7 . . . > . . . 8
$ . . .
* RIGIDWALL_PLANAR_FORCESS
$ nsid nsidex boxid
    1      0      0
$ .
$ xt      yt      zt      xh      yh      zh      fric
    20.0    20.0    0.0    20.0    20.0   100.0   0.000
$ .
$ soft    ssid    nid1    nid2    nid3    nid4
    10      0      1      4      13      16
$ .
$ .
* SET_NODE_LIST
$ sid
    1
$ .
$ nid1    nid2    nid3    nid4    nid5    nid6    nid7    nid8
    201     202     203     204     205     206     207     208
    209
$ .
$ #####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####
$ .
$ #####$ Initial Conditions
$ .
$ #####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####
$ .
$ . . . > . . . 1 . . . > . . . 2 . . . > . . . 3 . . . > . . . 4 . . . > . . . 5 . . . > . . . 6 . . . > . . . 7 . . . > . . . 8
$ .
$ #####$ All nodes located within box 1 are given an initial velocity.
$ .
* INITIAL_VELOCITY
$ nsid nsidex boxid
    1
$ vx      vy      vz
    0.0     0.0   -100000.0
$ .
* DEFINE_BOX
$ boxid  xmm  xmx  ymn  ymx  zmn  zmx
    1    14.9  25.1  14.9  25.1   9.0  21.0
$ .
$ #####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####
$ .
$ #####$ Define Parts and Materials
$ .
$ #####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####$#####
$ .
$ . . . > . . . 1 . . . > . . . 2 . . . > . . . 3 . . . > . . . 4 . . . > . . . 5 . . . > . . . 6 . . . > . . . 7 . . . > . . . 8
$ .
* PART
$ pid sid mid eosid hgid adpopt
wall-display    1      1      1
cube           2      2      2      0      0      0
$ .
$ .
* MAT_ELASTIC
$ mid ro e pr da db
    1  2.00e-8 100000.0   0.300
$ .
* MAT_ELASTIC

```

*RIGIDWALL_PLANAR_FORCES

Cube Rebounding


```
$      mid      ro      e      pr      da      db
      2    1.00e-8  100000.0   0.300
$      *
$      *
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
      1            0.83333  2.0        3.0
$      t1      t2      t3      t4      nloc
      2.0      2.0      2.0      2.0
$      *
*SECTION_SOLID
$      sid      elform
      2
$      *
$      **** Define Nodes and Elements
$      ****
$      ****>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      *
*NODE
$      node      x      Y      z      tc      rc
      1    5.000000E+00  5.000000E+00  0.000000E+00  7      0
      4    3.500000E+01  5.000000E+00  0.000000E+00  7      0
      13   3.500000E+01  3.500000E+01  0.000000E+00  0      0
      .
      ... in total, 31 nodes defined
      .
      201   1.500000E+01  1.500000E+01  1.000000E+01  0      0
      225   1.500000E+01  2.500000E+01  2.000000E+01  0      0
      226   2.000000E+01  2.500000E+01  2.000000E+01  0      0
      227   2.500000E+01  2.500000E+01  2.000000E+01  0      0
$
$      **** Shell Elements - For Display of the Rigidwall
$      *
*ELEMENT_SHELL
$      eid      pid      n1      n2      n3      n4
      1       1       1       4      13      16
$
$      **** Solid Elements
$      *
*ELEMENT_SOLID
$      eid      pid      n1      n2      n3      n4      n5      n6      n7      n8
      101     2      201     202     205     204     210     211     214     213
      102     2      202     203     206     205     211     212     215     214
      103     2      204     205     208     207     213     214     217     216
      104     2      205     206     209     208     214     215     218     217
      105     2      210     211     214     213     219     220     223     222
      106     2      211     212     215     214     220     221     224     223
      107     2      213     214     217     216     222     223     226     225
      108     2      214     215     218     217     223     224     227     226
$
*END
```

*RIGIDWALL_PLANAR_FORCES


Cube Rebounding

Results:

taurus g=d3plot
19
rx -80 view

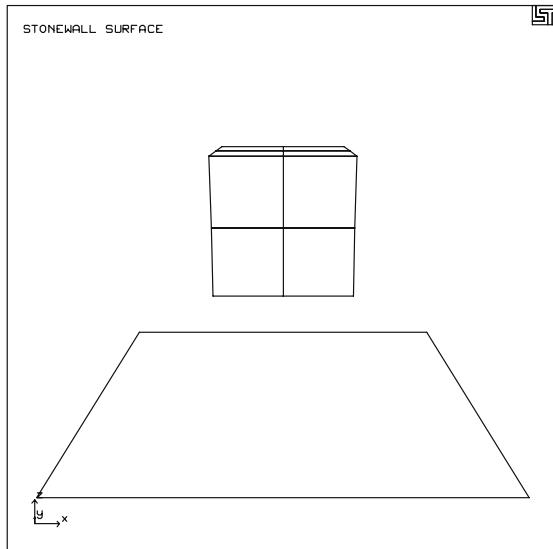

phs3 glstat
otxt Kinetic and Stonewall Energy
oset 0 5.25e4 kinetic over stonewall

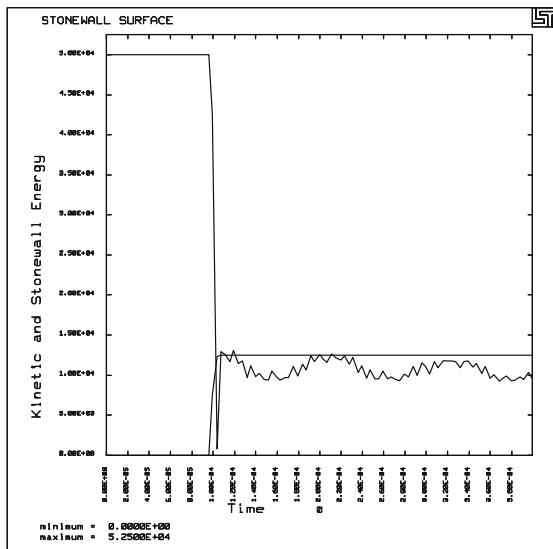

***RIGIDWALL_PLANAR_FORCE**

Cube Rebounding

*RIGIDWALL_PLANAR_MOVING

Symmetric Crush Tube

LS-DYNA Manual Section: *RIGIDWALL_PLANAR_MOVING

Additional Sections:

*CONTACT_AUTOMATIC_SINGLE_SURFACE

Example: Symmetric Crush Tube

Filename: rigidwall_planar.symtube.k

Description:

A tube is crushed using a planar, moving rigid wall.

Model:

Because of symmetry , only 1/4 of the system is modeled. Automatic single surface contact is defined to prevent penetrations as the tube folds on itself. The bottom nodes of the tube are fixed using SPC's. The top of the tube is hit by a rigid wall that is defined with a mass of 800 kg and an initial velocity of 8.94 mm/ms in the negative z-direction. The friction coefficient on the wall is 1.0, this means that the nodes are prevented from sliding along the plane of the wall. An extra node is defined and associated with the rigid wall so that the walls velocity and displacement can be tracked in the ascii output file nodout (node id 99999).

Results:

The tubes crush and the wall forces from the ascii output file rwforc are shown. The force-deflection of the crush tube can be obtained by using the force data from rwforc and the displacement data from nodout.

*RIGIDWALL_PLANAR_MOVING

Symmetric Crush Tube

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Symmetric Short Crush Tube Impacted by a Moving Wall
$
$ LSTC Example
$
$ Last Modified: October 10, 1997
$
$ Symmetric model - 1/4 of the tube
$   - Remove corner elements on desired initial crush area (2 shells)
$     shells commented out: 409, 410
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
      15.01        0          0.0        0.0        0.0
$
*CONTROL_ENERGY
$    hgen        rwen       slnten      rylen
      2            2          2
$
*CONTROL_OUTPUT
$    npopt      neecho      nrefup      iaccop      opifs      ipnint      ikedit
      1            3
$
*
*DATABASE_BINARY_D3PLOT
$    dt         lcdt
      1.0
$
*DATABASE_EXTENT_BINARY
$    neiph      neips      maxint      strflg      sigflg      epsflg      rltflg      engflg
$
$    cmpflg      ieverp      beamip
      1
$
*DATABASE_BINARY_D3THDT
$    dt         lcdt
      999999
$
*DATABASE_GLSTAT
$    dt
      0.1
$
*DATABASE_MATSUM
$    dt
      0.1
$
*DATABASE_NODOUT
$    dt
      0.1
```

*RIGIDWALL_PLANAR_MOVING

Symmetric Crush Tube

```

$*
*DATABASE_HISTORY_NODE
$    id1      id2      id3      id4      id5      id6      id7      id8
$        99999     414     486
$*
*DATABASE_RWFORC
$    dt
$        0.1
$*
*DATABASE_SLEOUT
$    dt
$        0.1
$*
$$$$$$ Define Contacts - Sliding Interfaces
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
*CONTACT_AUTOMATIC_SINGLE_SURFACE
$    ssid      msid      sstyp      mstyp      sboxid      mboxid      spr      mpr
$        0
$    Equating ssid to zero means that all segments are included in the contact
$*
$    fs      fd      dc      vc      vdc      penchk      bt      dt
$        0.08     0.08
$*
$    sfs      sfm      sst      mst      sfst      sfmt      fsf      vsf
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$$$ Define Rigidwalls
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
*RIGIDWALL_PLANAR_MOVING_FORCES
$    nsid      nsindex      boxid
$        0          0          0
$*
$    xt      yt      zt      xh      yh      zh      fric
$        0.0      0.0     274.0      0.0      0.0      0.0      1.0
$*
$    sw mass      sw vel
$    800.000     8.94000
$*
$    soft      ssid      node1      node2      node3      node4
$        0          0      99999
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$$$$$$ Define Parts and Materials
$*
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$*
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$*
*PART

```

*RIGIDWALL_PLANAR_MOVING

Symmetric Crush Tube

```
$      pid      sid      mid      eosid      hgid      grav      adopt
corner1          1          1          1
$ 
$ 
*MAT_PIECEWISE_LINEAR_PLASTICITY
$      mid      ro      e      pr      sigy      etan      eppf      tdel
$          1  7.830E-06      200.0      0.3      0.207
$ 
$      c      p      lcss      lcsr
$          40          5
$ PLASTIC STRESS/STRAIN CURVES
$      eps1      eps2      eps3      eps4      eps5      eps6      eps7      eps8
$      0.000      0.080      0.160      0.400      0.750
$      es1      es2      es3      es4      es5      es6      es7      es8
$      0.207      0.250      0.275      0.290      0.300
$ 
$ 
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
$          1          2          3.0000
$      t1      t2      t3      t4      nloc
$          2.00          2.00          2.00          2.00
$ 
$ ##### Define Constraints and Boundary
$ 
$ ##### Nodal single point constraints (SPC's)
$     - fix on bottom of tube
$     - symmetry along both sides of tube
$ 
*BOUNDARY_SPC_NODE
$      nid cid x y z rx ry rz
$          1,  0,1,1,1,  1,  1,  1
$          2,  0,1,1,1,  1,  1,  1
$ 
$     ... in total, 86 SPC's defined
$ 
$     252,  0,1,0,0,  0,  1,  1
$     259,  0,1,0,0,  0,  1,  1
$ 
$ ##### Define Nodes and Elements
$ 
$ ##### Node definitions
$ 
$     ... in total, 519 nodes defined
$ 
```

***RIGIDWALL_PLANAR_MOVING**
Symmetric Crush Tube


```
715 -5.80000000E+01 -2.40000000E+01 2.724830000E+02      0      0
716 -5.80000000E+01 -3.20000000E+01 2.724830000E+02      0      0
$  
$$$$$$$$$     Shell Elements  
$  
*ELEMENT_SHELL  
$    eid      pid      n1      n2      n3      n4
  752       1      547      552      553      553
  753       1      553      548      547      547
    1       1       1       2       9       8
    2       1       2       3      10       9
  .
  ...   in total, 467 shells defined
  .
  640       1      710      711      716      715
  641       1      711      485      487      716
$  
*END
```

*RIGIDWALL_PLANAR_MOVING


Symmetric Crush Tube

Results:

taurus g=d3plot
angle 1 rx -90 xtrans -80 view
xtrans 160 state 16 over view

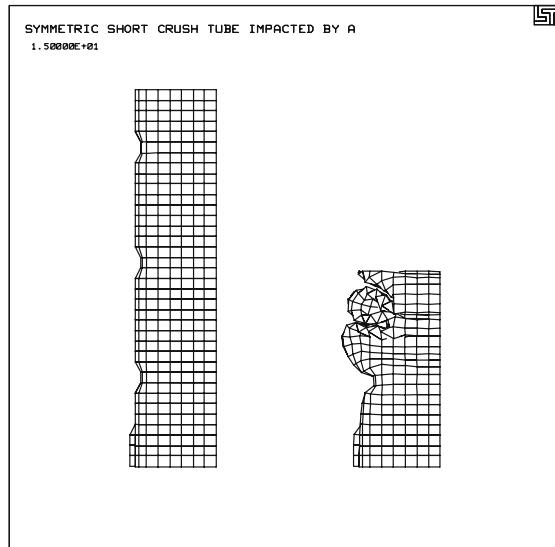

phs3
rwforc
oscl -1 normal

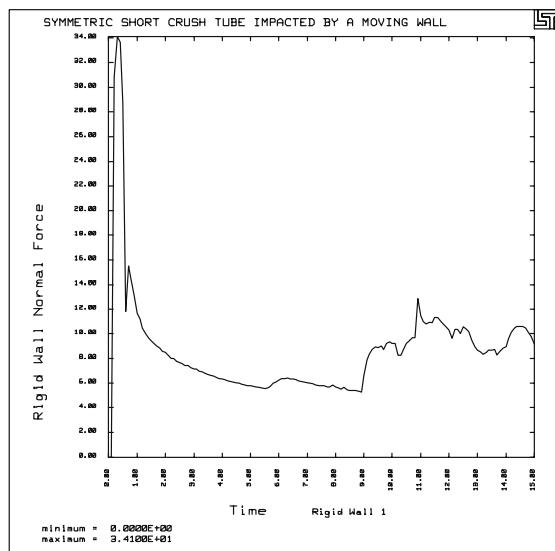

*SECTION_SHELL

Fuse Plate in Tension Exhibits Hourgassing

LS-DYNA Manual Section: *SECTION_SHELL

Additional Sections:

*CONSTRAINED_SPOTWELD

*LOAD_NODE_POINT

Example: Fuse Plate in Tension Exhibits Hourgassing

Filename: section_shell.hourgassing.k

Description:

A fuse plate is used to connect a cut in a wide flange beam. The beam is loaded at an end, putting the fuse plate in tension. In this loading condition, the fuse plate exhibits a great deal of hourgassing.

Model:

The fuse plate and beam are constructed with shell elements and a piecewise linear plasticity material model with failure. The fuse plate is connected to the beam using spot welds (*CONSTRAINED_SPOTWELD). One end of the beam is fixed with SPC's, while the other end has several nodal point loads (*BOUNDARY_SPC_NODE, *LOAD_NODE_POINT). Multiple point loads are used to better distribute the input loads.

Results:

One look at the figures explains why it's called "hourgassing". To fix the hourgassing problem the fuse plate could be re-meshed or a fully integrated shell element formulation could be used.

***SECTION_SHELL**

Fuse Plate in Tension Exhibits Hourgassing

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
Fuse plate being pulled a part exhibits hourgassing troubles.
$
$ LSTC Example
$
$ Last Modified: October 14, 1997
$
$ Really good hourgassing on fuse plate - part 3
$
$ Switch to shell formulation S/R Hughes-Liu (6) - eliminates HG
$     ==> *SECTION_SHELL - ELFORM
$
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim      endcyc      dtmin      endneg      endmas
        10.01
$
*CONTROL_ENERGY
$    HGEN          RWEN      SLNTEN      RYLEN
        2            2           1           1
$
*CONTROL_OUTPUT
$    NPOPT      NEECHO      NREFUP      IACCP      OPIFS      IPNINT      IKEDIT
        1            3
$
$
*DATABASE_BINARY_D3PLOT
$    dt      lcdn
        1.0
$
*DATABASE_BINARY_D3THDT
$    dt      lcdn
        999999
$
*DATABASE_GLSTAT
$    dt
        0.1
$
*DATABASE_MATSUM
$    dt
        0.1
$
*DATABASE_SWFORC
$    dt
        0.1
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$$ Constrain the Plates Together
```

***SECTION_SHELL**
Fuse Plate in Tension Exhibits Hourgassing

```
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$$$  Spotweld the fuse plate to the post flanges.  
$  
*CONSTRAINED_SPOTWELD  
$      n1      n2      sn      sf      n      m  
284      511  
247      512  
428      527  
417      517  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$  Boundary and Loading Conditions  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*BOUNDARY_SPC_NODE  
$      nid      cid      x      y      z      rx      ry      rz  
150      0      1      1      1      1      1      1  
151      0      1      1      1      1      1      1  
152      0      1      1      1      1      1      1  
179      0      1      1      1      1      1      1  
180      0      1      1      1      1      1      1  
181      0      1      1      1      1      1      1  
204      0      1      1      1      1      1      1  
205      0      1      1      1      1      1      1  
$  
*LOAD_NODE_POINT  
$      nid      dof      lcid      sf      cid      m1      m2      m3  
17      1      2 2.000E+03      0  
18      1      2 2.000E+03      0  
19      1      2 2.000E+03      0  
61      1      2 2.000E+03      0  
62      1      2 2.000E+03      0  
63      1      2 2.000E+03      0  
100     1      2 2.000E+03      0  
101     1      2 2.000E+03      0  
$  
*DEFINE_CURVE  
$      lcid      sidr      scla      sclo      offa      offo  
2  
$          abscissa      ordinate  
0.00000000000000E+00 1.00000000000000E+00  
1.00000000000000E+04 1.00000000000000E+04  
$  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$$$$$  Define Parts and Materials  
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$  
$  
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8  
$  
*PART  
$      pid      sid      mid      eosid      hgid      grav      adpopt  
pstflang
```

*SECTION_SHELL

Fuse Plate in Tension Exhibits Hourgassing

```
      1          1          1
postweb
      2          2          1
fuseplat
      3          3          1
$  
$  
$$$$  Materials
$  
$  
*MAT_PIECEWISE_LINEAR_PLASTICITY
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$      mid      ro      e      pr      sigy      etan      eppf      tdel
      1 0.783E-05 2.000E+02      0.3 2.070E-01      7.500E-01
$  Cowper/Symonds Strain Rate Parameters
$      c      p      lcsp      lcsr
      40      5
$  Plastic stress/strain curve
 0.000E+00 8.000E-02 1.600E-01 4.000E-01 9.900E+01
 2.070E-01 2.500E-01 2.750E-01 2.899E-01 3.000E-01
$  
$  
$$$$  Sections
$  
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
      1          6
$      t1      t2      t3      t4      nloc
5.4600E+00 5.460E+00 5.460E+00 5.460E+00
$  
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
      2          6
$      t1      t2      t3      t4      nloc
4.3200E+00 4.320E+00 4.320E+00 4.320E+00
$  
$  
*SECTION_SHELL
$      sid      elform      shrf      nip      propt      qr/irid      icomp
      3          2
$      3          6
$      t1          t2          t3          t4      nloc
4.7625E+00 4.762E+00 4.762E+00 4.762E+00
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$$$$  Define Nodes and Elements
$  
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$  
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
*NODE
$      node          x          y          z      tc      rc
      1 0.000000000E+00 7.500000000E+01 2.337080000E+03      0          0
      2 8.750000000E+01 5.000000000E+01 2.360630000E+03      0          0
      .
      ...  in total, 522 nodes defined
      .
      675 0.000000000E+00 2.500000000E+01 2.286845000E+03      0          0
      676 0.000000000E+00 7.500000000E+01 2.286845000E+03      0          0
$
```

***SECTION_SHELL**
Fuse Plate in Tension Exhibits Hourgassing


```
$$$$$$$ Shell Elements
$  
*ELEMENT_SHELL
$    eid      pid      n1      n2      n3      n4
  487       1      647     123     501     501
  488       1      647     501     653     653
.
. . . in total, 436 shells defined
.
387       3      499     496     289     497
388       3      422     499     497     287
$  
*END
```

*SECTION_SHELL


Fuse Plate in Tension Exhibits Hourgassing

Results:

taurus g=d3plot
angle 1 rx -90 ry 60 m 3 center
zmax 50000 dist 30000 dam view

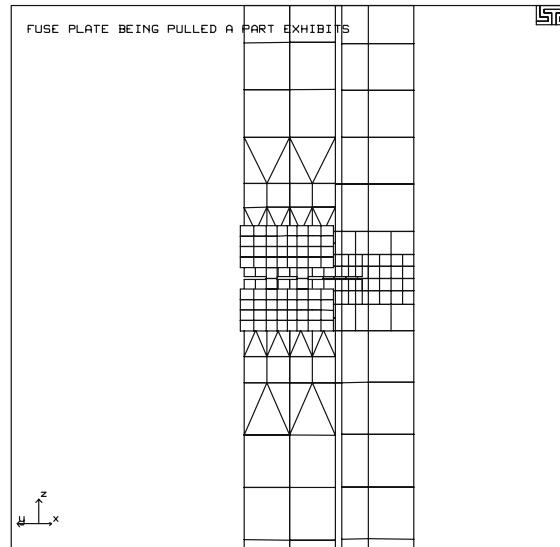

s 10
m 3
center view

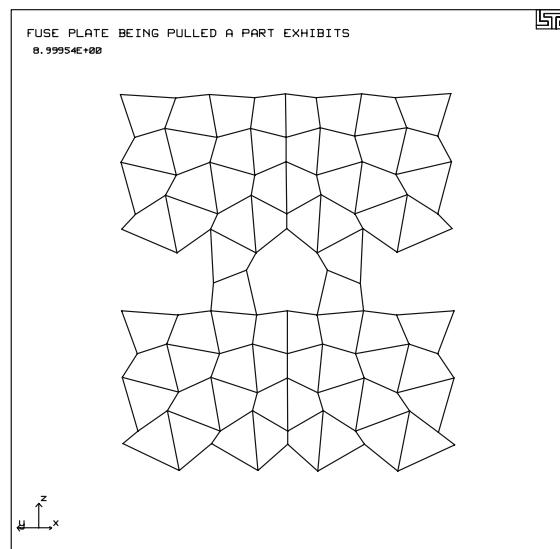

***SECTION_SOLID**
Breaking Post Exhibits Hourgassing

LS-DYNA Manual Section: *SECTION_SOLID

Additional Sections:

*CONTACT_ERODING_SINGLE_SURFACE
*INITIAL_VELOCITY_GENERATION

Example: Breaking Post Exhibits Hourgassing

Filename: section_solid.hourgassing.k

Description:

A rigid beam strikes a post near the top of the post. There is hole cut out of the lower portion of the post to reduce its' section modulus and thus, allow it to snap-off easier. In the first model, the post begins to break, but hourgassing starts to dominate the solution and the post does not completely snap.

In the second model, a fully integrated solid formulation is used for the post, causing the post to snap-off as desired.

Model:

The beam is constructed with rigid shell elements. An initial velocity is given to the beam using the *INITIAL_VELOCITY_GENERATION keyword. The post is constructed with solid elements using a piecewise linear plasticity material model with failure. Single point constraints (SPC's) are placed on the bottom of the post. Eroding single surface contact is required in order for the contact to behave properly while the post snaps in two (*CONTACT_ERODING_SINGLE_SURFACE).

Results:

The first model results are significantly different than the second model due to hourgassing.

***SECTION_SOLID**

Breaking Post Exhibits Hourgassing

List of LS-DYNA input deck:

```
*KEYWORD
*TITLE
A post with a hole is hit by a beam and is supposed to snap at the hole.
$
$ LSTC Example
$
$ Last Modified: October 15, 1997
$
$$ This model uses constant stress solid element formulation (default: type 1)
$$ for the posts and default hourglass viscosity type 1. This formulation
$$ results in considerable hourgassing and incomplete failure of the post.
$
$ By switching the solid element formulation to fully integrated S/R (type 2)
$ results are much cleaner.
$
$ Units: mm, kg, ms, kN, GPa, kN-mm
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$$$$ Control Ouput
$
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$
*CONTROL_TERMINATION
$    endtim    endcyc      dtmin     endneg     endmas
      5.00
$
*CONTROL_ENERGY
$    hgen      rwen      slnten     rylen
      2          2
$
*CONTROL_OUTPUT
$    npopt    neecho      nrefup     iaccop     opifs      ipnint     ikedit
      1          3
$
$
*DATABASE_BINARY_D3PLOT
$    dt      lcdt
      0.5
$
*DATABASE_EXTENT_BINARY
$    neiph    neips      maxint     strflg     sigflg     epsflg     rltflg     engflg
$
$    cmpflg    ieverp     beamip
      1
$
*DATABASE_BINARY_D3THDT
$    dt      lcdt
      999999
$
*DATABASE_GLSTAT
$    dt
      0.10
$
*DATABASE_MATSUM
$    dt
      0.10
$
*DATABASE_NODOUT
```

***SECTION_SOLID**

*SECTION_SOLID

Breaking Post Exhibits Hourglassing

```
$...>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$  
$$$$ Part      3      shell: beam  
$  
$$$$ Part      4      solid: lower_post  
$  
$$$$ Part      5      solid: upper_post  
$  
$  
*PART  
$      pid      sid      mid      eosid      hgid      grav      adpopt  
bumper  
      3          1          1  
lower_post  
      4          2          2  
upper_post  
      5          2          3  
$  
$  
$$$$$ Materials  
$  
$$ Bumper - Rigid, constrained to translate only in the x-direction  
$  
*MAT_RIGID  
$      mid      ro      e      pr      n      couple      m      alias  
      1  0.143E-02    200.0    0.33  
$  
$      cmo      con1     con2  
      1.0        5          7  
$  
$      lco/a1    a2      a3      v1      v2      v3  
$  
$  
$ Post - the lower portion is softer and fails sooner than the upper portion  
$  
*MAT_PIECEWISE_LINEAR_PLASTICITY  
$      mid      ro      e      pr      sigy      etan      eppf      tdel  
      2  0.499E-06   11.37    0.32    0.0468  
$  
$      c          p      lcss      lcsr  
$      Plastic stress/strain curve  
      0.0000    0.2500  
      0.0468    0.0470  
$  
$  
*MAT_PIECEWISE_LINEAR_PLASTICITY  
$      mid      ro      e      pr      sigy      etan      eppf      tdel  
      3  0.499E-06   110.37   0.32    0.0468  
$  
$      c          p      lcss      lcsr  
$      Plastic stress/strain curve  
      0.0000    0.2500  
      0.0468    0.0470  
$  
$  
$$$$$ Sections  
$  
*SECTION_SHELL  
$      sid      elform      shrf      nip      propt      qr/irid      icomp
```

***SECTION_SOLID**
Breaking Post Exhibits Hourglassing

```

      1          2          3.0
$     t1        t2        t3        t4      nloc
$     1.54      1.54      1.54      1.54
$ 
$ 
*SECTION_SOLID
$     sid      elform
$     2          1
$ 
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$$$$ Define Nodes and Elements
$ 
$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$ 
$....>....1....>....2....>....3....>....4....>....5....>....6....>....7....>....8
$ 
*NODE
$     nid          x          y          z      tc      rc
$     32 -1.23794000E+02 1.20000000E+03 3.91000000E+02      0      0
$     33 -1.23794000E+02 1.25715000E+03 3.91000000E+02      0      0
.
... in total, 529 nodes defined
.
764 -7.37940000E+01 1.400030000E+03 5.068340000E+02      0      0
765 -7.37940000E+01 1.457180000E+03 5.068340000E+02      0      0
$ 
$$$$$$$$$$ Solid Elements
$ 
*ELEMENT_SOLID
$     eid      pid      n1      n2      n3      n4      n5      n6      n7      n8
$     1        4       163      172      175      166      164      173      176      167
$     2        4       172      181      184      175      173      182      185      176
.
... in total, 252 solids defined
.
333      5       389      639      705      489      390      640      706      490
335      5       489      705      707      491      490      706      708      492
$ 
$$$$$$$$$$ Shell Elements
$ 
*ELEMENT_SHELL
$     eid      pid      n1      n2      n3      n4
$     355      3       32       48       49       33
$     356      3       33       49       50       34
.
... in total, 70 shells defined
.
507      3       765      734      85       732
508      3       733      765      732      84
$ 
$ 
*END


```

*SECTION_SOLID


Breaking Post Exhibits Hourgassing

Results:

taurus g=d3plot
angle 1 rx -90 state 11
ry 10 rx 5 view

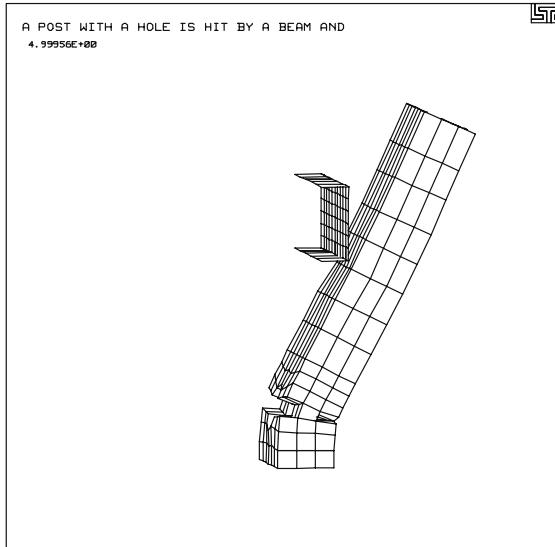


phs3 glstat
otxt Hourglass and Internal Energy
oset 0 4.8e4 hour over internal

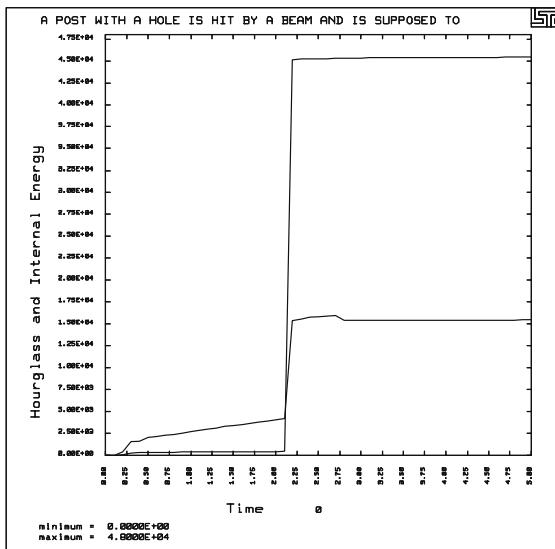


***SECTION_SOLID**
Breaking Post Exhibits Hourgassing

Results - No Hourgassing:

taurus g=d3plot
angle 1 rx -90 state 11
ry 10 rx 5 view

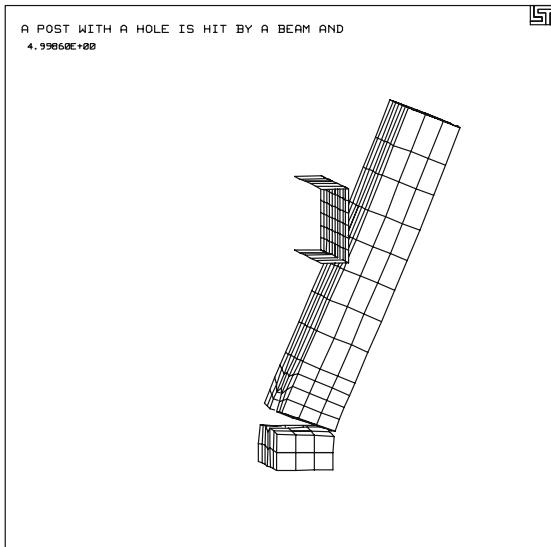

phs3 glstat
otxt Hourglass and Internal Energy
oset 0 4.8e4 hour over internal

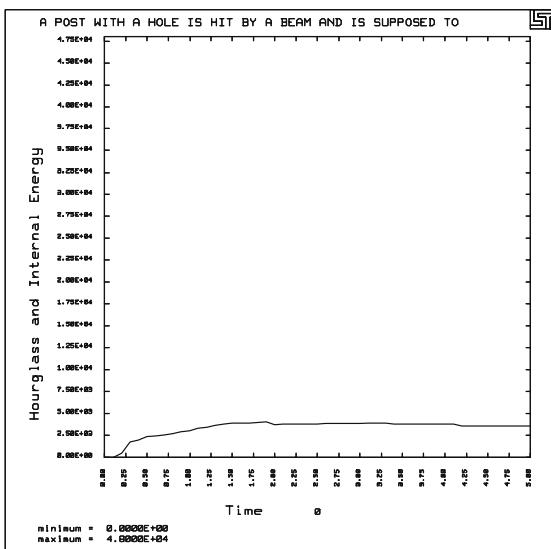

***SECTION_SOLID**

Breaking Post Exhibits Hourglassing

ACKNOWLEDGMENTS

Acknowledgments

N. Brannberg, L. Fredriksson and A. Gokstorp translated the description of many CADFEM examples from German to English.

Several of the new examples in the 1997 edition of this examples manual were constructed by starting with models obtained from Gene Paulsen (former Graduate student at U. Nebraska), John Gee (Cray Research), and Brad Maker (LSTC).

ACKNOWLEDGMENTS

References

- Avitzur, B., Handbook of Metal Forming Procedures, John Wiley & Sons, pp. 952-954, 1983
- Belytschko, T., Wong, B. L. and Chiang, H. Y. (Northwestern University) "Improvements in Low-Order Shell Elements for Explicit Transient Analysis", Analytical and Computation Models of Shells, Edited by Belytschko, T. and Simo, J., American Society of Mechanical Engineers, 1989.
- Kenchington, C. J., "A Non-Linear Elastic Material Model for DYNA3D", DYNA3D User Group Conference, Frazer-Nash Consultancy Ltd., 1988.
- Hallquist, J. O. and Wynn, D. J. "LS-TAURUS: An Interactive Post-Processor for the Analysis Codes LS-NIKE3D, LS-DYNA3D, and TOPAZ3D", Livermore Software Technology Corporation, 1992.
- Honecker, A and Mattiasson, K, Finite Element Procedures for 3D Sheet Forming Simulation, NUMIFORM 89, pp. 457-464, Balkema, 1989.
- Hughes, T. J. R., The Finite Element Method: Linear Static and Dynamic Finite Element Analysis, Stanford University, 1987.
- Lee, C.H., and Altan, T., "Influence of Flow Stress and Friction upon Metal Flow in Upset Forging of Rings and Cylinders," Journal of Engineering for Industry," pp. 775-782, August, 1972.
- Littlewood, T., Correspondence
- Schweizerhof, K. and Weimer, K. CADFEM GmbH, Anzinger Str. 11 D-8017 Ebersberg/Munich, Tel 08092 -24012. Correspondence.
- Stillman, D. W., Correspondence.
- Wei, Lixin, Correspondence, KBS2 Inc.

REFERENCES

Index

Content

- Airbag Deploys into Cylinder, 3
 - An Interface File Controls the Response of a Cube, 181
 - Bar Impact, 117
 - Belted Dummy, 227
 - Billet Upset, 135
 - Blow Molding, 11
 - Breaking Post Exhibits Hourgassing, 277
 - Cantilever Beam, 109
 - Cantilever Beam with Lobotto Integration, 175
 - Cube Rebounding, 259
 - Cylinder Undergoing Deformation with Adaptivity, 155
 - Deep Drawing with Adaptivity, 141
 - Discrete Nodes Tied to a Surface, 89
 - Fragmenting Plate, 209
 - Frazer Nash Single Element, 203
 - Fuse Plate in Tension Exhibits Hourgassing, 271
 - Hemispherical Load, 123
 - Hemispherical Punch, 101
 - Hinged Shell with Stop Angle (Revolute Joint), 35
 - Impulsively Loaded Cap with Shells and Solids, 47
 - Interaction of Pendulums, 167
 - Linearly Constrained Plate, 41
 - Projectile Penetrates Plate, 69
 - Rectangular Cup Drawing, 239
 - Rigid Sphere Impacts a Plate at High Speed, 75
 - Rigid Sphere Impacts Plate, 95
 - Rigidwall Sphere Impacts a Plate, 247
 - Rotating Elements, 191
 - Rotating Shell Strikes Stonewall, 253
 - Shell Rebounds from Plate Using Five Contact Types, 61
 - Sliding Block in Local Coordinate System, 215
 - Sliding Blocks with Planar Joint, 27
 - Soil and Foam Single Element, 221
 - Spotweld Secures Two Plates, 55
 - Square Crush Tube with Adaptivity, 149
 - Symmetric Crush Tube, 265
 - Tire Bounces on a Ground and Damps Out, 161
 - Tire Under Gravity Loading Bounces on a Rigidwall, 197
 - Twisted Cantilever Beam, 129
 - Two Plates Connected with Butt Welds, 19
-

INDEX

Filename

airbag.deploy.k, 3
boundary_prescribed_motion.blow-mold.k, 11
constrained.but-weld.k, 19
constrained.joint_planar.k, 27
constrained.joint_revolute.k, 35
constrained.linear.plate.k, 41
constrained.shell_solid.dome.k, 47
constrained.spotweld.plates.k, 55
contact.edge.k, 83
contact.n2s-sphere.k, 75
contact.plates.k, 61
contact.projectile.k, 69
contact.tied_nodes.box.k, 89
contact_entity.sphere.k, 95
control_adaptive.cup-draw.k, 141
control_adaptive.cylinder.k, 155
control_adaptive.square-beam.k, 149
control_contact.hemi-draw.k, 101
control_damping.beam.k, 109
control_energy.bar-impact.k, 117
control_shell.beam-twist.k, 129
control_shell.hemi-load.k, 123
control_timestep.billet-forge.k, 135
damping.tire.k, 161
deformable_to_rigid.pendulum.k, 167
deformable_to_rigid.pendulum.res, 167
integration_shell.lobotto.beam.k, 175
interface_component.cube.k, 181
interface_component.cube.rk, 181
load_body.gravity.k, 197
load_body.shell.k, 191
mat_fn_rubber.element.k, 203
mat_piecewise_linear.plate-shatter.k, 209
mat_rigid.block-slide.k, 215
mat_soil_foam.element.k, 221
mat_spring.belted-dummy.k, 227
mat_transversely_anisotropic.cup-draw.k, 239
rigidwall_geometric_sphere.plate.k, 247
rigidwall_planar(cube.k, 259
rigidwall_planar.shell.k, 253
rigidwall_planar.symtube.k, 265
section_shell.hourgassing.k, 271
section_solid.hourgassing.k, 277

Section

*AIRBAG_SIMPLE_AIRBAG_MODEL, 3
*BOUNDARY_PRESCRIBED_MOTION, 11
*BOUNDARY_PRESCRIBED_MOTION_NODE, 41, 191
*BOUNDARY_PRESCRIBED_MOTION_RIGID, 95
*BOUNDARY_PRESCRIBED_MOTION_SET, 55
*BOUNDARY_SPC_NODE, 167
*CONSTRAINED_EXTRA_NODES_SET, 27, 227
*CONSTRAINED_GENERALIZED_WELD, 19
*CONSTRAINED_JOINT_PLANAR, 27
*CONSTRAINED_JOINT_REVOLUTE, 35
*CONSTRAINED_JOINT_SPHERICAL, 227
*CONSTRAINED_JOINT_STIFFNESS, 35
*CONSTRAINED_LINEAR, 41
*CONSTRAINED_SHELL_TO_SOLID, 47
*CONSTRAINED_SPOTWELD, 55, 271
*CONSTRAINED_TIED_NODES_FAILURE, 75
*CONTACT, 61
*CONTACT_AUTOMATIC_SINGLE_SURFACE, 265
*CONTACT_ENTITY, 95
*CONTACT_ERODING_SINGLE_SURFACE, 277
*CONTACT_ERODING_SURFACE_TO_SURFACE, 69
*CONTACT_FORCE_TRANSDUCER_PENALTY, 83
*CONTACT_NODES_TO_SURFACE, 3, 75
*CONTACT_ONE WAY_SURFACE_TO_SURFACE, 239
*CONTACT_SINGLE_EDGE, 83
*CONTACT_SURFACE_TO_SURFACE, 227
*CONTACT_TIED_NODES_TO_SURFACE, 89
*CONTROL_ADAPTIVE, 141, 149, 155
*CONTROL_CONTACT, 101
*CONTROL_DAMPING, 109, 161
*CONTROL_ENERGY, 117
*CONTROL_SHELL, 123, 129
*CONTROL_SUBCYCLE, 149
*CONTROL_TIMESTEP, 35, 135
*DAMPING_GLOBAL, 109, 141, 161, 175
*DATABASE_CROSS_SECTION_PLANE, 19, 55
*DATABASE_CROSS_SECTION_SET, 55, 191
*DATABASE_CROSS_SECTION_SET, 109
*DEFINE_COORDINATE_VECTOR, 155, 215
*DEFINE_CURVE, 41
*DEFINE_SD_ORIENTATION, 227
*DEFORMABLE_TO_RIGID, 167
*ELEMENT_DISCRETE, 227
*INITIAL_VELOCITY, 61, 181
*INITIAL_VELOCITY_GENERATION, 69, 277

INDEX

*INITIAL_VELOCITY_NODE, 27, 191, 253
*INTEGRATION_SHELL, 175
*INTERFACE_COMPONENT, 181
*INTERFACE_LINKING_SEGMENT, 181
*LOAD_BODY_GENERALIZED, 191
*LOAD_BODY_Y, 167
*LOAD_BODY_Z, 161, 197, 227
*LOAD_NODE_POINT, 27, 175, 271
*LOAD_NODE_SET, 109
*LOAD_RIGID_BODY, 141
*LOAD_SEGMENT, 47
*LOAD_SEGMENT, 11, 27, 101, 215
*LOAD_SHELL_ELEMENT, 239
*MAT_DAMPER_VISCOUS, 227
*MAT_PIECEWISE_LINEAR_PLASTICITY, 209
*MAT_POWER_LAW_PLASTICITY, 101
*MAT_RIGID, 215
*MAT_SOIL_AND_FOAM, 221
*MAT_SPRING, 227
*MAT_TRANSVERSELY_ANISOTROPIC, 239
*PART_INERTIA, 227
*RIGID_DEFORMABLE_R2D, 167
*RIGIDWALL_GEOMETRIC_SPHERE_MOTION, 247
*RIGIDWALL_PLANAR, 3, 101, 197, 253
*RIGIDWALL_PLANAR_FORCES, 259
*RIGIDWALL_PLANAR_MOVING, 265
*SECTION_SHELL, 271
*SECTION_SOLID, 277